

CLASSIQUE AL1000



IP54



Benefits

- High performance bollard with excellent light distribution
- Extensively tested for vandal resistance
- Highly versatile with a wide range of applications from parks to security

Features

- Die-cast aluminium head unit with clear polycarbonate outer tube
- Bollard shaft of steel CHS tube
- Bollard shaft and head unit castings are finished in black, textured polyester coating
- Louvred light controller of pressed aluminium satin finish
- Integral control gear
- Symmetrical lighting distribution
- Supplied for root mounting as standard, with the option of flange plate fixing
- Mounting height 0.87m

Applications


- General
- Parks and gardens
- Security
- Pedestrian areas

Access

Access the lamp and control gear by removing the head unit (secured by a single vandal-resistant screw and twist-lock mechanism)

	Lamp wattage and type	Lamp holder	Description	Weight (Kg)	Windage (m ²)
AL1011	20/23W DULUX EL 50/80W HQL 50/70W SON-E	E27 E27 E27	Bollard: satin louvres integral gear	n/a	n/a


Key features



Mounting

Supplied for root mounting as standard Flange plate fixing available
Mounting height: 0.87m

Mounting height (m)

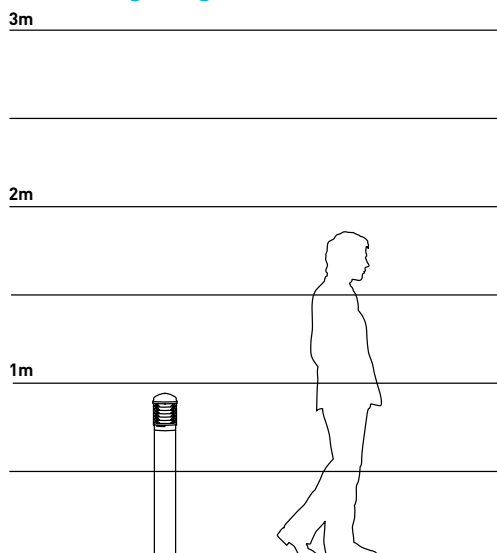

This could work for you

To find out more visit:
www.abacuslighting.com

All dimensions are in mm