Tree Heritage
Arboricultural Contractors and Consultants

Established 1982

South Moorlands Leisure Centre, Cheadle, Staffordshire

Tree planting proposals for screening of new pavilion off Thorley Drive

This area is fairly rural and I would suggest that you use native species with high conservation value. The following will thrive in most soils and get established fairly quickly.

Alder (Alnus glutinosa)
Silver Birch (Betula pendula or nigra)
Rowan (Sorbus aucuparia)
Field Maple (Acer campestre)
Holly (Ilex aquifolium)
Wild Cherry (Prunus avium)
Bird Cherry (Prunus padus)

I would plant these as feathered stock 150-180 cms. high apart form the Holly which would have to be much smaller as it does not transplant well.

H. E. Williams

Hugh Williams
Tree Heritage Ltd

Tree Heritage Ltd, 100 North Street, Leek, Staffordshire, ST13 8DQ
T: 01538 384019 M: 07976 822809 F: 01538 399812
E: treeheritageltd@btconnect.com W:www.treeheritage.co.uk

Registered Office: 50 Broad Street, Leek, Staffordshire. Registered No. 1655803 VAT N0. 368064436

International Society of Arboriculture 1924
Arboricultural Association®
APPROVED CONTRACTOR

CLASSIQUE AL1000

SECURITY | VANDAL RESISTANT 2 | IP54



Benefits

- High performance bollard with excellent light distribution
- Extensively tested for vandal resistance
- Highly versatile with a wide range of applications from parks to security

Features

- Die-cast aluminium head unit with clear polycarbonate outer tube
- Bollard shaft of steel CHS tube
- Bollard shaft and head unit castings are finished in black, textured polyester coating
- Louvred light controller of pressed aluminium satin finish
- Integral control gear
- Symmetrical lighting distribution
- Supplied for root mounting as standard, with the option of flange plate fixing
- Mounting height 0.87m

Applications

- General
- Parks and gardens
- Security
- Pedestrian areas

Access

Access the lamp and control gear by removing the head unit (secured by a single vandal-resistant screw and twist-lock mechanism)

	Lamp wattage and type	Lamp holder	Description	Weight (Kg)	Windage (m^2)
AL1011	20/23W DULUX EL 50/80W HQL 50/70W SON-E	E27 E27 E27	Bollard: satin louvres integral gear	n/a	n/a

Key features

1.



Mounting

Supplied for root mounting as standard Flange plate fixing available

Mounting height: 0.87m

All dimensions are in mm

Mounting height (m)

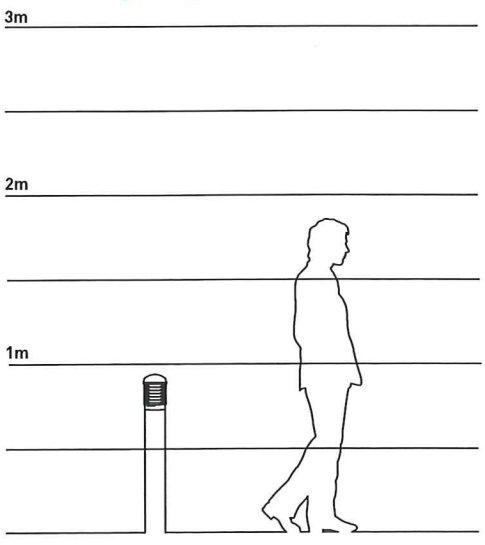



This could work for you

To find out more visit:
www.abacuslighting.com