


SCALE 1:200

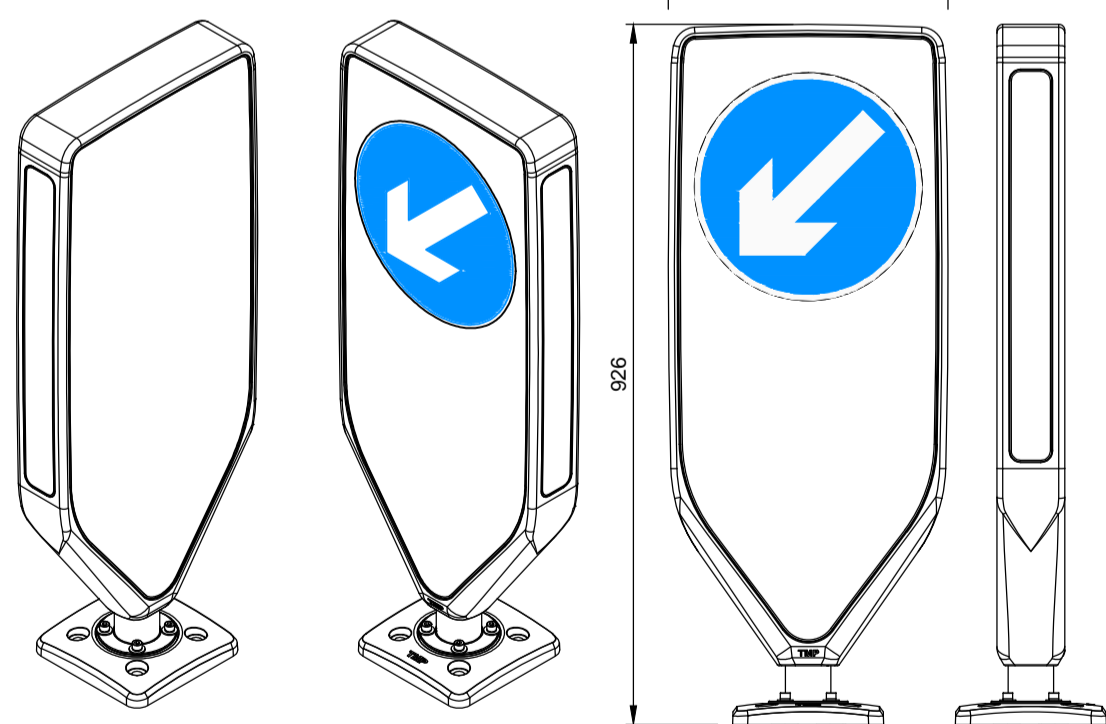

SIGN FACE EVO-S
 BORDER WHITE 4090T
 BLUE TRANSLUCENT
 ARROW WHITE 4090T
 230mm Ø
 DG3 (DIAMOND GRADE CUBED)
 BS EN 12899-2:2007 COMPLIANT

CLEAR ILLUMINATED BACK PLATE TO ROUNDEL AT 280mm DIAMETER


DRILL HOLES
 11mm-5mm Ø
 470mm-13mm Ø
 840mm-13mm Ø

FACING DIMENSIONS:
 WIDTH: 440mm
 HEIGHT: 800mm
 AREA: 0.3014 sq.m.
 APPLIED TO FRONT AND REAR FLUORESCENT YELLOW 4051 DG3 (DIAMOND GRADE CUBED) BS EN 12899-2:2007

SIDE STRIPS:
 WIDTH: 60mm
 HEIGHT: 520mm
 FLUORESCENT YELLOW 4051 DG3 (DIAMOND GRADE CUBED) BS EN 12899-2:2007


MATERIAL:
 VACUUM FORMED POLYPROPYLENE BLACK

Sign Reference	610
Height	450mm
Width	450mm
Area	0.16 m ²
Material	Class RA2 (12899-1:2007)
Mount Height	2300

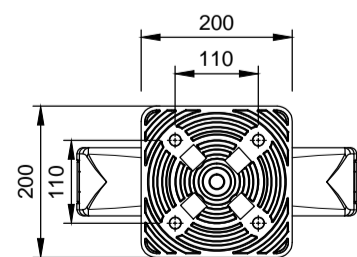

INSET A - SCALE 1:10

Sign Reference	612
Height	600mm
Width	600mm
Area	0.28 m ²
Material	Class RA2 (12899-1:2007)
Mount Height	2300

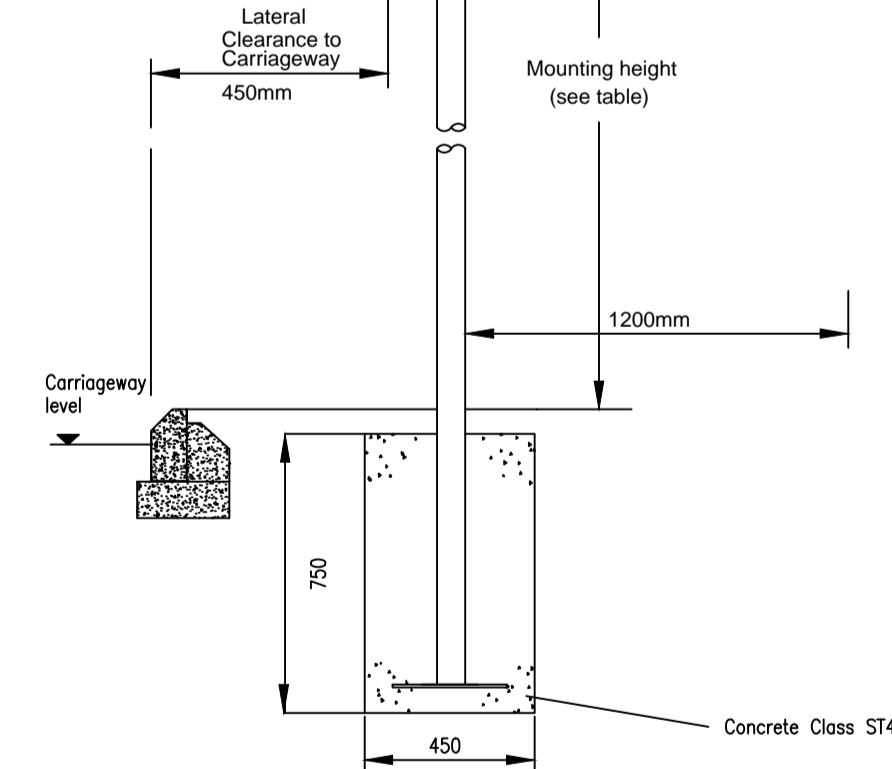

POSTS	
MOUNTING HEIGHT (m)	2.3
LATERAL CLEARANCE (m)	0.45
DIAMETER (mm)	80x40mm RHS
LENGTH (m)	3.7
FOUNDATION SIZE (mm)	450x450x750
ILLUMINATION	None

INSET B - SCALE 1:20

NOTES

- DO NOT SCALE FROM THIS DRAWING.
- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
- ALL LEVELS ARE IN METRES RELATIVE TO ORDNANCE DATUM NEWLYN UNLESS NOTED OTHERWISE.
- ALL MATERIALS AND WORKMANSHIP WILL BE AS SPECIFIED IN THE SPECIFICATION UNLESS NOTED OTHERWISE.
- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL DRAWINGS AND DOCUMENTATION ASSOCIATED WITH THE PROJECT.
- THIS DRAWING HAS BEEN BASED UPON SURVEY INFORMATION SUPPLIED BY GREENHATCH GROUP LTD. AND ROYAL HASKONING DHV SHALL NOT BE LIABLE FOR ANY INACCURACY OR DEFICIENCIES ARISING FROM IT.
- ALL LEVELS, DIMENSIONS AND LOCATIONS ARE TO BE CHECKED BY THE MAIN CONTRACTOR PRIOR TO COMMENCEMENT OF ANY WORK ON SITE.
- ALL HIGHWAY WORKS TO BE CARRIED OUT IN ACCORDANCE WITH THE HIGHWAYS AGENCY SPECIFICATION FOR HIGHWAY WORKS AND AS AMENDED IN THE CLAUSES AND APPENDICES IN THE "SPECIFICATION OF CONTRACT DOCUMENTS".

KEY

- PROPOSED ROAD ALIGNMENT
- BL PROPOSED KEEP LEFT BOLLARD - SEE INSET A FOR DETAILS
- RS PROPOSED ROAD SIGN - SEE INSET B FOR DETAILS

ROAD MARKING SCHEDULE

- ALL DIAG NUMBERS REFER TO THE TRAFFIC SIGNS AND REGULATIONS AND GENERAL DIRECTIONS 2002.
- ALL ROAD MARKINGS TO CONFORM WITH THE TRAFFIC SIGNS REGULATIONS AND GENERAL DIRECTIONS 2002.
- ALL BOLLARDS TO BE LOCATED AT LEAST 450mm FROM CARRIAGEWAY EDGE.

DIAGRAM DESCRIPTION	DIAG NO.	MARK (mm)	GAP (mm)	WIDTH (mm)
GIVE WAY	1003	600	300	200
CENTER LINE	1004	4000	2000	100
EDGE OF CARRIAGEWAY	1009	600	300	100
GIVE WAY TRIANGLE	1023	3750	-	1250
TURN LEFT	1036.1	VARIES	-	-

A	11.03.16	FIRST ISSUE	CH	PV	AC
REV	DATE	DESCRIPTION	BY	CHK	APP

REVISIONS

CLIENT

LAVER LEISURE

PROJECT
**MONEYSTONE PARK,
 WHISTON**

TITLE
**PROPOSED ROAD MARKINGS
 AND SIGNAGE**



DRAWN	CH	CHECKED	PV	APPROVED	AC
DATE	11.03.2016	SCALE AT AS SHOWN	CLIENTS REF.	-	-

DRAWING No.	PB5196 - 1200	REVISION	A
-------------	---------------	----------	---