

JI ECO
COMPOSITE ROOF PANEL

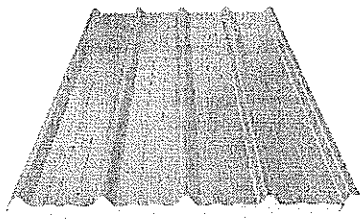

PRODUCT SPECIFICATION

APPLICATION

The JI Eco panel is a lightweight insulated panel. The aluminium foilliner at the inside makes it easy to handle and install. This roof panel is mostly applied for agricultural and functional buildings.

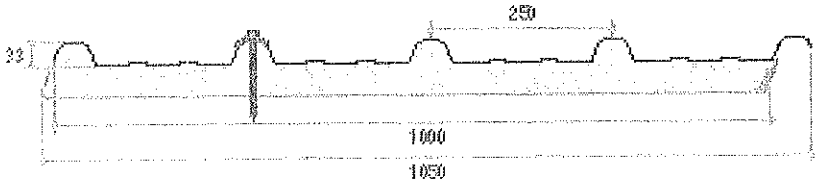

THERMAL CHARACTERISTICS

Core Thickness (mm)	20	30	40	60
U-Value (W/m².K)	1,07	0,71	0,55	0,35
Weight (kg/m²)	6,75	7,15	7,54	8,34

PRODUCT TOLERANCES [EN 14509]

Length (mm)	L < 3000 mm : -5 mm L> 3000 mm : -10 mm	L < 3000 mm : +5 mm L> 3000 mm : +10 mm
Width (mm)	-2 mm	+2 mm
Thickness (mm)	-2 mm	+2 mm

LENGTHS

The JI Eco panel is available from 2.500 mm until 13.600 mm. Other lengths are available upon demand.

CUTBACK

The cutback is standard 50 mm and can go up to 350 mm.

JORISIDE
MEMBER OF JORIS IDE GROUP