

Section

Elevation



Plan

TYPICAL WINDOW PLAN, ELEVATION AND SECTION

SCALE 1:20

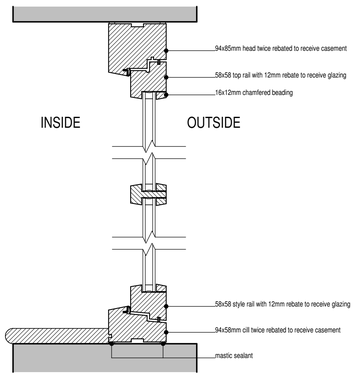

TYPICAL SECTION DETAIL

SCALE 1:5

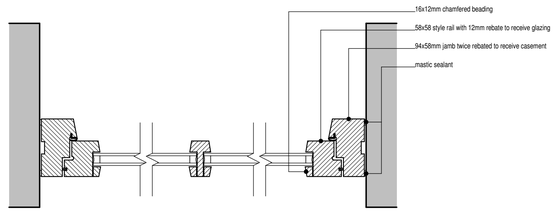

TYPICAL PLAN

SCALE 1:5

TYPICAL FLUSH FITTING CASEMENT
FULL OPENING CASEMENT

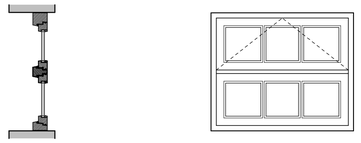

Section

Elevation



Plan

TYPICAL WINDOW PLAN, ELEVATION AND SECTION

SCALE 1:20

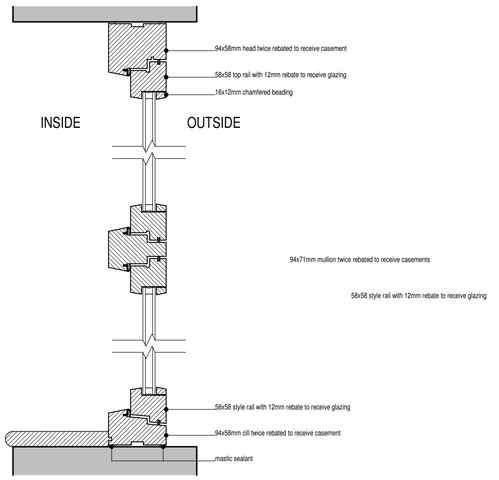

TYPICAL SECTION DETAIL

SCALE 1:5

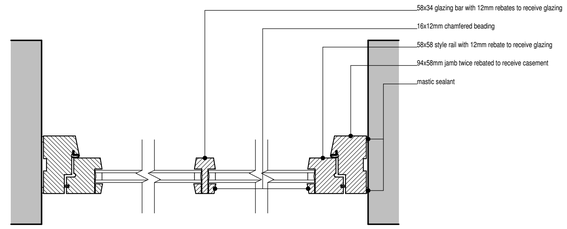

TYPICAL PLAN

SCALE 1:5

TYPICAL FLUSH FITTING CASEMENT
TOP OPENING CASEMENT

NOTES -
All sizes shall be measured on site by the manufacturer.
DO NOT SCALE from this drawing.
Check on site prior to commencement.

The timber windows are to have a Dulux, Heritage, Pea Colour finish

WINDOWS (max 'U' value 1.6W/m²K)
All double glazed to domestic rooms utilising low-E glass.
Manufacturer's certified 'U' values must be obtained and passed onto L.A. Building Inspector for approval.
Unless otherwise stated, ventilation openings shall exceed 1/20th floor area of the room served and be fitted with draught stripping.
Provide 10000mm² adjustable trickle vents to all habitable and bed rooms; 5000mm² adjustable trickle vents to kitchens, laundries and sanitary accommodation.
Silicone mastic sealant shall be applied internally and externally around all openings.



scale bar @ 1:5



scale bar @ 1:20

Mr D Riley

PROPOSED BARN CONVERSION TO HOLIDAY ACCOMMODATION, SHEPHERDS COTTAGE, CALTON, ST10 3LQ

PLANNING CONDITIONS
WINDOW DETAILS

Date	Sheet	Scale
JUNE 2017	A1	1:20, 1:5
Drg No.	Rev.	Drawn
2016-2182-09	-	NAW

SAMMONS Architectural LIMITED
Chartered Institute of Architectural Technologists Registered Practice
10 Cawdry Buildings, Fountain Street, Leek. ST13 6JP
Telephone: 01538 386002
E-mail: info@sammonsltd.co.uk
Web: www.sammonsltd.co.uk

This drawing is copyright. Do not scale.
All dimensions must be checked prior to commencement.