





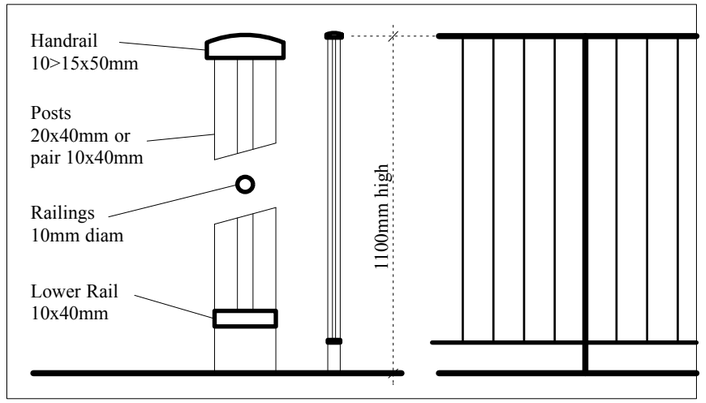

New Garden Fence above falls > 600mm
(As Type 1-R as used in Historic Gardens made by Oliver Lloyd, oliver@secure-a-field .co.uk)
Some sections may need to follow ground

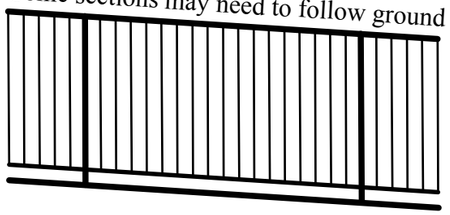

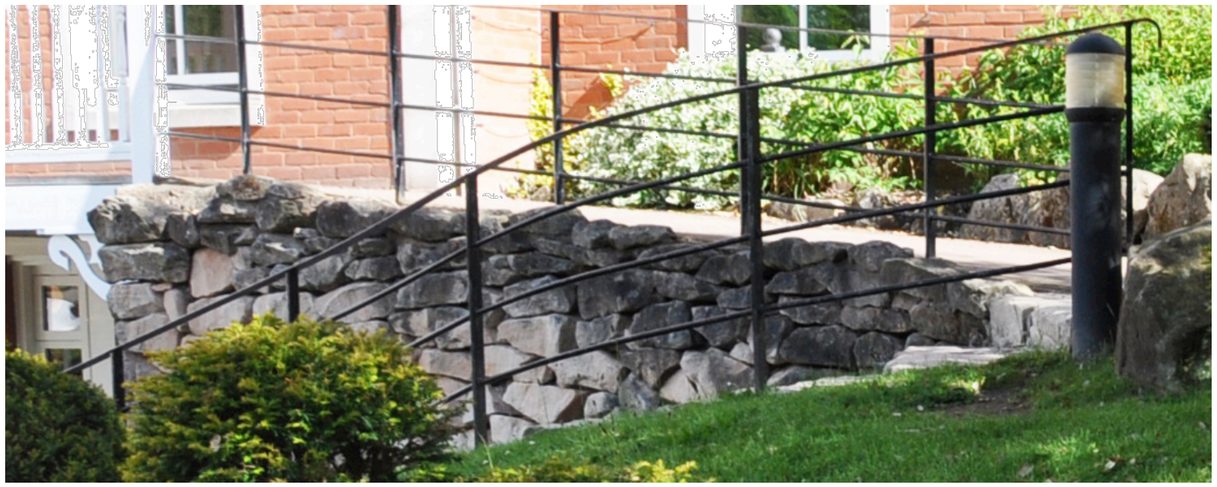

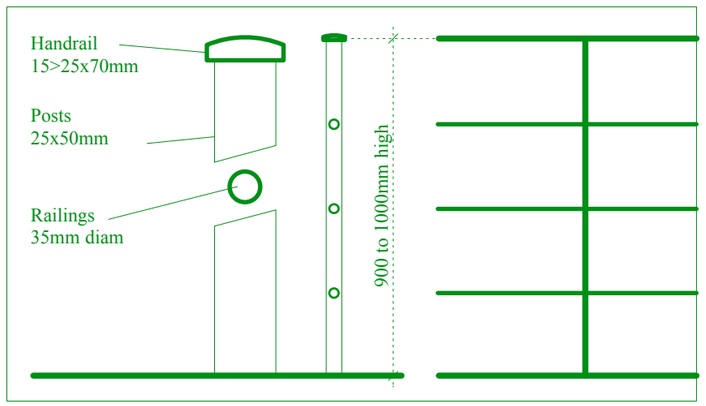



New Handrails to Steps and Lake Edge
(As Existing used in Hotel Garden)



New Fence around Service Yard
(As existing compound fence used in Hotel Garden, with fair face to garden)

New Fence around Spa
To match existing fence around Spa BoH but limited in height to level 59.9m (1.5m to 1.7m above adjacent varying paving level)

New 1800mm Chain link fence
(As existing green chain link on adjacent sites)

New 1100mm Chain link fence
(To match above)



New Knee Rail for Plant Protection
Cleft half round Chestnut intermediate posts 1.2m long with 1 twin mortice. Full round Chestnut end and corner posts to suit. Cleft and scarfed Chestnut rails 2.0m long. Bark left on. Fence height approximately 0.6m with post centres at 1.8m. As http://www.secure-a-field .co.uk/chestnut-knee-rail .html or similar.

Rev C 20.1.16 Notes & sketches added
Rev B 1.12.15 Notes added
Rev A 14.9.15 Knee rail added

NICHOLS BROWN WEBBER LLP
ARCHITECTS AND LANDSCAPE PLANNERS
POND HOUSE, NORTHEND, HENLEY-ON-THAMES, OXON RG9 6LG
TEL: +44 (0)1491 638 536 EMAIL: enquiries@nbwarchitects .co.uk

PROJECT
Alton Towers Resort/ Hotel Extension

DRAWING TITLE
Siteworks: Fences & Handrails

PLOT DATE	CHECKED
8.7.15	
SCALE **1/20@ A3**	STATUS **S**
PROJECT NO **373/50.3**	DRAWING NO **12**
	REVISION **C**