Cylindrical

C series attenuators

A full range of noise efficient, circular attenuators matched to metric axial fan sizes, fully packaged and ready to install.

C series comprise;

- Metric fan mountable
- 24 standard models
- 2 mounting hole patterns
- 250mm to 1000mm diameters
- 1 and 2 x diameter lengths
- Special versions on request
- Imperial range also available

DIMENSIONS

Cylindrical attenuator

MOUNTING HOLE PATTERNS

2 ALTERNATIVE HOLE PATTERNS ARE AVAILABLE AS STANDARD.

SPECIFY **A** OR **B**

HOLE PATTERN A

D QUANTITY OF **E** THREADED INSERTS ON **F** P.C.D

HOLE PATTERN B

G QUANTITY OF **H** THREADED INSERTS ON **I** P.C.D

NB ALTERNATIVE HOLE PATTERNS, ARE AVAILABLE ON REQUEST

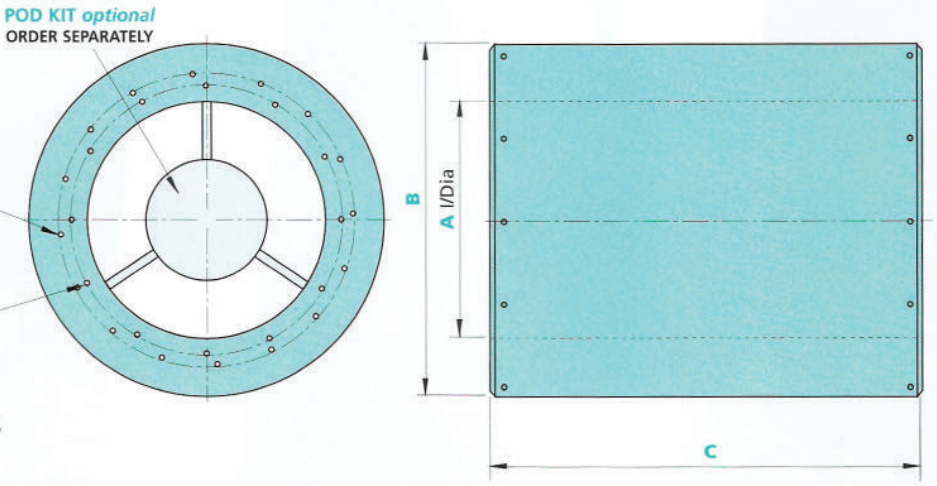

NOM FAN SIZE Ømm	C SERIES ORDER CODES		DIMENSIONS									WEIGHT	
	C SERIES EXCLUDING POD	POD KIT ONLY	A	B	C	D	E	F	G	H	I	EXCL POD KIT	POD KIT
250	1100-C*1-0250	1105-PK1-0250	250	411	250	8	M6	286	6	M6	286	7	2
250	1100-C*2-0250	1105-PK2-0250	250	411	500	8	M6	286	6	M6	286	11	2
315	1100-C*1-0315	1105-PK1-0315	315	452	315	8	M8	355	8	M8	355	9	2
315	1100-C*2-0315	1105-PK2-0315	315	452	630	8	M8	355	8	M8	355	15	2
355	1100-C*1-0355	1105-PK1-0355	355	509	355	8	M8	395	8	M8	395	11	2
355	1100-C*2-0355	1105-PK2-0355	355	509	710	8	M8	395	8	M8	395	18	3
400	1100-C*1-0400	1105-PK1-0400	400	553	400	8	M10	450	12	M8	438	13	3
400	1100-C*2-0400	1105-PK2-0400	400	553	800	8	M10	450	12	M8	438	22	4
450	1100-C*1-0450	1105-PK1-0450	450	602	450	8	M10	500	12	M8	487	15	3
450	1100-C*2-0450	1105-PK2-0450	450	602	900	8	M10	500	12	M8	487	27	4
500	1100-C*1-0500	1105-PK1-0500	500	653	500	12	M10	560	12	M8	541	18	4
500	1100-C*2-0500	1105-PK2-0500	500	653	1000	12	M10	560	12	M8	541	32	5
560	1100-C*1-0560	1105-PK1-0560	560	713	560	12	M10	620	16	M10	605	22	4
560	1100-C*2-0560	1105-PK2-0560	560	713	1120	12	M10	620	16	M10	605	39	7
630	1100-C*1-0630	1105-PK1-0630	630	785	630	12	M10	690	16	M10	674	26	6
630	1100-C*2-0630	1105-PK2-0630	630	785	1260	12	M10	690	16	M10	674	48	9
710	1100-C*1-0710	1105-PK1-0710	710	864	710	16	M10	770	16	M10	751	32	7
710	1100-C*2-0710	1105-PK2-0710	710	864	1420	16	M10	770	16	M10	751	59	12
800	1100-C*1-0800	1105-PK1-0800	800	955	800	16	M10	860	24	M10	837	40	9
800	1100-C*2-0800	1105-PK2-0800	800	955	1600	16	M10	860	24	M10	837	74	16
900	1100-C*1-0900	1105-PK1-0900	900	1106	900	16	M12	970	24	M10	934	55	12
900	1100-C*2-0900	1105-PK2-0900	900	1106	1800	16	M12	970	24	M10	934	102	21
1000	1100-C*1-1000	1105-PK1-1000	1000	1207	1000	16	M12	1070	24	M10	1043	66	16
1000	1100-C*2-1000	1105-PK2-1000	1000	1207	2000	16	M12	1070	24	M10	1043	124	27

* Specify A or B to suit mounting hole pattern required – refer to drawing above