


existing Staffordshire Blue Plain clay tiles and hog back ridge tiles, to be retained existing treated timber battens and Type 1F roofing felt to be retained	
proprietary in-line plain high-level tile vents @ 1500mm centres (Marley Eternit Clay in-line vent 01283 722588)	
new Celotex FR5000 75mm thick rigid insulation board lightly fixed between rafters, thickness to suit existing rafter depth	
new Code 6 lead back gutter and side abutment flashing	
65mm thick Celotex PL4065 insulated plasterboard and 2mm plaster skim to underdraw existing rafters	
new conservation rooflight, refL CR9 (The Rooflight Company tel: 01993 833 108) installed in accordance with manufacturers details and specification	
new Code 6 lead apron flashing	
existing timber roof purlin to be retained	existing timber purlins
s/s fix treated timber battens to inside faces of existing rafters to maintain min 20mm air space	
SIII I	typical root

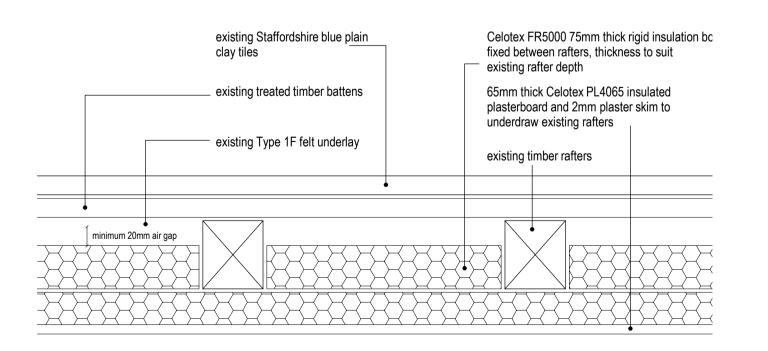

DETAIL 2 typical roof detail 1:5

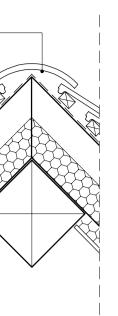


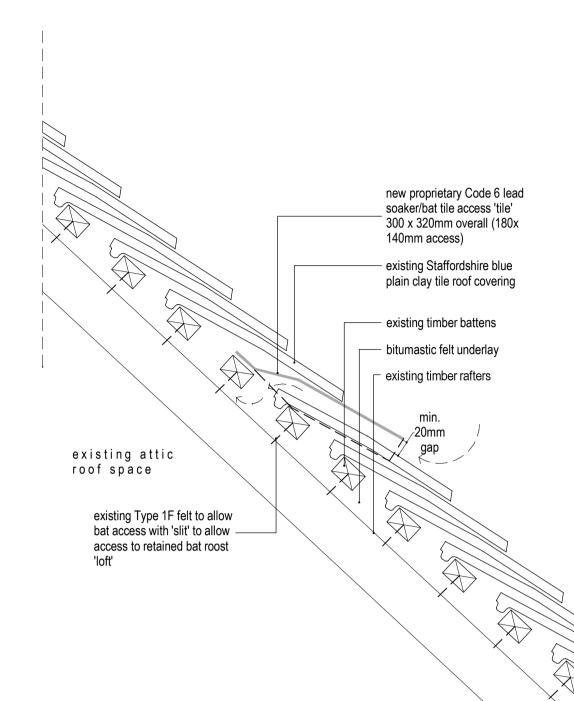



DETAIL 1 oflight detail 1:10 DETAIL 3 bat access tile detail to retained bat roost/attic 1:5

SP

=

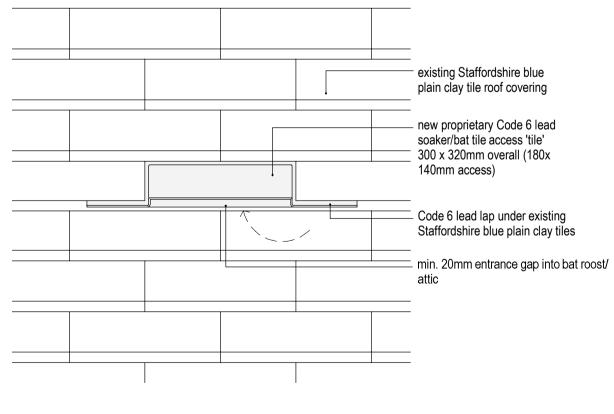



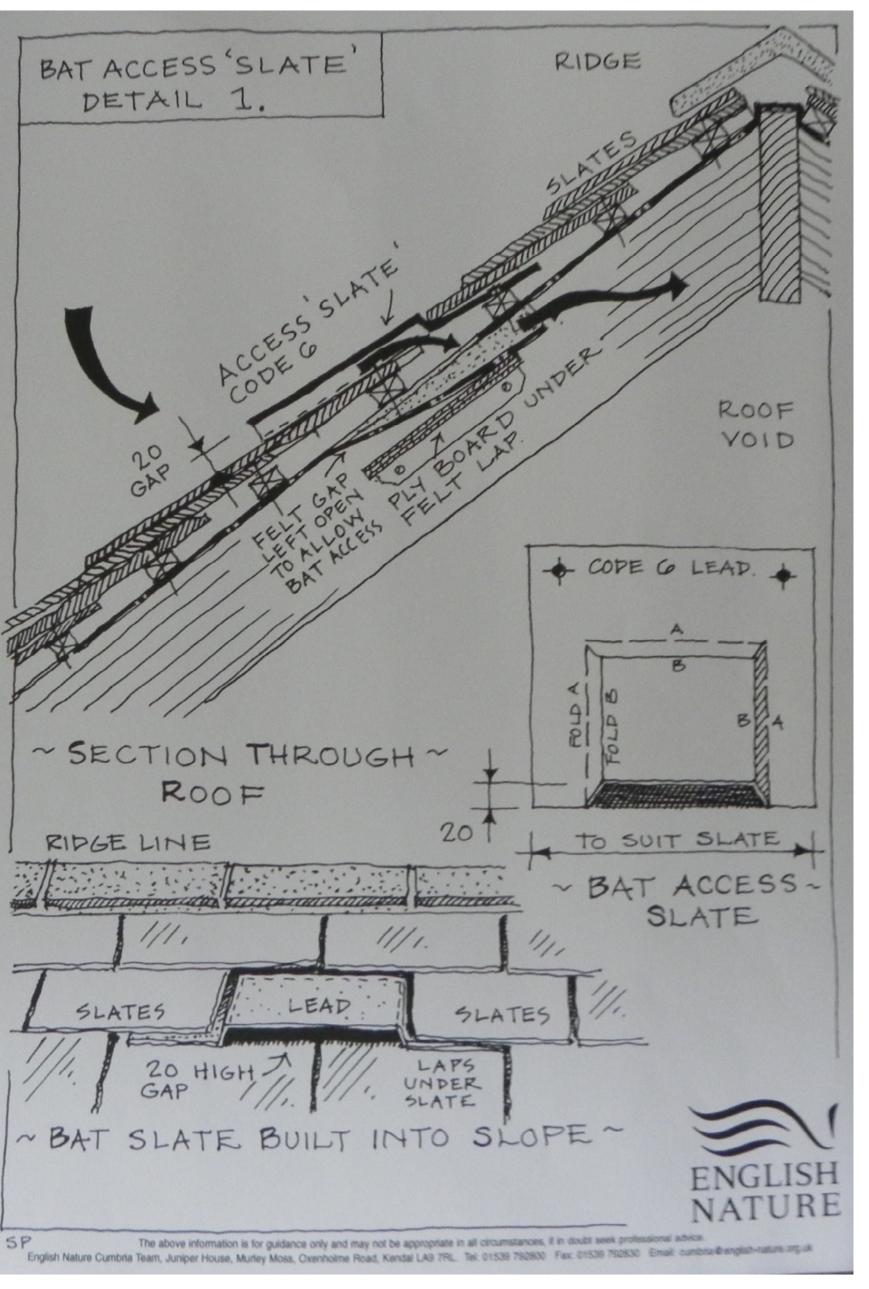

English Nature Indicative Guidance

