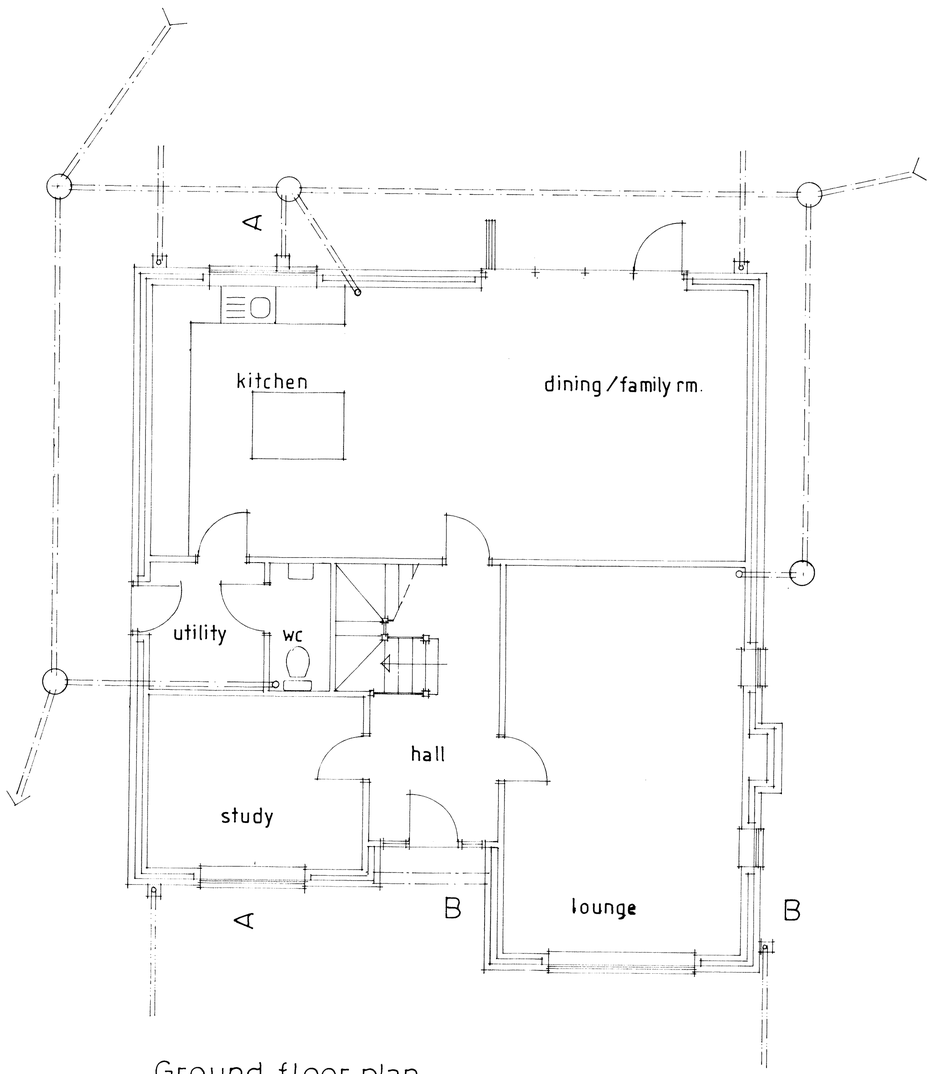

Ground floor plan.

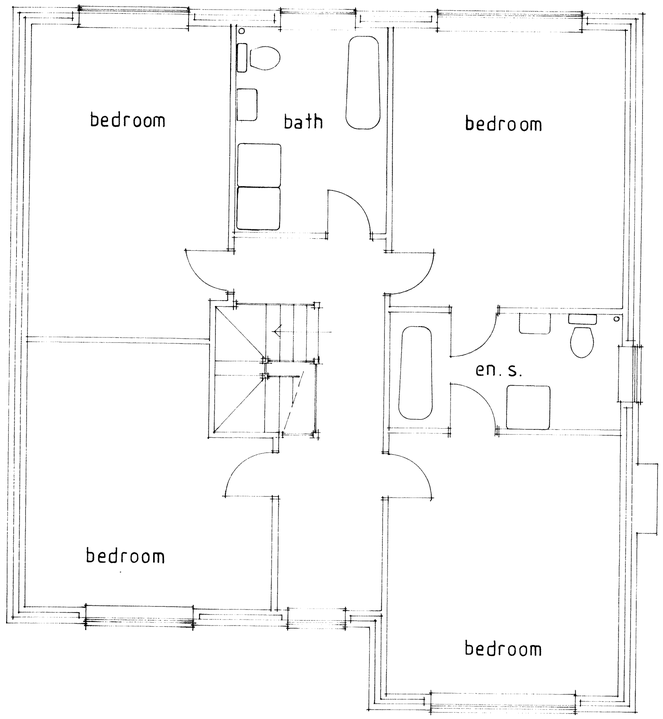

First floor plan.

NOTES

External cavity walls and gables to dwellings to be constructed of outer skin of facing bricks to Planning Officer's approval. Quoins to be built as shown in reconstructed stone units. Build chimney stacks in brickwork with facing bricks where exposed. Chimneys to be finished with clay chimney pot set and flaunched in cement mortar. Form tiled shoulder with code 4 lead flashings at abutments with brickwork. Build in gas and electric meter boxes in external skin of hollow walls. Build in 'Catnic' lintels CG90 100 over external door and window openings.

Pitched roofs to be of plain tiles to Planning Officer's approval on 38 x 19 sawn battens, to 100mm gauge. Provide and fix code 4 lead flashings with soakers to chimneys and at intersections of roofs with walls. Provide and fix code 4 lead slate with sleeve where vent pipe passes through roofing. Dormers roof gable to be constructed of plain tiles on 38 x 19 sawn battens, to 112mm gauge. Fit UPVC fascias, barge boards and soffits with boxed ends at intersection of fascias and barge boards. Provide and fix 80 x 80 x 4mm Square Hollow Section structural column to support front door canopy roof. Gutters and rainwater pipes to be in UPVC. Gutters to be 'Hepdrain' 112mm half round gutters laid to 1 in 600 falls, with 68mm diameter rainwater pipes discharging into trapped gullies.

Windows to be UPVC double-glazed with glass 16mm apart with Pilkington 'K' Low E coating of 0.15 rating, and draught proofed. External doors and frames are to be UPVC minimum 775mm clear width. Glazing to external doors to double glazed in 4mm toughened glass units. Build in 125 x 150mm sunk, splayed and throated reconstructed stone cills with stooled ends to windows, 100 x 225mm reconstructed stone heads to windows and doors.

Any external lighting is to automatically extinguish when there is enough daylight, and when not required at night

Paint or stain all new external woodwork on completion. Paint all new exposed metalwork on completion.

Site to be left clean and tidy on completion and any damage to adjoining areas to be made good. All works to be carried out in strict accordance with all relevant BS Codes of Practice, good building practice and all relevant Health & Safety Legislation. All dimensions and levels to be checked on site.

Amendments:

A 15-01-16 Sanitary fittings shown. Drainage shown.

MR. C. HEATON

DATE **July 16**

PROPOSED DWELLING TYPE C (PLOT 6)
AT
HOME FARM, HIGH STREET,
DILHORNE,
STOKE-ON-TRENT,
STAFFS. ST10 2PE

SCALE:
PLANS 1:50

DRAWN BY:
MALCOLM SALES
QUANTITY SURVEYORS, DESIGNERS & BUILDING COST CONSULTANTS
CHURCHILL SUITE,
LULWORTH HOUSE,
51, HIGH STREET,
CHEADLE, STOKE-ON-TRENT,
STAFFS. ST10 1AR
TEL: 01538 757233
MOB: 07889 225437
E-MAIL: Malcolm.Sales@salesqs.co.uk

AS PROPOSED

FOR PLANNING APPLICATION

DRAWING NR. 1511 11 10 A