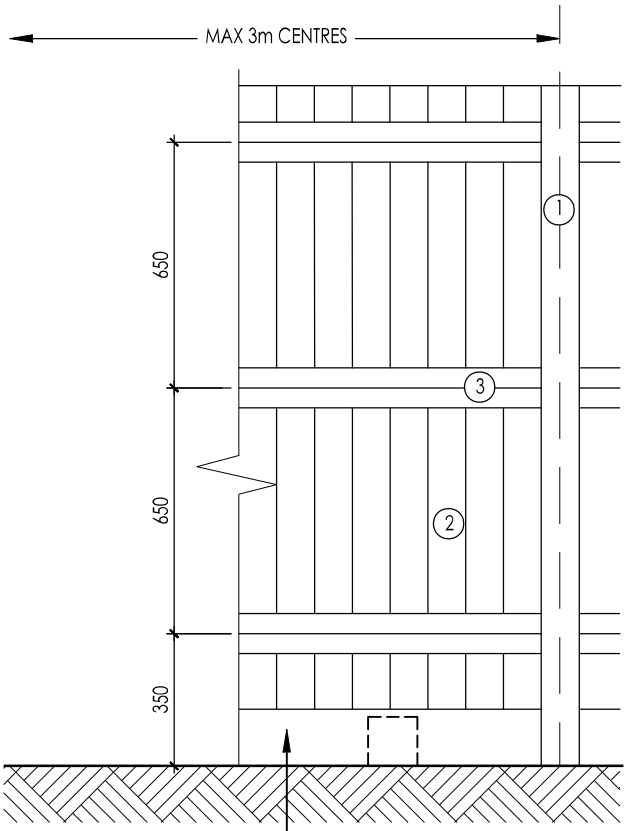

ELEVATION

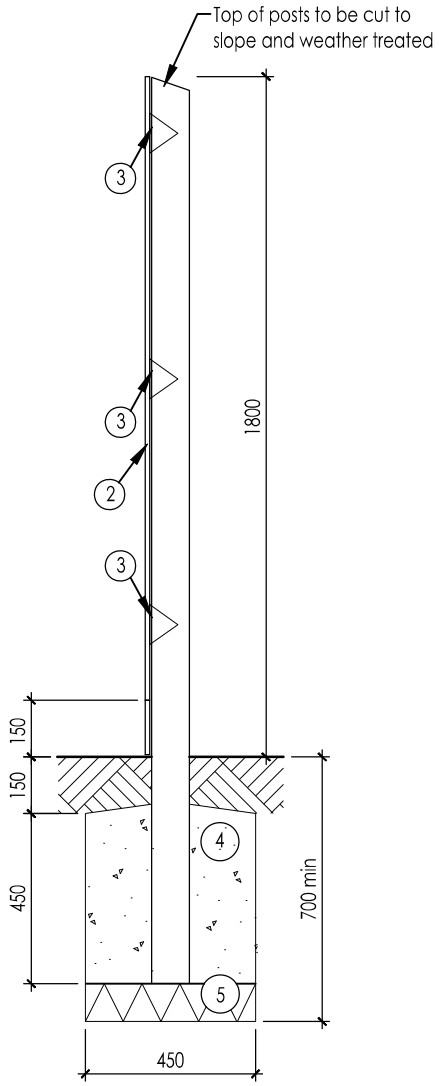

STANDARD SECTION

1. 100x100mm s/w posts with chamfered tops at 3m centres (max).

2. 125x12 mm tapered to 6mm s/w boarding. 50mm galvanised nail fixing.

3. 75x105mm triangular arris rails fixed to posts with 125mm galvanised nails.

4. 450x450x450mm concrete surround to post. Concrete mix C7.5

5. 100mm concrete bed.

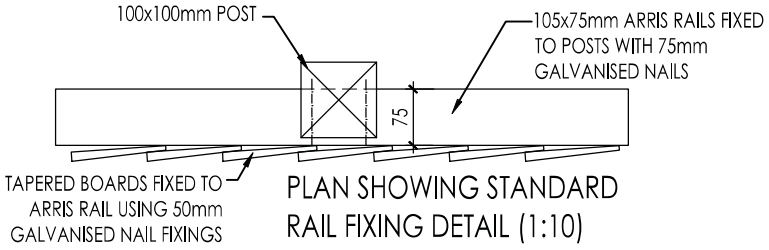

PLAN SHOWING STANDARD RAIL FIXING DETAIL (1:10)

NOTE:-
All timbers shall be pressure impregnated with preservative as specified. Finish to be mid brown. All cut ends to be preservative treated prior to fixing.

Timber quality shall be as noted in BS 1722. pt 5 Appendix N.

B: POST CENTRES AMENDED TO 3M MAX
A: PROVISION FOR HEDGEHOG HIGHWAYS ADDED

ST.MODWEN HOMES

Title	CLOSE BOARDED FENCING, 1.8m HIGH, STANDARD EFFECT						
ADN	-	RSD	-	Scale at A4	1:10, 1:20	Revision B	Reference SD0607
Notes	2018 SERIES DETAILS					Published	29/07/2017