

CAR PARK
The car park to have a TarmacDry pourous asphalt finish min 120mm thick on min 200mn thick TarmacDry granular reservoir layer on TarmacDry filtration geotexile.
All on a subgrade base with min CBR of 5% base as required to suit site conditions.
All to be installed fully in accordance with Tarmac's details and specifications.
Standard pre cast concrete edging kerbs to be provided and also install in accordance with manufacturers instructions and details

CAR PARK SPACES
The car park spaces to be marked out in white thermoplastic paint. Min size of spaces to be 2.4m wide and 4.8m long

FORMER ENTRANCE
The former second entrance to the car park shall be closed off and re grassed over to match the adjacent area



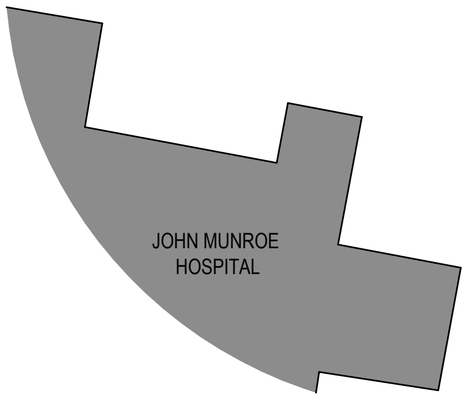



scale bar @ 1:200

JOHN MUNROE HOSPITAL GROUP LTD

PROPOSED CAR PARK AT
JOHN MUNROE INDEPENDENT HOSPITAL,
HORTON ROAD,
RUDYARD,
NR.LEEK,
ST13 8RU.

PLANNING SCHEME

Date	Sheet	Scale
OCT 2009	A2	1:200
Drg No.	Rev.	Drawn
2009-1687-02	-	ASR
Rev.		

SAMMONS Architectural LIMITED
Chartered Institute of Architectural Technologists
10 Cawdry Buildings, Fountain Street, Leek. ST13 6JP
Telephone + Fax 01538 386002
E-mail: info@sammonsltd.co.uk

This drawing is copyright. Do not scale.
All dimensions must be checked prior to commencement.