


DATA SHEET

ruck.eu
VENTILATOREN

EM 315 E2M 01 | 130677

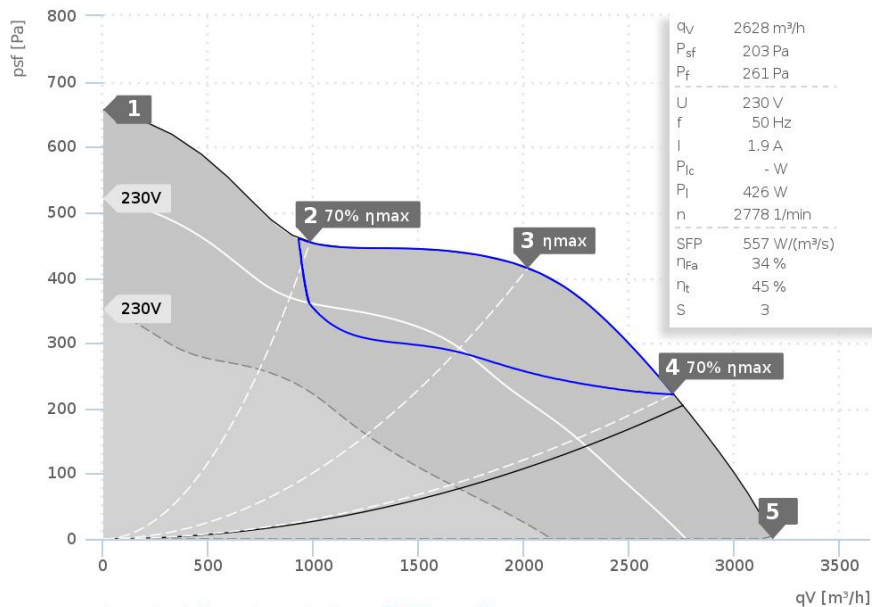

- Diagonal impeller with stator
- With Plastic housing
- 3-step
- Integrated thermostatic switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	1,6	1,5	1,9	1,9	1,8
Power consumption P _l	W	344	322	421	428	382
RPM n	1/min	2838	2852	2778	2775	2813
SPL inlet L _{WA5}	dB(A)	83	81	82	80	81
SPL outlet L _{WA6}	dB(A)	87	85	84	83	85
SPL casing break out L _{WA2}	dB(A)	69	69	68	66	67

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	80	34	50	67	74	74	73	73	65
Outlet	L _{WA6}	83	35	50	69	78	78	76	74	66
Casing	L _{WA2}	66	34	36	62	58	63	54	49	40

EM 315 E2M 01 130677	
Voltage U _N	230 V 1~
Current I _{max}	2,1 A
Ambient Temperature t _A	55 °C
Medium temperatures t _M	55 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	12,4 kg

