



Features

Maximum sash size

Side hung: 620mm (w) x 1270mm (h)

Outer frames

56mm, 72mm and 84mm outer frames

Mullions

70mm or 95mm mullions

Sash

61mm flush sash

Finishes

Available in a large assortment of colours and woodgrain options from the Variations range and SPECTRAL*

Glazing beads

28mm bevelled
28mm sculptured
32mm bevelled
36mm bevelled

Ancillaries

Frame extensions, cills and weathering trims
Range of coupling options
Range of bay pole options


Thermal performance**

Achieves U-values as low as 1.3 W/m²K using double glazing
Achieves U-values as low as 1.1 W/m²K using triple glazing

* SPECTRAL is only available on bevelled or flat surfaces.

** Figures can vary dependent on specification.

Technical Drawing

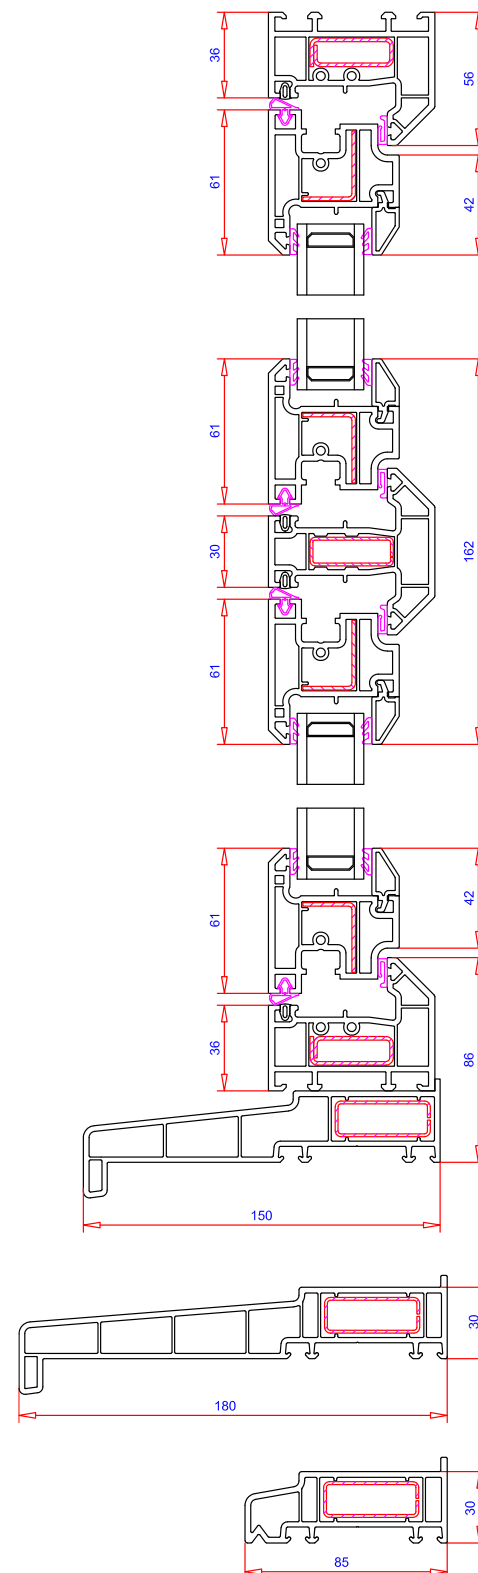

System 10 FlushSash Casement Window



Test Results

Window type	Max sash sizes (wxh)	Air permeability	Water tightness	Resistance to wind	Exposure category
Side hung reinforced	620mm x 1270mm	Class 4	Class 9A	A4	1600