


Group No	Species	Height	Stem Dia.	Crown Radius	Age Class	Overall Condition	Structural Condition	RPA	RPA Radius	BS5837 Cat
G6	Beech Fagus sylvatica	16	upto 1200	12	M	G	Barbed wire attached to stem/s Branch stubs and broken branches evident resulting from wind loaded damage Browsing damage noted on main stem Characteristic for species Interlocking crowns Minor dead wood evident in the crown (<75mm)	651	14.4	A (ii)
G7	1 Beech Fagus sylvatica 1 English Oak Quercus robur	4	upto 70	1	Yng	F	Flail damage evident	2	0.8	C (ii)

Hedge No	Species	Height	Stem Dia.	Crown Radius	Age Class	Overall Condition	Structural Condition	RPA	RPA Radius	BS5837 Cat
HEDGEROWS										
H1	Hawthorn Crataegus monogyna Holly Ilex aquifolium	1.5	upto 150	0.5	M	G	Maintained hedgerow Consolidated compact form	10	1.8	B (ii)
H2	Elder Sambucus nigra Hawthorn Crataegus monogyna	7	upto 350	3	M	G	Old laid forms visible within structure Outgrown hedgerow Note water filled ditch to west side A small section has been 'topped' to reduce the height of the growth below the pylons Well established forms	55	4.2	B (ii)
H3	Hawthorn Crataegus monogyna	1.5	200 150 100	0.5	M	G	Maintained hedgerow Consolidated compact form	33	3.2	B (ii)
H4	Hawthorn Crataegus monogyna Holly Ilex aquifolium	1.5	upto 380	0.5	M	G	Maintained hedgerow Consolidated compact form	65	4.6	B (ii)
H5	Hawthorn Crataegus monogyna Holly Ilex aquifolium	1.5	upto 180 100 150	0.5	M	G	Maintained hedgerow Consolidated compact form Old laid forms visible within structure Holly present only at westernmost end	29	3.1	B (ii)
H6	Elder Sambucus nigra Hawthorn Crataegus monogyna	1.5	upto 350	0.5	M	G	Maintained hedgerow Consolidated compact form Old laid forms visible within structure	55	4.2	B (ii)
H7	Hawthorn Crataegus monogyna	1.5	upto 180	0.5	M	G	Maintained hedgerow Consolidated compact form Old laid forms visible within structure	15	2.2	B (ii)

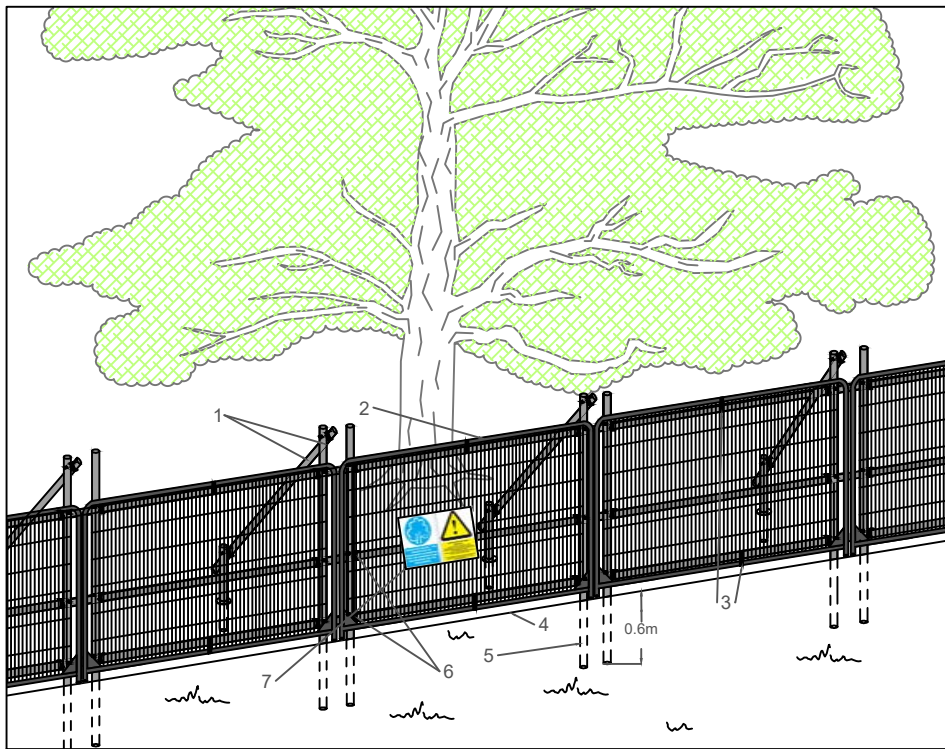

Standard specification for protective barrier

1. Standard scaffold poles
2. Heavy gauge 2m tall galvanized tube and welded mesh infill panels
3. Panels secured to scaffold frame with wire ties
4. Ground level
5. Uprights driven into the ground until secure (min depth of 0.6m)
6. Standard scaffold clamps
7. Construction Exclusion Zone signs



Above ground stabilising systems

1. Stabiliser strut with base plate secured with ground pins
2. Feet blocks secured with ground pins
3. Construction Exclusion Zone signs

NOTES

This drawing is the property of FPCR Environment and Design Ltd and is issued on the condition it is not reproduced, retained or disclosed to any unauthorised person, either wholly or in part with written consent of FPCR Environment and Design Ltd.



masterplanning ■
 environmental assessment ■
 landscape design ■
 urban design ■ FPCR Environment and Design Ltd
 ecology ■ Lockington Hall
 architecture ■ Lockington
 arboriculture ■ Derby DE74 2RH

t: 01509 672772
 f: 01509 674565
 e: mail@fpcr.co.uk
 w: www.fpcr.co.uk

drawing title

APPENDIX B PROTECTIVE FENCING SPECIFICATIONS

CAD file: S:\Arb resources\Basic Templates\Tree Protection\Appendix B - Protective Fencing A4.dwg