

Security Direct
property protection

Large Product Range ✓
Competitive Prices ✓
25 years Experience ✓

Continental Commercial Roller Shutter

SECURITY DIRECT
www.securitydirectuk.com

Continental Commercial - RSA75







Key Benefits

- Offices, Shop Fronts, Serveries and Car Parks
- Compact Aluminium Box and Guides - Steel Curtain
- Medium to High Security
- Solid Laths as standard
- Optional:- Perforated Laths - 18% Vision, Punched Laths - 25% Vision
- Up to 5800mm wide openings
- Single Phase Tube Motor
- Powder Coated White, Brown, Black or Cream as standard
- 2-3 week lead time (Subject to change)

Continental Commercial - RSA75

Product Overview

Description
The RSA75 Continental Roller is the most popular shutter for Offices and Shops. The continental shutter uses the Galvanised Steel curtain, but uses Aluminium Box and Guides. The Aluminium Box and Guides are more compact and neater option, compared to steel boxes and guides. The laths are also available Solid, Perforated (18% Vision) and Punched (25% Vision).

Common use
Offices, Shop Fronts, Serveries

Maximum Width
5800mm

Maximum Height
3400mm


Weight
12kgs m/2


Standard Finish
Powder Coated White, Brown, Black or Cream as standard. Other BS or RAL colours are available at an extra cost.


Lead Time
10-15 working days (subject to change)

Specification

CURTAIN SLAT
Single skin 76mm (3") curved steel slat. Wall thickness 0.7mm or 0.9mm depending on overall shutter opening width. Solid laths are standard with the option of Perforated (18% Vision) and Punched (25% Vision) at an additional cost.

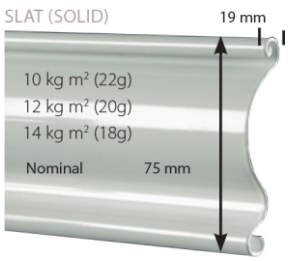

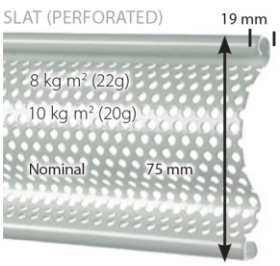

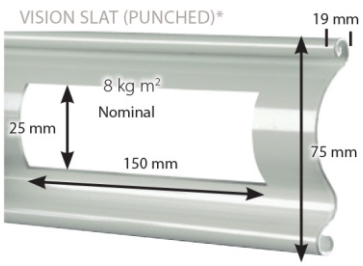


Punched Curtain
150 mm x 25 mm regular punched hole with 50 mm space between. Available as brick bond or in line configuration. Provides 25% vision. Not available in a galvanised finish, must be powder coated. Price does not include powder coating. (Priced on clear opening sizes).

*Please note: Punched products must be powder coated

Continental Commercial - RSA75

Specification


SHUTTER BOX
Galvanised steel end plates, with a a full Aluminium hood/fascia as standard. Powder Coated White Brown, Black or Cream as standard. Other VS or RAL colours are available at an additional cost.

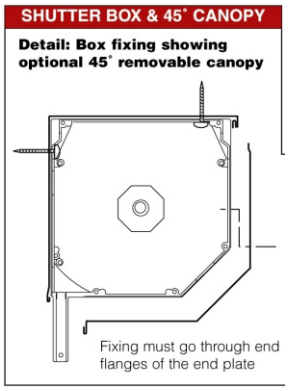


Guide Height (mm) - Plate Size (mm) - (Internal/External Fit)
1399 - 250/250
1999 - 250/300
2599 - 300/300
2999 - 300/350
3400 - 350/400

* Endplate sizes shown as a guide only and may increase dependent on shutter width.

BOTTOM RAIL
Galvanised steel 'T' shaped bottom rail is provided as standard. The option of an "L" is available when face fixing or need to miss a door handle on one side of the opening. Both the "T" rail and "L" Rail are available with a Rubber Bottom Seal and Safety Edge at an additional cost.



"L" section
Safety edge only available on "L" section




"T" section
"D" rubber seal only available on "T" section

Continental Commercial - RSA75

Specification

GUIDE CHANNELS

Extruded Aluminium Laths, with brush seals. For reveal fixing and larger openings, a 30mm x 30mm box section will be used on the back of the guide, to accommodate the larger motors. Powder Coated White, Brown, Black or Cream as standard. Other BS or RAL colours are available at an extra cost.

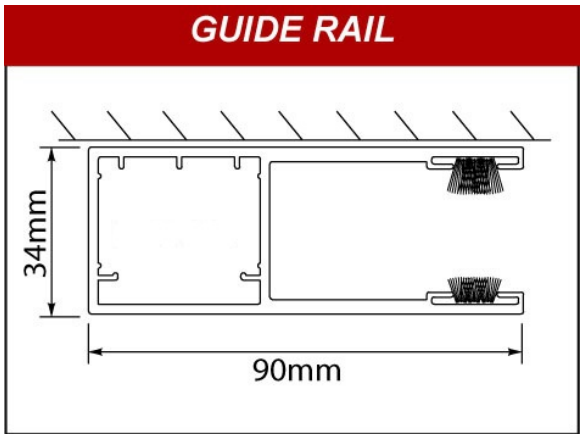

OPERATION

The RSA75 Continental Commercial Roller Shutters are available Manually operated (Spring & Lock), ideal for small openings. As standard the shutter is locked into the down position with Two Point Bottom Lath Lock. Bullet Locks are available at an additional cost.

For larger openings the Continental shutters are electrically operated using a Single Phase tube motor. The tube motors are neat as they are built into the roller shutter barrel and ideal for light usage ie; 3-4 operations per day. The tube motors come with a 5 years manufacturers part warranty. The tube motors are available with a Manual Override which allows the shutters to be operated in the event of a power failure.

The electric roller shutters come as standard with a Toggle Switch for internal, non secure operation. There is the option of External Key Switch, Keypads, Remote Control operation, Smart Phone operation and High Security Tag System.

Continental Commercial - RSA75

Specification


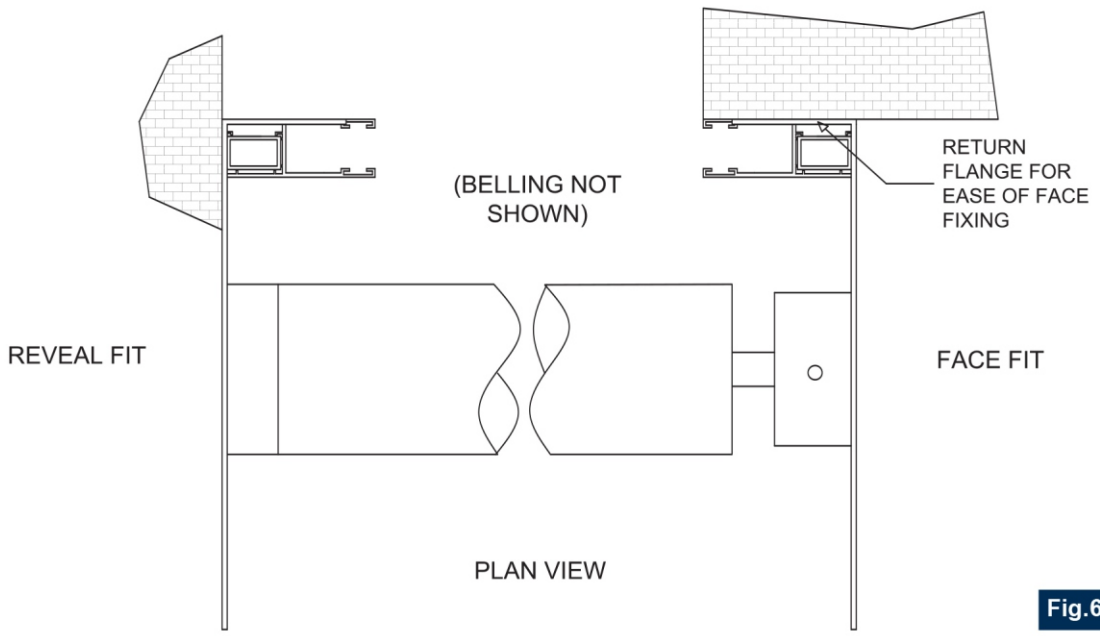


Fig.6

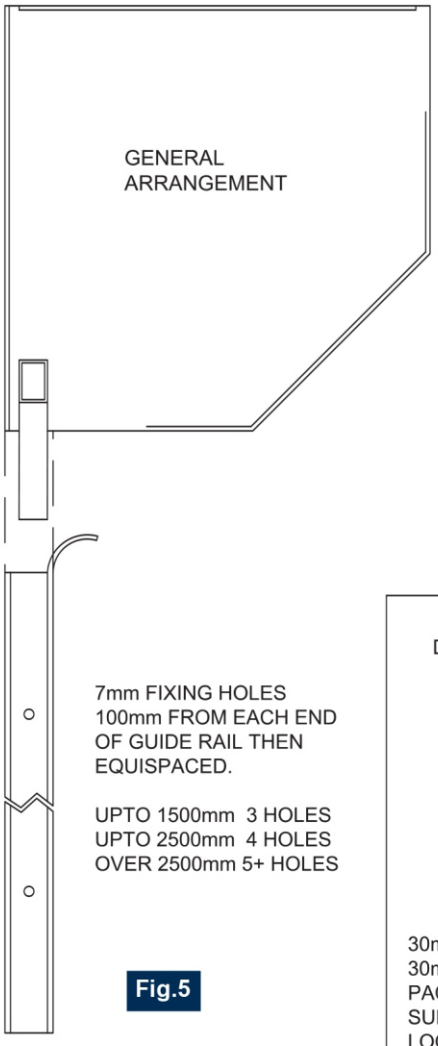

7mm FIXING HOLES
100mm FROM EACH END OF GUIDE RAIL THEN EQUISPACED.

UPTO 1500mm 3 HOLES
UPTO 2500mm 4 HOLES
OVER 2500mm 5+ HOLES

Fig.5

DETAIL OF MOTOR SIDE ON FACE FIT SHUTTERS USING A MOTOR ABOVE 120Nm

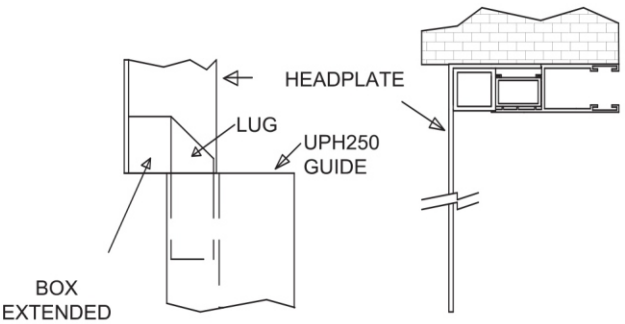


Fig.8

DETAIL OF MOTOR SIDE ON REVEAL FIT SHUTTERS USING A MOTOR ABOVE 120Nm


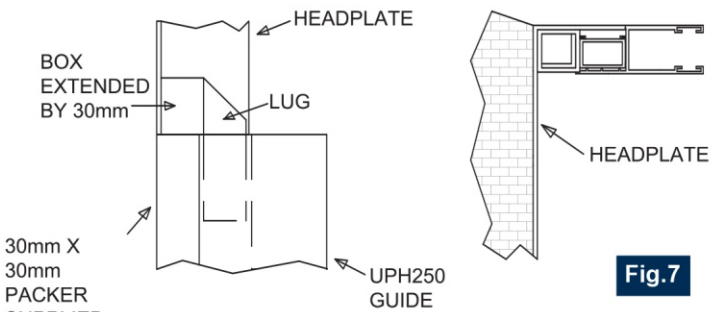


Fig.7

Continental Commercial - RSA75

Colours

STANDARD COLOURS – FOC



BAND A –

For complete shutter (or curtain) using a colour listed in the band below.



BAND B –



BAND C –

