


Performance Chart

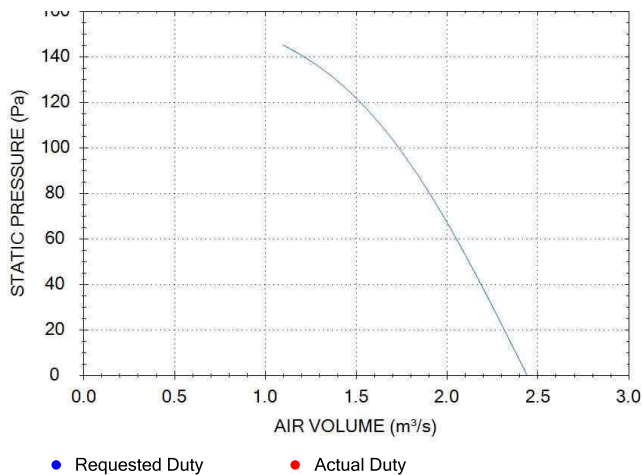

VSC50014

Stock Reference:	VSC50014
Product Type:	Ventilation
Product Range:	Plate & Case Fans
Impeller:	Sickle
Casing:	Black epoxy coated rolled sheet steel
Speed:	1230 rpm
Airstream Temperature:	-40°C to 70°C
dBA:	52
Specific Fan Power & dB(A) shown are at duty point.	

Warranty: 2 years

Electrical Information

Watts	780
Supply Voltage:	220-240V/1/50Hz
Full Load Current:	3.4 A
Starting Current:	7.1 A
Starting Method:	D.O.L.
Motor Poles:	4
Insulation:	F
Motor IP Rating:	IP54
Speed Controllable:	Yes

Acoustic Information


	63	125	250	500	1k	2k	4k	8k	Total	dBA@3m
Inlet	71	75	67	63	67	68	60	52	78	52
Outlet	71	75	67	63	67	68	60	52	78	52
Breakout	-	-	-	-	-	-	-	-	-	-

Sound Power Level Spectra dB (re 10^{-12} Watts)

For ducted units, sound power is given as In Duct with end reflections added.

Stated dB(A) levels at 3m with spherical propagation at a reference level of 2×10^{-12} Pa

Dimensions

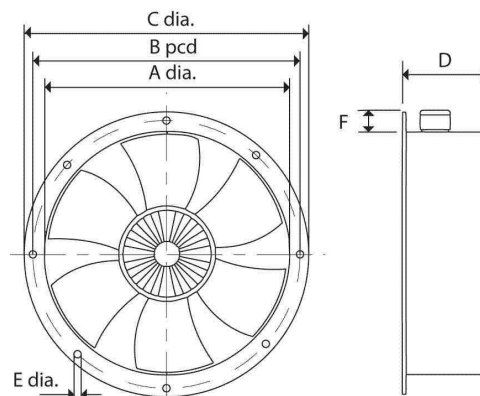

AØ	BØ	CØ	D	EØ	F	n
503	541	567	166	9.5	65	12

-	Dimensions shown in mm
-	Weights in kg