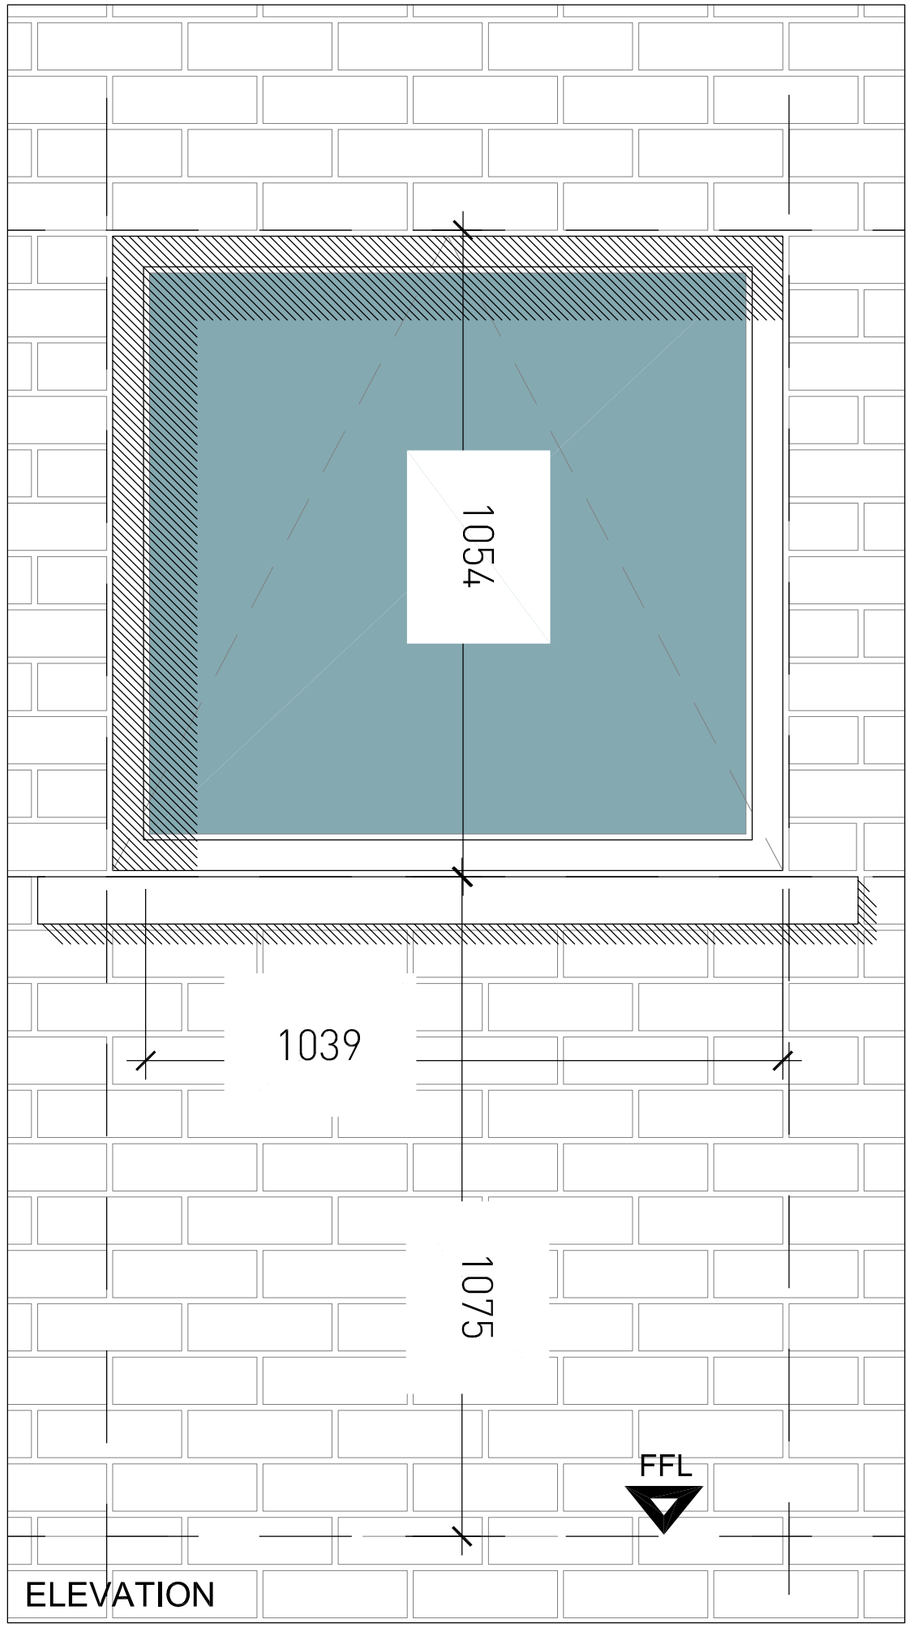

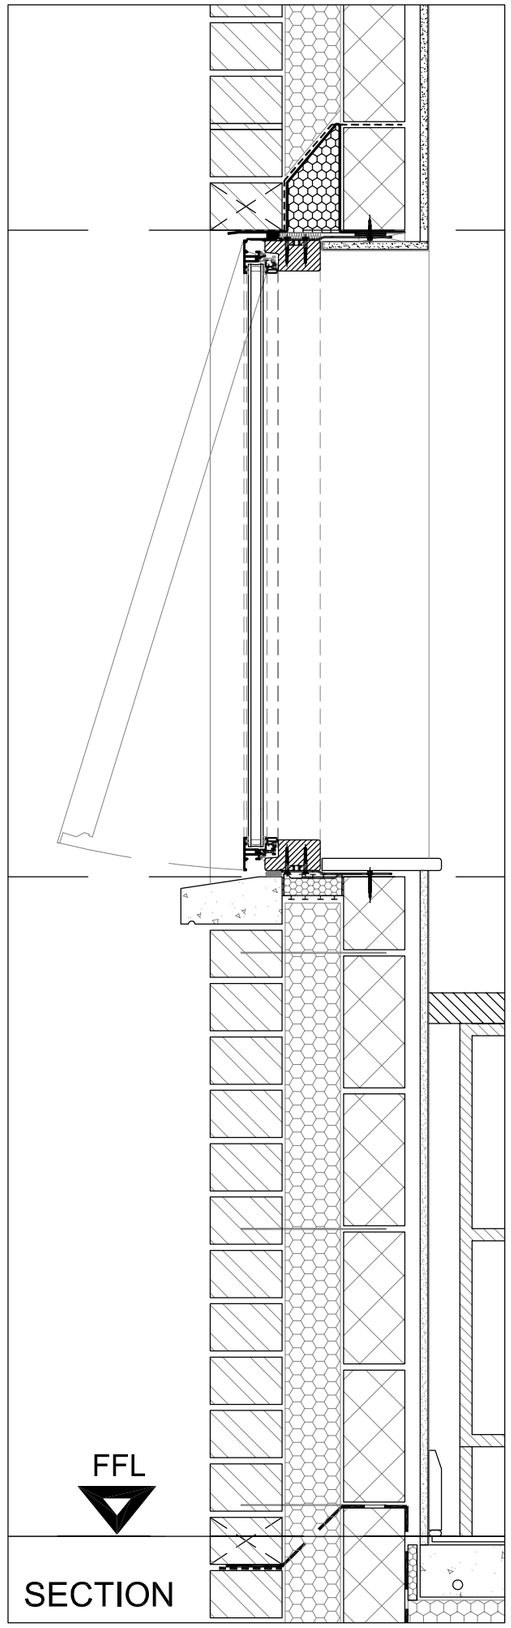

Front Gable End Window

WINDOWS

Velfac 200 top pivot opening window 1.4 W/m2K

Window installed 50mm back from brick face

External finish - grey aluminium RAL 7016

Internal finish - white painted

WALL BUILD UP

Wall build up to achieve minimum 0.28 W/m2K

100mm blockwork inner leaf to SE spec.

12.5mm plasterboard with skim layer on dot and dabs

Weepholes

117mm reused bricks from original outhouse

Kingspan Kooltherm K106 'full fill' insulation (10mm residual cavity)

Wall ties at 450mm vertical and 900mm horizontal centres

Mill House
Congleton
Cheshire
CW12 3QQ

1:10 @ A3
June 2018