SAMMONS REF 2015 - 2008 - 20

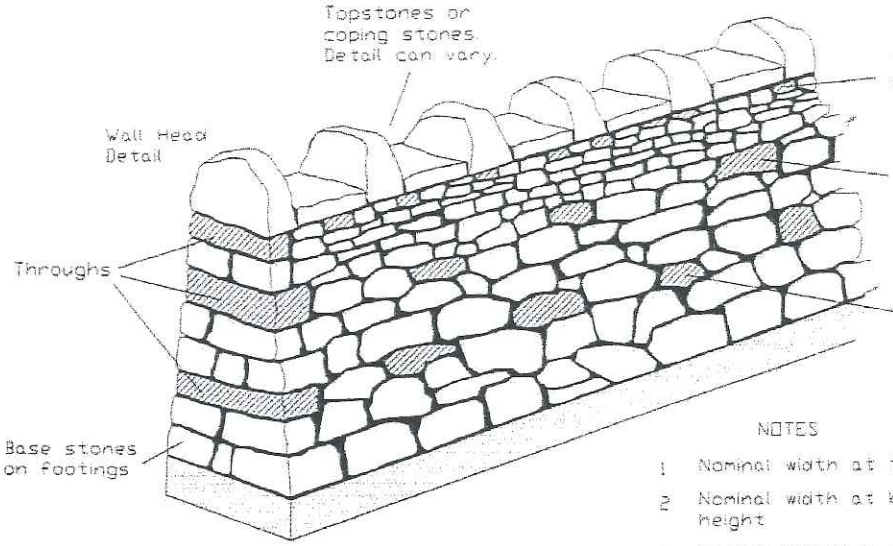


NOTES

1. Nominal width at topstones is 0.3m
2. Nominal width at base is 0.5m or half wall height
3. Nominal height is 1 - 1.6m to match existing or agreed with the engineer.
4. Courses to be horizontal with stones graded largest towards the bottom. Stones sould be clean and free from soil, etc
5. Base stones to be mortared onto 0.15m minimum thickness Foundation Footing.
6. Fillings should be added to central void. No Fillings allowed on external faces or joints.
7. Recommended mortar mix is 1/2/9 ordinary cement/ hydrated lime/ coarse sand for Sandstone and Gritstone, and 1/1/6 for harder stones.
8. Use only local stone where patching and existing stones should be faced with weathering and litchen outermost.
9. Width of joints to be nominally 10mm to 25mm, slightly recessed and shaped to avoid water traps
10. Through wall drainage or flanking must be considered where appropraite.
11. Erection of all walls to be carried out in accordance with the Dry Stone Walling Association's guidelines by a suitably qualified stone mason.

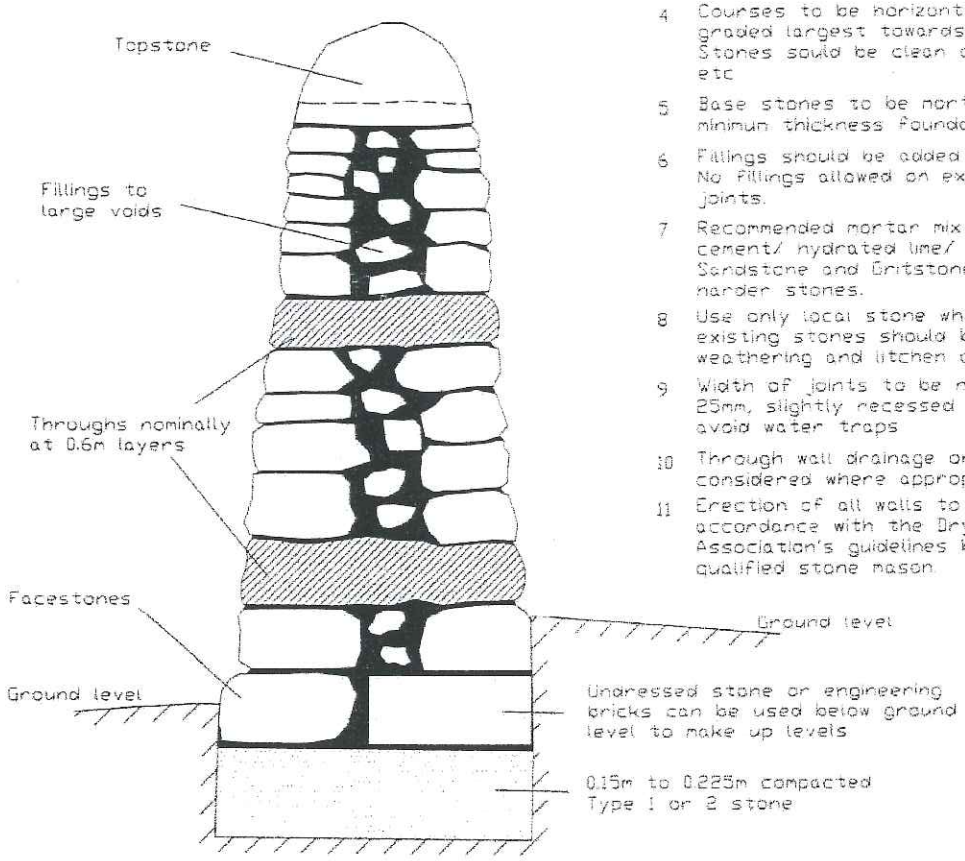


100mm