

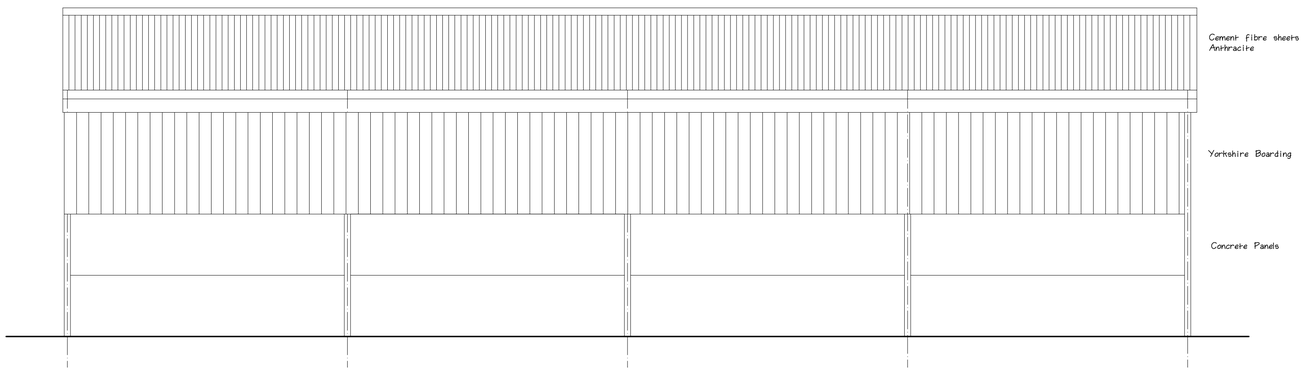



SOUTH WEST ELEVATION

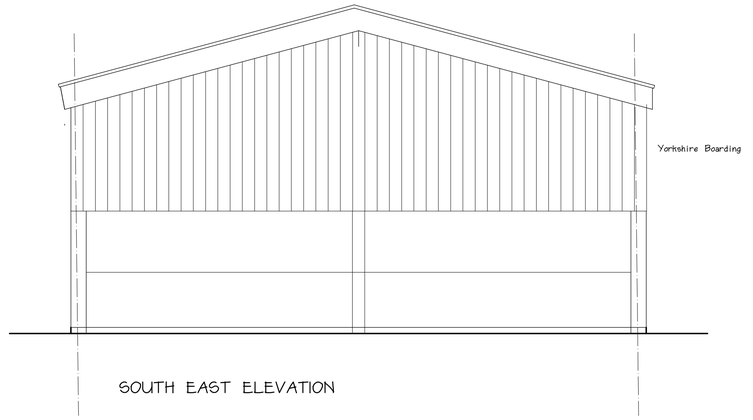


SOUTH EAST ELEVATION

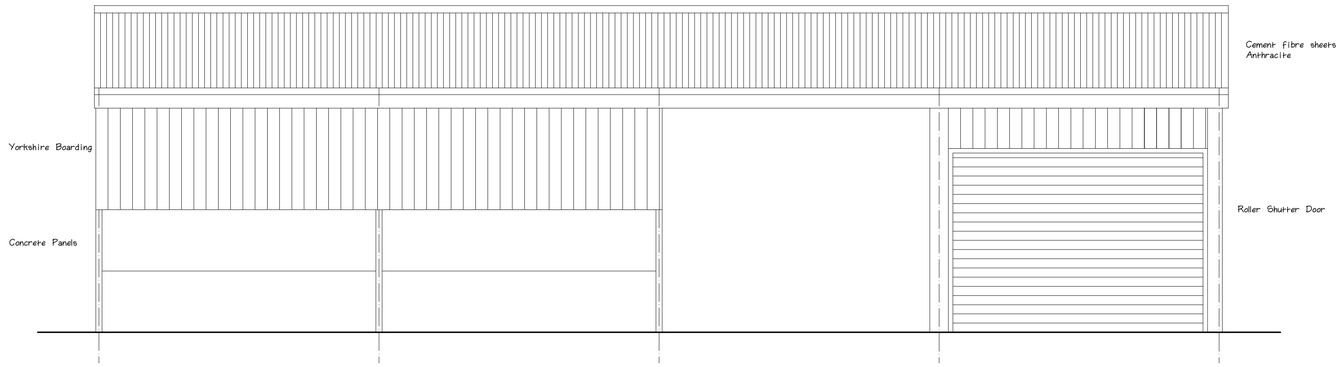


NORTH EAST ELEVATION

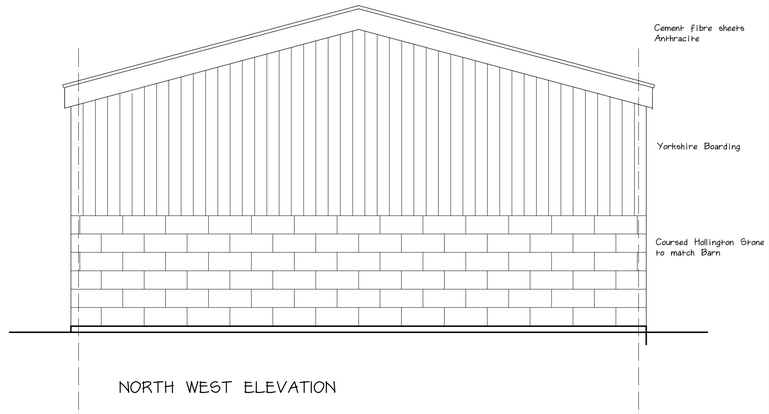

NORTH WEST ELEVATION

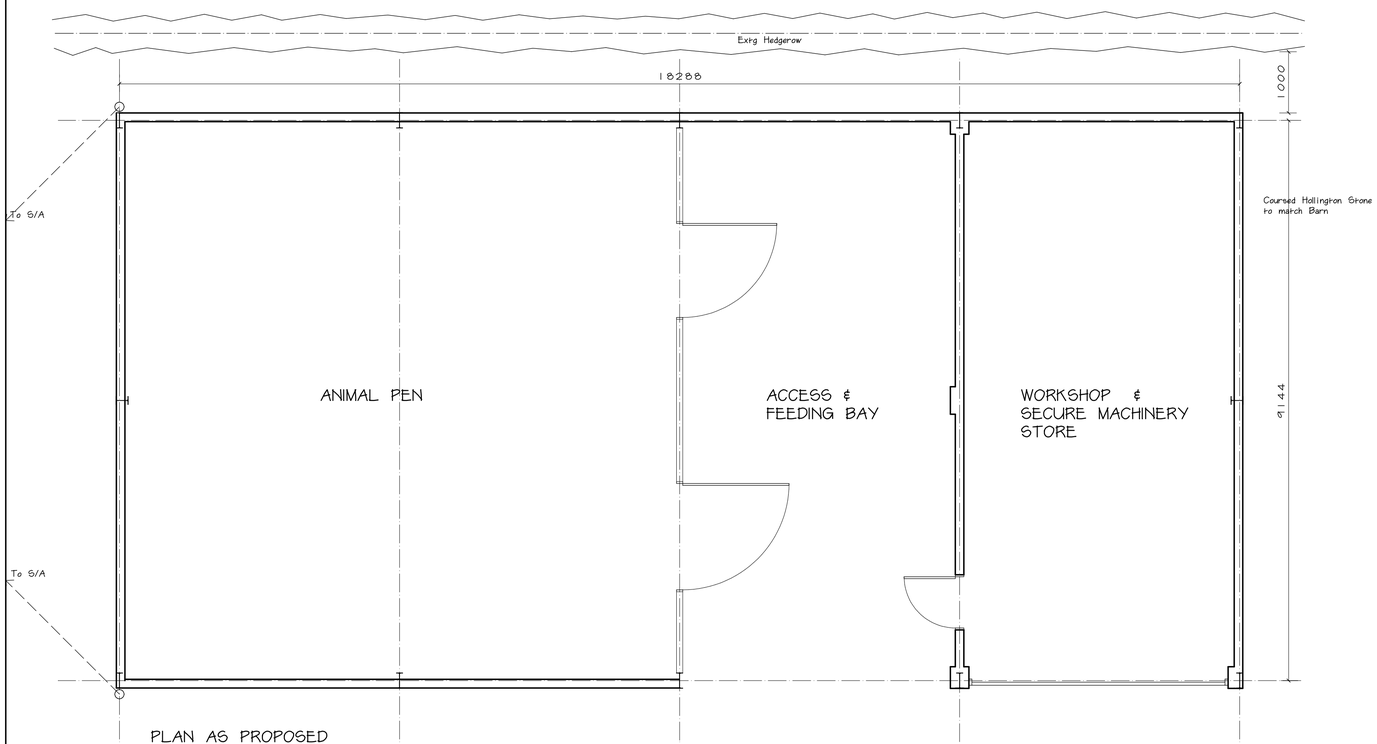

PLAN AS PROPOSED

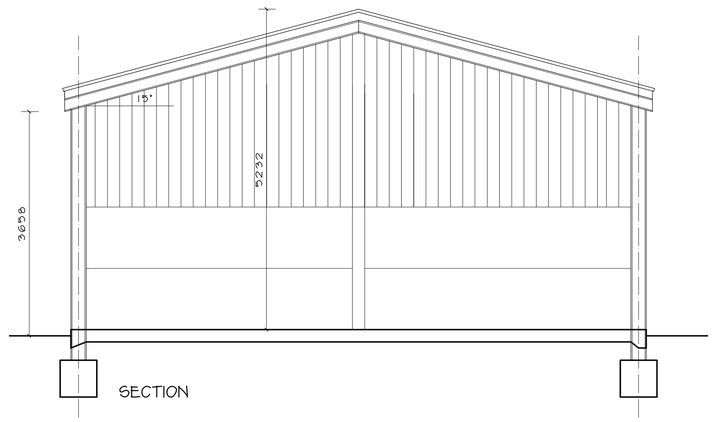

SECTION

Work strictly to dimensions given.
Contractor to check all dimensions, levels and setting out prior to commencement.
Any discrepancies must be reported immediately, before proceeding with work.

SPECIFICATION

PITCHED ROOF :-
CEMENT FIBRE SHEETING (ANTHRACITE) ON STEEL FRAME AT 15 DEGREE PITCH, DESIGNED AND SUPPLIED BY SPECIALIST WHO WILL SUBMIT CALCULATIONS TO L.A AS REQUIRED

WALLS :-
140mm HOLLINGTON STONE WALL CONSTRUCTION TO MATCH BARN, TIED TO STEELWORK WITH GALV MS TIES, AND TIED TOGETHER WITH TIES AT EVERY THIRD COURSE.
WALLS TO BE BUILT OFF 450mm WIDE DEEP STRIP CONCRETE FOUNDATIONS TO 1M DEPTH
INTERNAL WALL OF 100mm MODULITE BLOCKWORK.
PRE-STRESSED CONCRETE LINTOLS USED INTERNALLY.
YORKSHIRE BOARDING BUILT ABOVE TWO 1M CONCRETE PANELS TO OTHER EXTERNAL ELEVATIONS.

FLOORS :-
150mm CONCRETE GROUND FLOOR SLAB ON 1200G POLYTHENE DPM TURNED UP TO FLOOR LEVEL, ON 50mm SAND BLINDING ON 200mm SELECTED AND WELL CONSOLIDATED HARDCORE

DRAINAGE :-
SURFACE WATER TAKEN TO 1M CUBE SOAKAWAY AT MIN 5M FROM BUILDINGS.

ELECTRICAL AND VENTILATION :-
ALL WORK TO BE CARRIED OUT TO IEE REGULATIONS AND TO MEET THE REQUIREMENTS OF PART P OF THE BUILDING REGULATIONS. WORK TO BE DESIGNED, INSTALLED & TESTED BY A PERSON COMPETENT TO DO SO, AND ON COMPLETION, A CERTIFICATE TO SHOW COMPLIANCE WITH BS 7671 MAY BE REQUIRED BY THE BCO.

No.	Date	Content
Revisions		

PETER J. RHODES
66 Hawthornden Avenue, Uttoxeter
Staffs ST14 7NZ Tel/Fax: 01889 563890

Architectural Planning and Building Design Services

Project

PROPOSED NEW BUILDING
MEADOW VIEW BARN
RECTORY ROAD
HOLLINGTON
STAFFS ST19 4HH

Client

MR A WILSON

Drawing

WORKING DRAWING

Scale	Date
1 - 50	APRIL 2019

Drawing No.

1359 / 2 A

SCALE BARS
1-50 0 1000 MM
1-100 0 1000 MM
1-500 0 10 MM
1-1250 0 10 20 MM
A1 SHEET