NEW DOOR & WINDOW OPENINGS

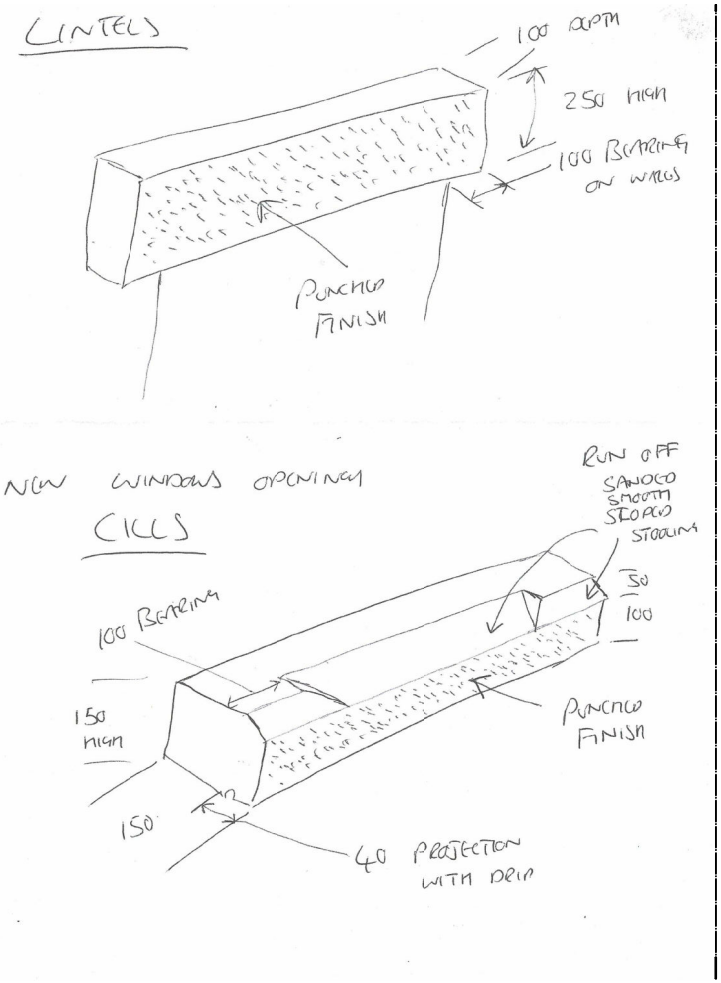

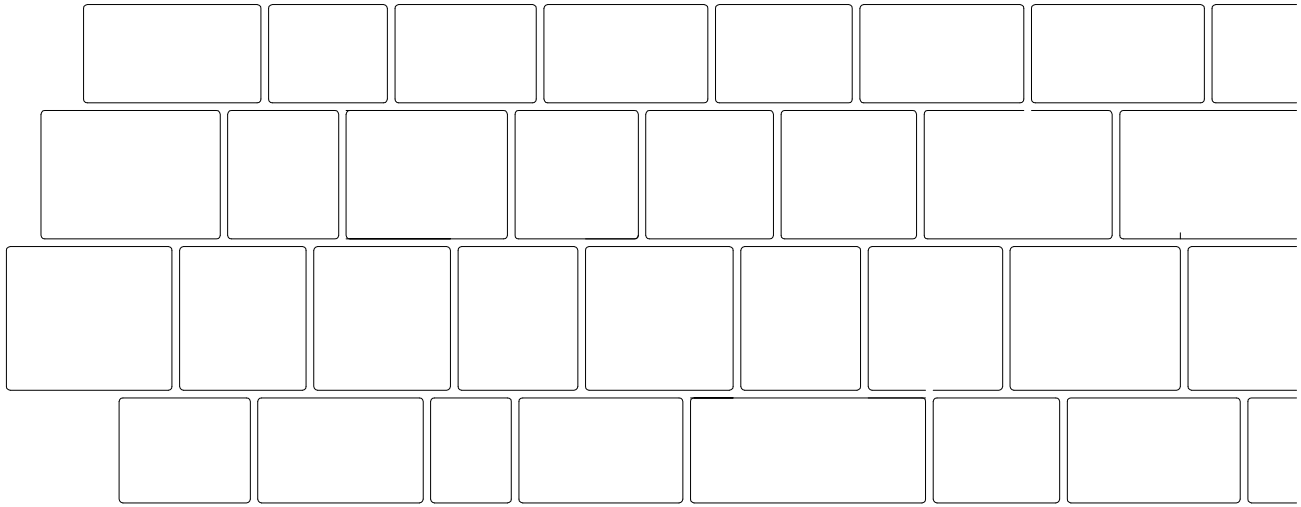

ELEVATION OF EXTERNAL WALLING

(showing typical bonding pattern)

NOTES

1. New stone to match existing (sample to be made available for inspection on site as required)
2. New walls to be laid in random courses varying between 75 and 250 in depth
3. Length of new stone blocks to vary between 1x and 2x depth
4. Pointing to be sand/ lime mortar (3 sand/1 NHL2.5) with slightly recessed tamped finish

job	Holly Tree House, Horton Renovation and Alterations		
title	Stone Walling Details		
date 29.07.19	scale 1/10 @ A4	dwg. no. HTH-101	rev. .

Ian Ankers architecture
Building and Design Consultants
Ryecroft Farm, Rushton Spencer, Macclesfield, SK11 0RP
t 01260 546944
e ian@iananders.co.uk
w www.iananders.co.uk