Construction/ Alterations Schedule Carried out

01. contemporary facing brick plinth wall and timber post removed: original Minton style encaustic tiles below exposed and retained

02. contemporary facing brick plinth wall and timber post removed: timber floor exposed: local repairs to ornate profile plaster coving required.

03. contemporary facing brick plinth wall removed: contemporary flagged floor exposed beneath.

04. contemporary facing brick plinth wall removed: contemporary flagged floor exposed beneath.

05. new 2200 high, 50thk stud partition wall with gypsum plasterboard to exposed faces; gypsum plasterboard ceiling above at 2100h (area shown hatched).

06. new 100thk stud partition wall (floor to ceiling) gypsum plasterboard to exposed faces

07. new 100thk stud partition wall atop extg contemporary bar-top with gypsum plasterboard to exposed faces

08. new 100thk stud partition wall (floor to ceiling) with gypsum plasterboard to exposed faces

09. 2nos arched window openings (void of casements) blocked up with 100thk stud partition with gypsum plasterboard to exposed faces

10. contemporary facing brick plinth wall removed: contemporary flagged floor exposed beneath.

11. new 100thk stud partition wall within extg door reveal, to take new door and frame.

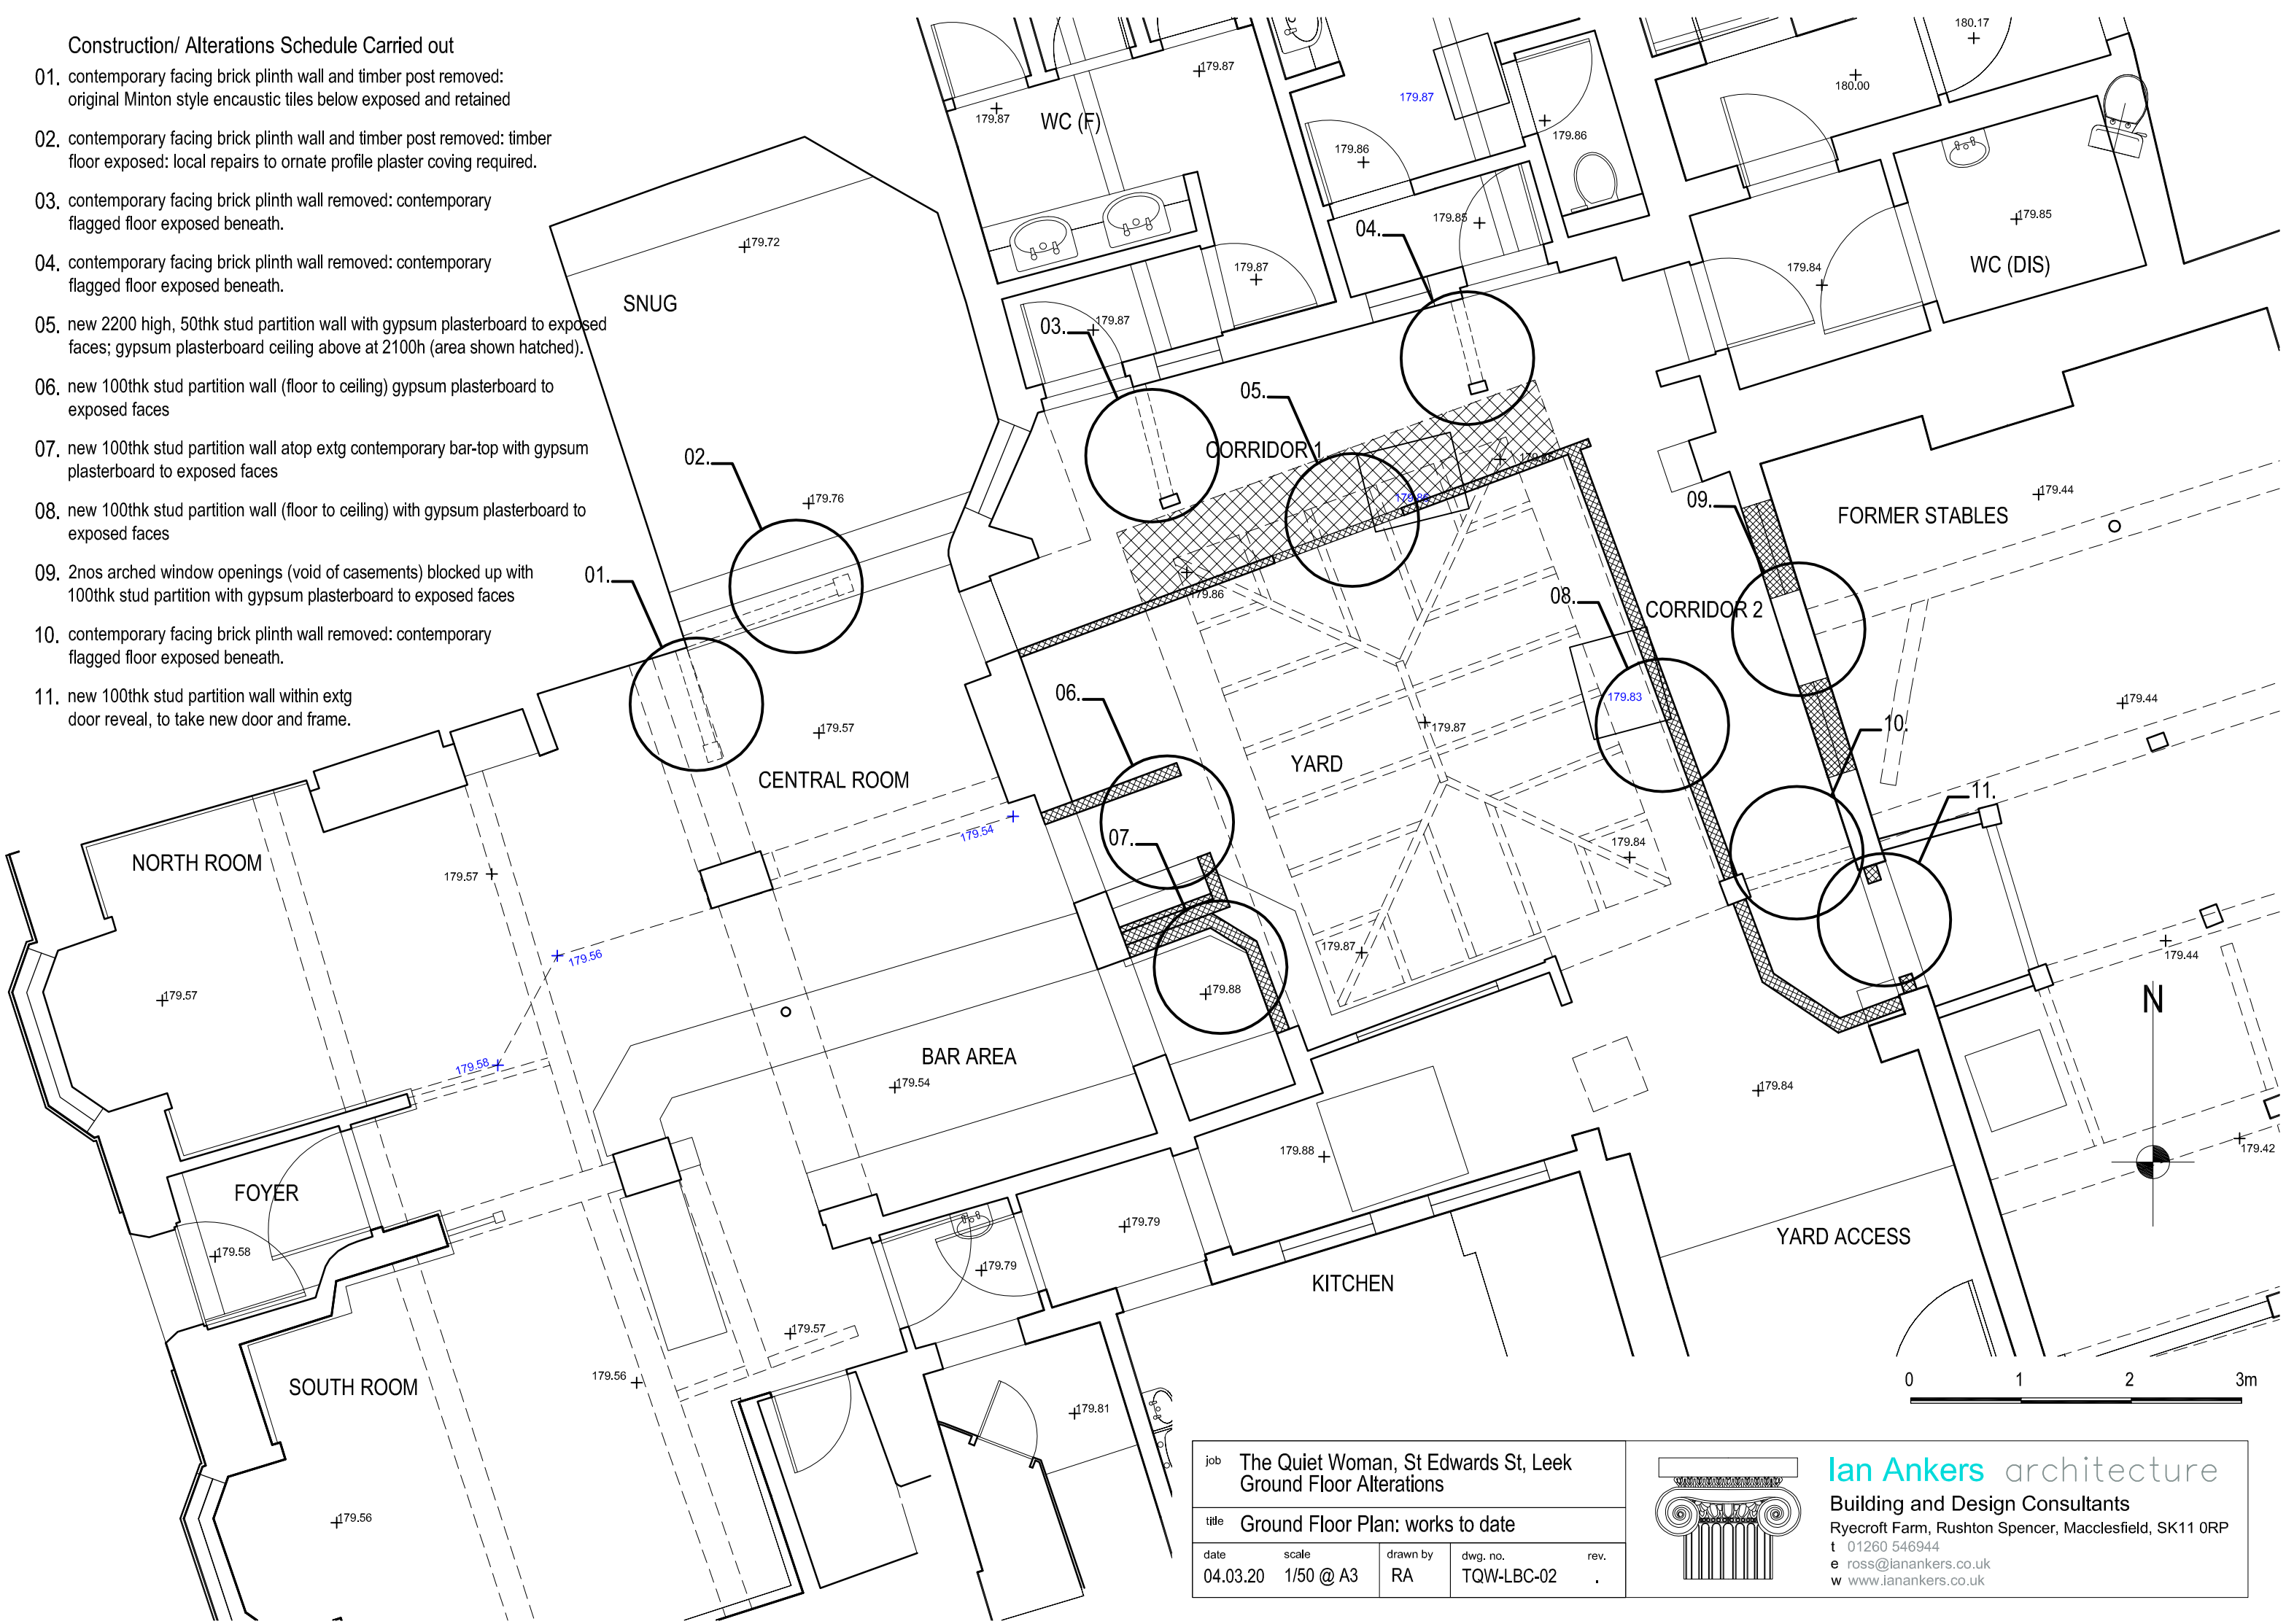

job	The Quiet Woman, St Edwards St, Leek Ground Floor Alterations				
title	Ground Floor Plan: works to date				
date	scale	drawn by	dwg. no.	rev.	
04.03.20	1/50 @ A3	RA	TQW-LBC-02	.	

Ian Ankers architecture
Building and Design Consultants
Ryecroft Farm, Rushton Spencer, Macclesfield, SK11 0RP
t 01260 546944
e ross@ianankers.co.uk
w www.ianankers.co.uk