Construction/ Alterations Schedule Proposed.

All newly formed stud partitions with plasterboard faces to be finished with gypsum plaster skim and paint (in heritage colours); see drawing TQW-LBC-02 for wall locations

New lighting circuit and fixtures to be installed in contemporary ceiling void below courtyard flat roof

12. make good wall, ceiling and coving affected by plinth wall & post removal using traditional lime plaster: paint affected areas with heritage, breathable, water-based paint.
13. form timber studwork structure to support 1200 x 750 x 500 fishtank; set flush to corridor face of studwall.
14. new timber door in altered opening.
15. stud partition continued to for alcove and blocking public access to the glazed inner courtyard.

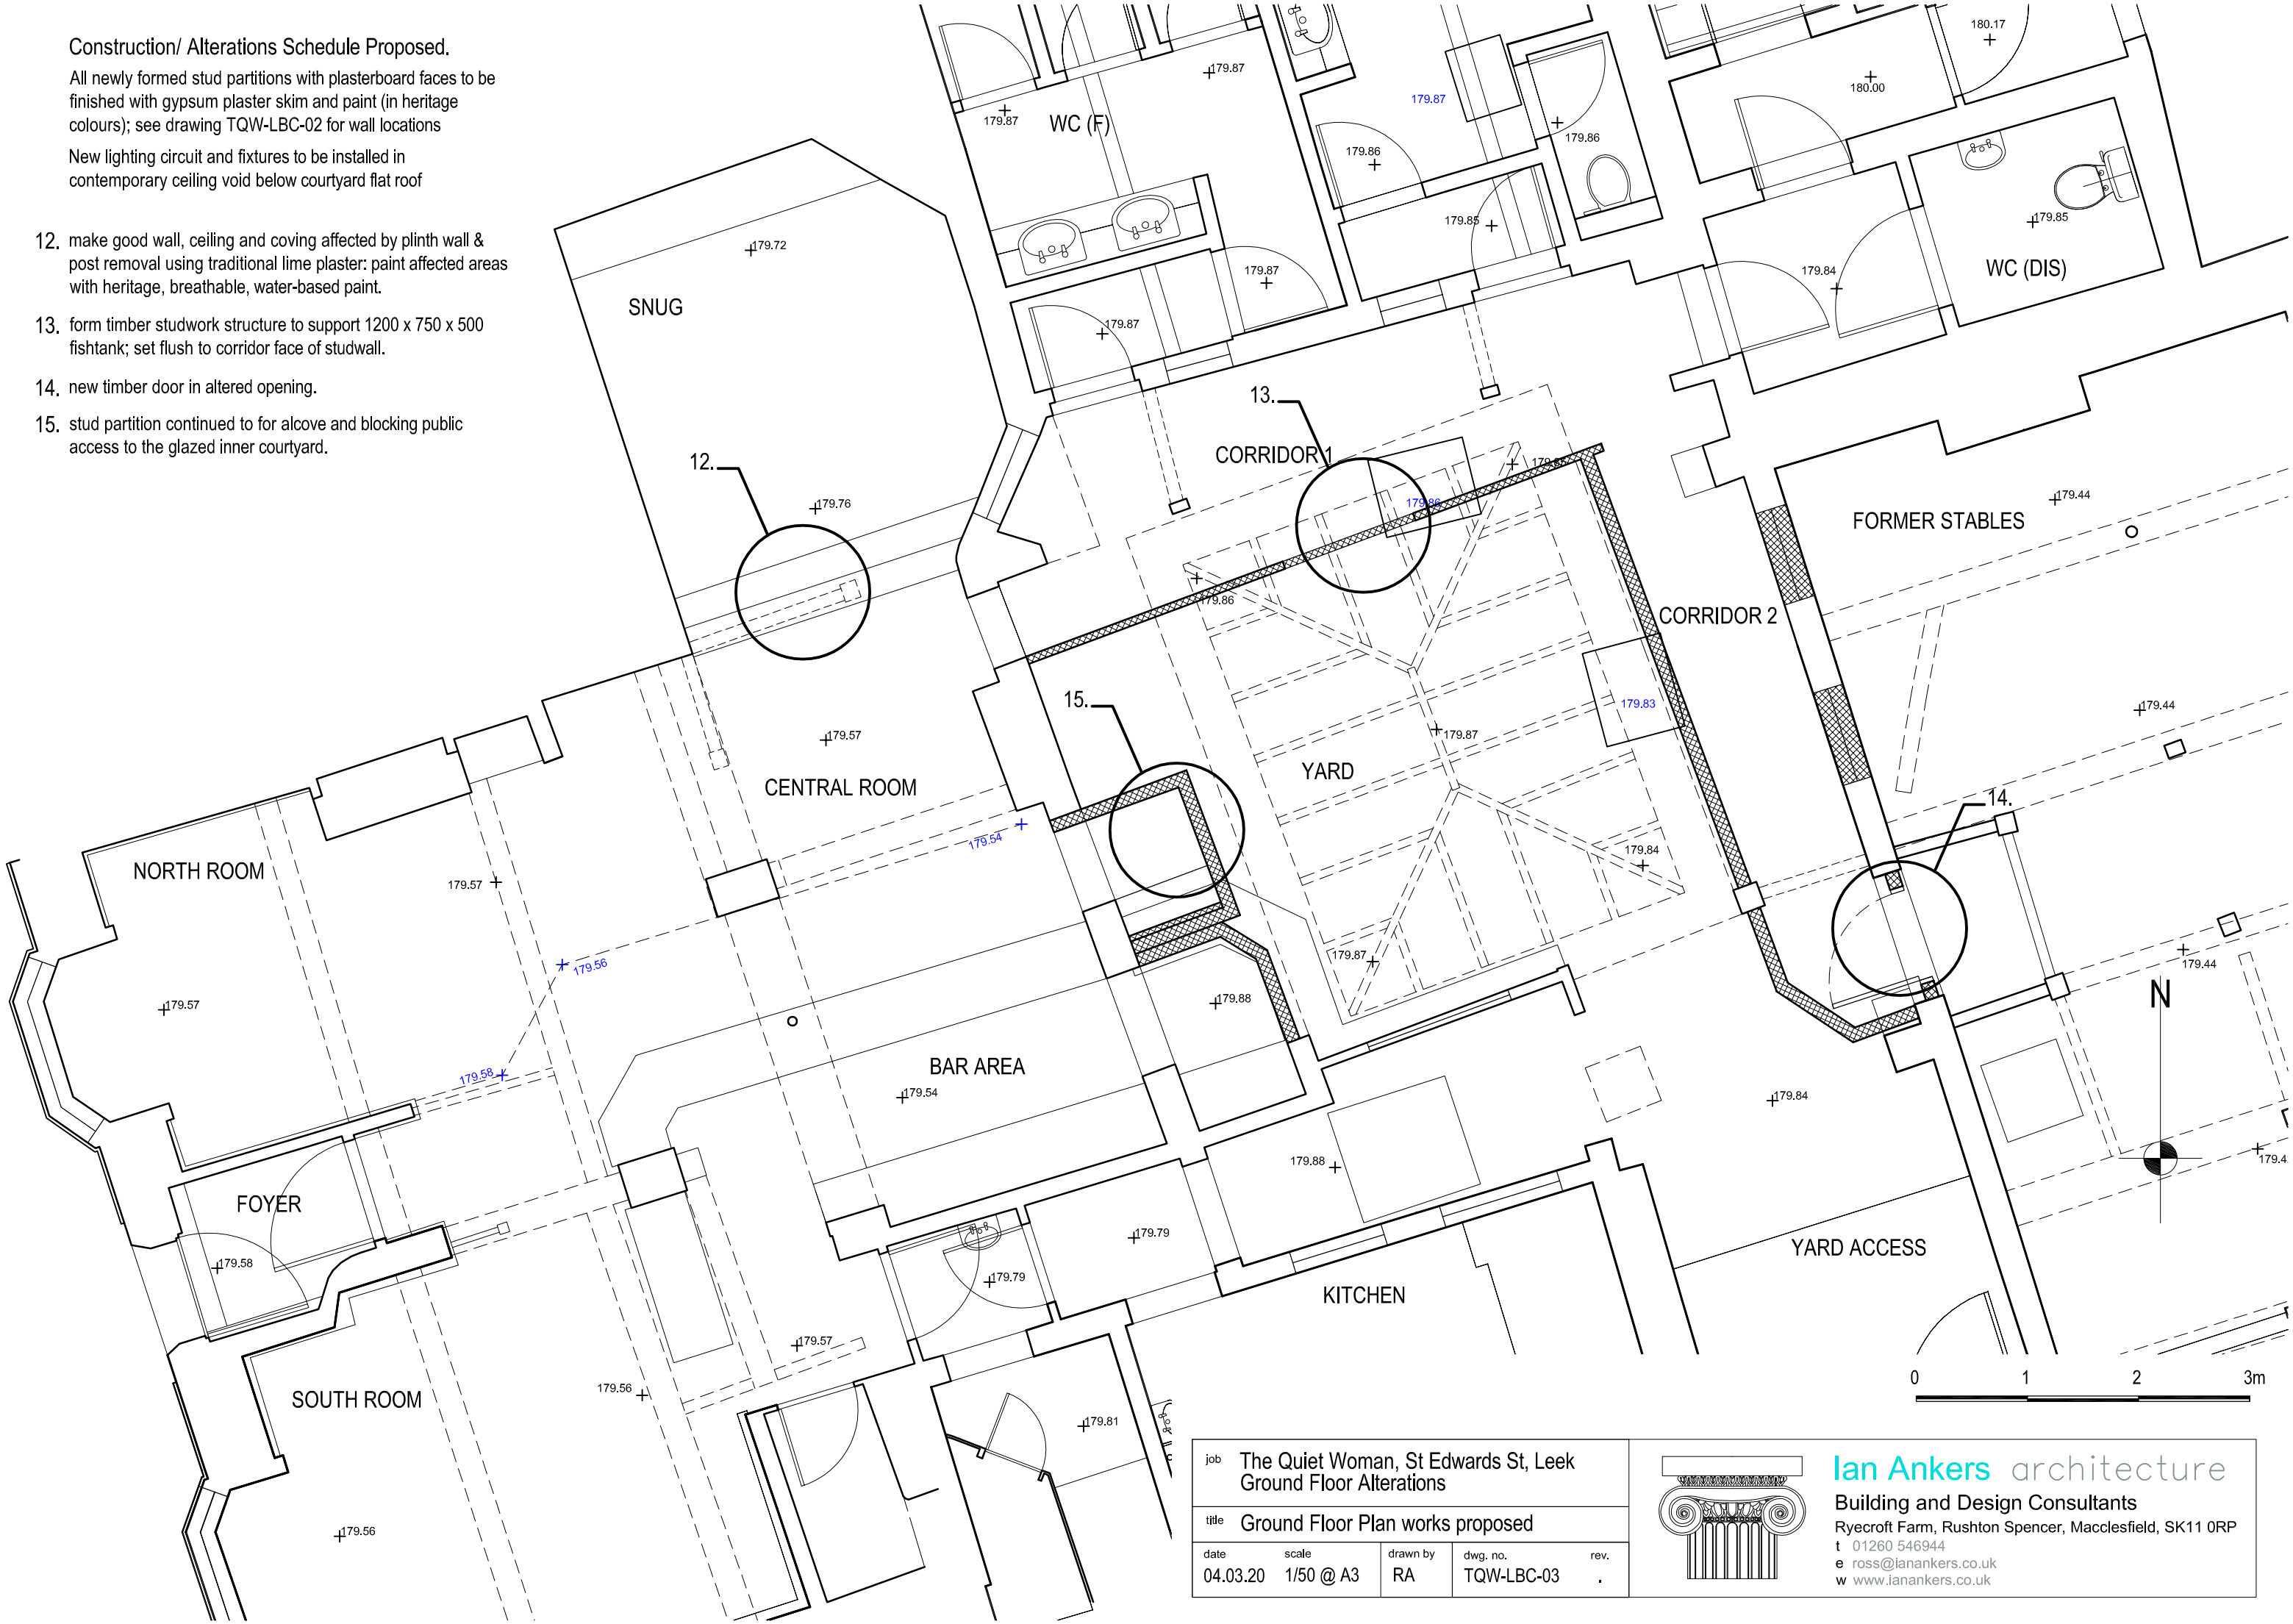

job	The Quiet Woman, St Edwards St, Leek Ground Floor Alterations				
title	Ground Floor Plan works proposed				
date	scale	drawn by	dwg. no.	rev.	
04.03.20	1/50 @ A3	RA	TQW-LBC-03	.	

Ian Ankers architecture
Building and Design Consultants
Ryecroft Farm, Rushton Spencer, Macclesfield, SK11 0RP
t 01260 546944
e ross@iankers.co.uk
w www.iankers.co.uk