

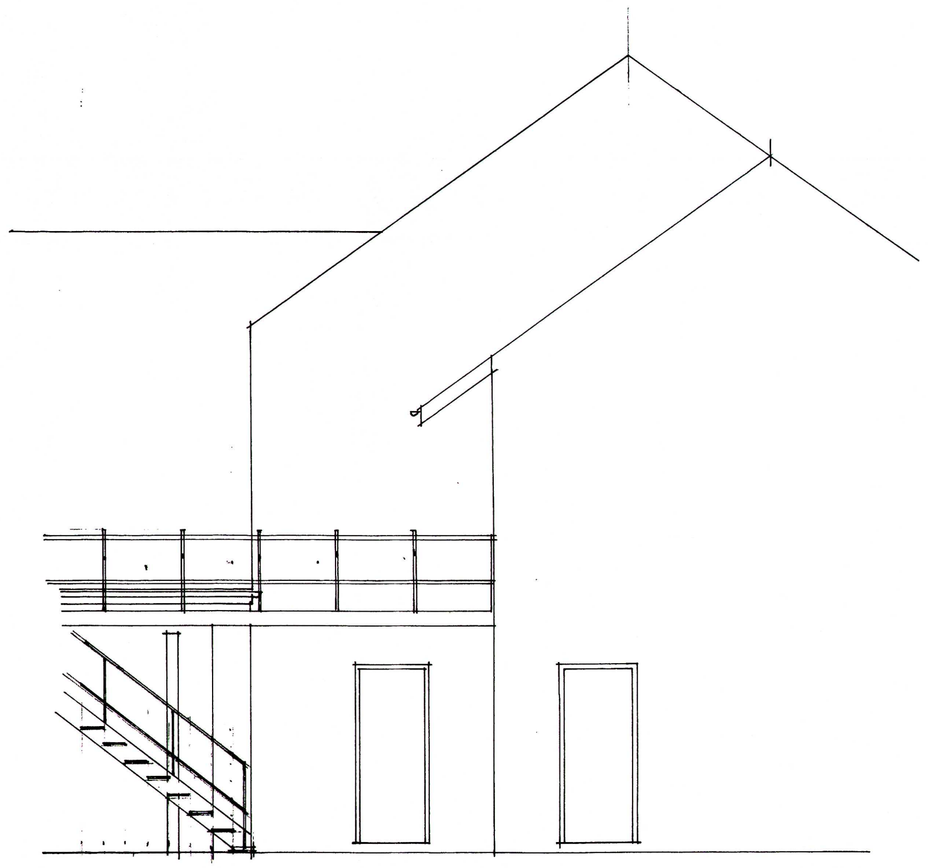



North elevation. (existing).

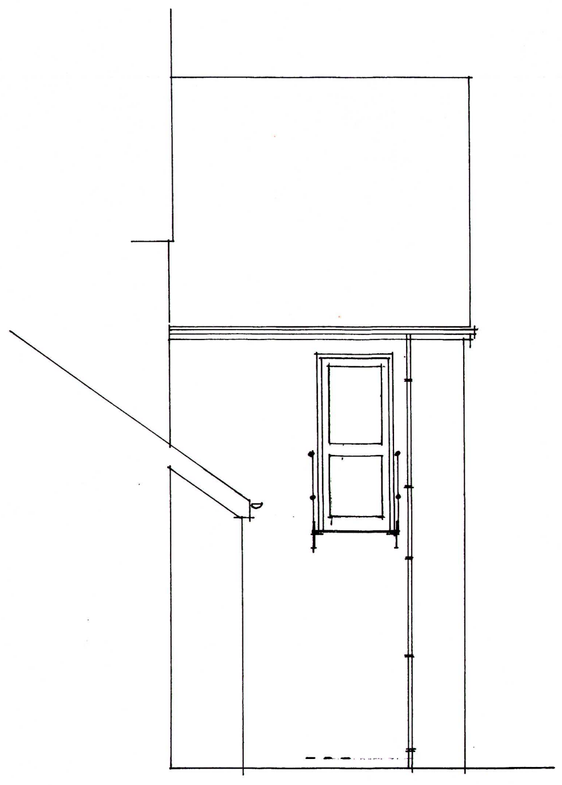


East elevation. (existing).

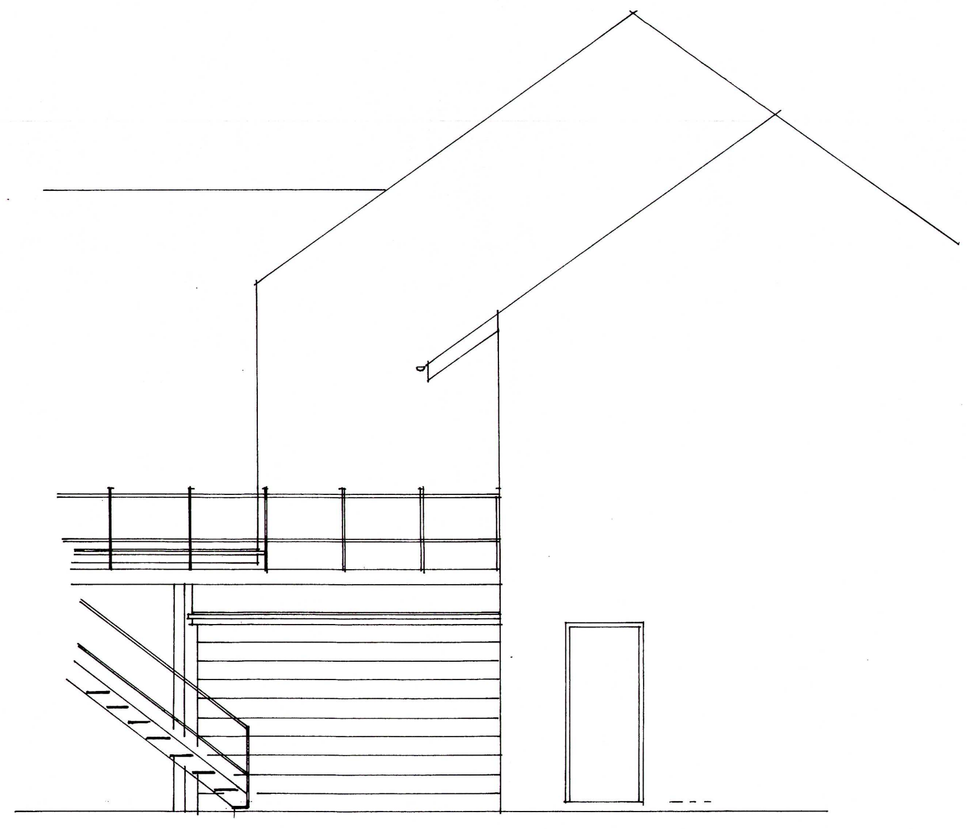


North elevation. (proposed).

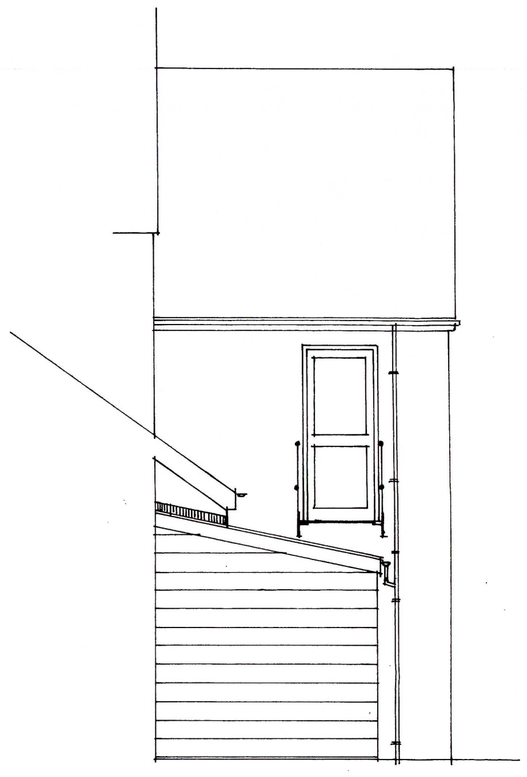


East elevation. (proposed).

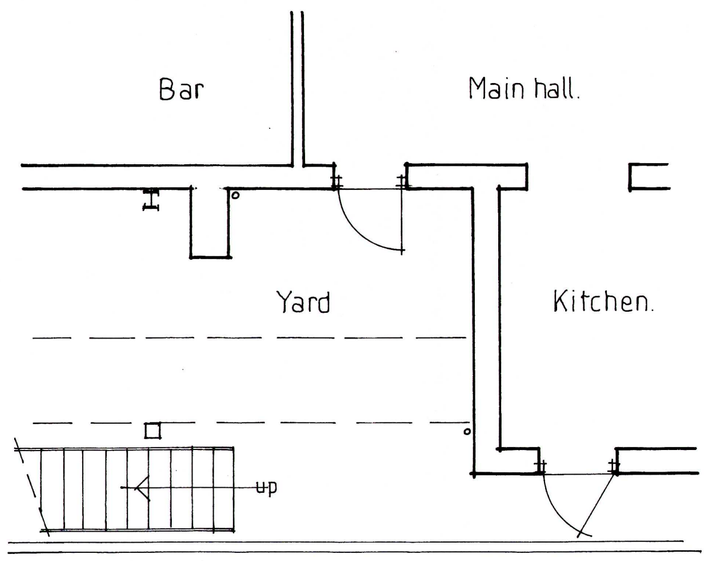

Ground floor plan. (existing).

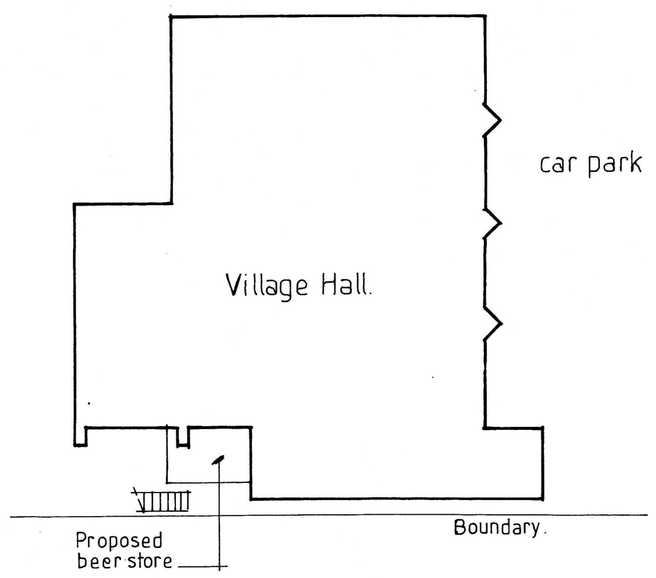

Plan showing location 1:200 (proposed).

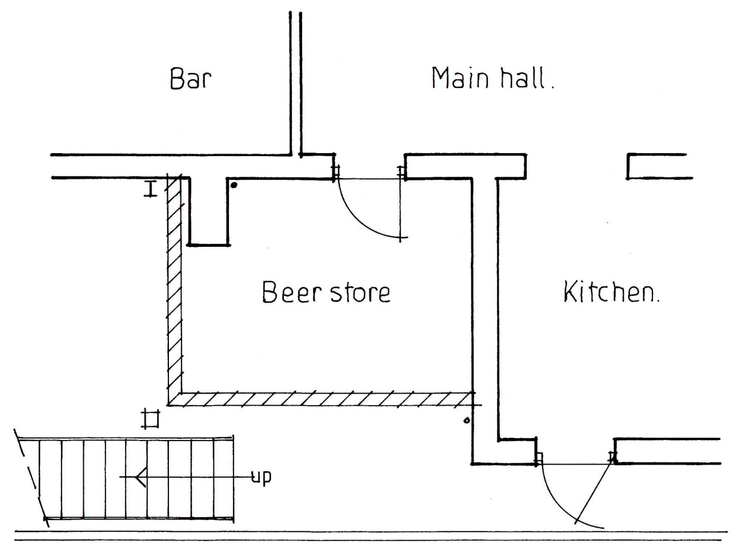

Ground floor plan. (proposed).

NOTES

External walls to be constructed of pointed 150mm concrete blockwork. Tie all new work to existing with stainless steel wall starters plugged and screwed to existing structure and ties at 225mm centres built in to new walls.

Flat roof to be of 12mm mineral spa chippings on 3 layers built up felt roofing or single layer of fibreglass roofing system. Fit UPVC fascias, barge boards. Gutter and rainwater pipe to be in UPVC. Gutters to be 'Hepdrain' 112mm half round gutters laid to 1 in 600 falls, with 68mm diameter rainwater pipe connected to existing pipe.

Site to be left clean and tidy on completion and any damage to adjoining areas to be made good. All works to be carried out in strict accordance with all relevant BS Codes of Practice, good building practice and all relevant Health & Safety Legislation. All dimensions and levels to be checked on site.

WHISTON VILLAGE HALL

DATE **February 20**

PROPOSED EXTENSION TO FORM BEER STORE

AT	**SCALES:**	
WHISTON EAVES LANE,	FLOOR PLANS	1:50
WHISTON,	PLAN SHOWING	
STOKE-ON-TRENT,	LOCATION	1:200
STAFFS. ST10 2JB	ELEVATIONS	1:50

DRAWN BY:

MALCOLM SALES
QUANTITY SURVEYORS, DESIGNERS & BUILDING COST CONSULTANTS
CHURCHILL SUITE,
LULWORTH HOUSE,
51, HIGH STREET,
CHEADLE, STOKE-ON-TRENT,
STAFFS. ST10 1AR
TEL: 01538 757233
MOB: 07889 225437
E-MAIL Malcolm.Sales@salesqs.co.uk

AS PROPOSED

FOR CLIENT TO DISCUSS WITH PLANNING OFFICERS

DRAWING NR. 2001/19/01