



N&J TREE SERVICES LTD

Willfields, Willfield Lane, Brown Edge, Stoke-on-Trent, Staffordshire, ST6 8SN
Company Reg No. 5319607

www.njtreeservices.co.uk

m: 07768 555344

t: 01782 502847

BS 5837:2012 Tree Survey Report and Arboricultural Impact Assessment (AIA)

Location;
117 Leek Road,
Endon, Stoke on Trent
Staffordshire,

Date of Inspection;
23rd April 2021

Commissioned by;
Adam Gregory,
Forefront Development Consulting Ltd

Survey carried out by;
Kristian Turner. FdSc Arb. Tech Arbor A
Arboricultural Association Professional Tree Inspector.



Contents

- 1.0 Summary
- 2.0 Introduction
- 3.0 Survey Methodology, Collection and Assessment of Data
- 4.0 Data Collection
- 5.0 Tree Survey
- 6.0 Barriers and Surfaces
- 7.0 Structural damage
- 8.0 Conclusions and Tree Protection Plan
- 9.0 Other Considerations
- 10.0 Bibliographical References
- Tree Location Plan and Tree Protection Plan Appendices 1-6
- Tree Data Table

1.0: Summary

1.1: N&J Tree Services was commissioned in April 2021 by Adam Gregory of Forefront Development Consulting Ltd to conduct a preliminary tree survey under the guidelines of **BRITISH STANDARDS 5837:2012** *Recommendations for trees in relation to design, demolition and construction*. (BS5837) and an Arboricultural Impact Assessment (AIA) of the proposed development of 117 Leek Road, Endon, Staffordshire

1.2: The primary purpose of this report is to make an appraisal of the trees that stand on the afore mentioned 117 Leek Road. This report evaluates the condition and amenity value of the trees assesses any constraints they may impose on re-development proposals. This report provides information on any tree that should be removed and how the trees being retained should be protected during the development process.

1.3: The tree survey of the application site was carried out by Kristian Turner (of N&J Tree Services) on the 23rd April 2021 during daylight hours.

1.4: The appraisal found two individual trees. Both trees are growing adjacent to the Leek Road. The report shows the location required for root protection area (RPA) protective barriers.

Any trees to be retained should be protected taking into account the minimum distances for tree protection barriers advocated in BS5837:2012. See Fig 9 for the extent of such protective barriers required around each of the retained trees.

1.5: Full details of arboricultural works recommended for the trees are listed in chapter 8 of this report.

For further information on this survey and report, contact;

Kristian Turner, N&J Tree Services

Mob; 07976534780

2.0: Introduction

2.1: Background and commission

N&J Tree Services was commissioned in April 2021 by Forefront Development Consultancy Ltd to conduct a preliminary tree survey under the guidelines of **BRITISH STANDARDS 5837:2012** *Recommendations for trees in relation to design, demolition and construction*. (BS5837) and an Arboricultural Impact Assessment (AIA) of the proposed development within the grounds of 117 Leek Road. Endon

2.2: Aims of the survey

This arboricultural assessment aims to

- evaluate the condition and amenity value of the trees on site.
- advise on how the trees are likely to impact on the proposed development.
- advise on how the proposed development is likely to impact upon the trees.
- provide information on any trees that should be removed.
- provide information on how those trees being retained should be protected during development process.

2.3: Site Context

The survey site is the front driveway of 117 Leek Road. There is vehicle access from the road onto a concrete and hardcore driveway. The main area of the drive is a broken concrete slab with the left and right areas being well used hardcore areas. The trees are located in small borders along the front of the drive. The driveway is bordered by small hedges and shrubs. The driveways either side have similar plants and trees with block paving.

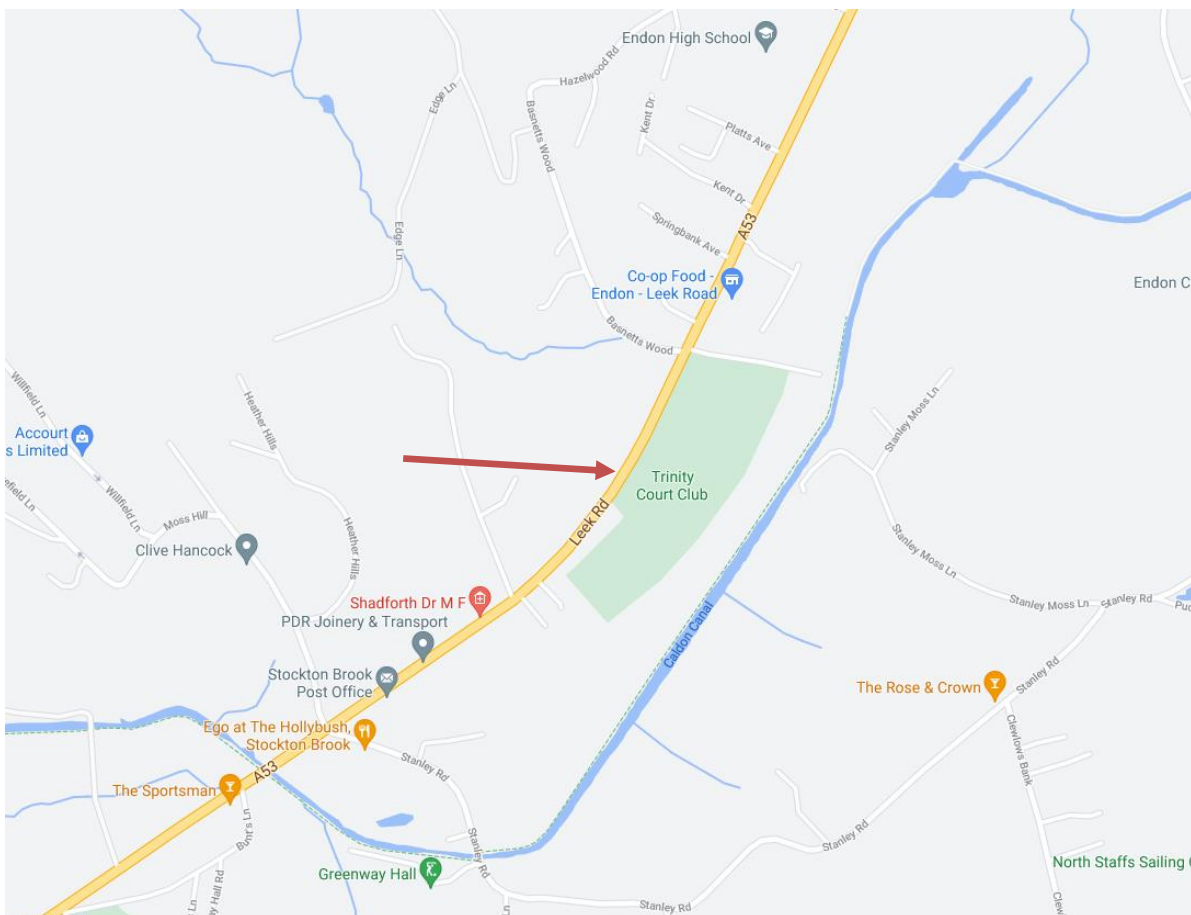


Fig 1: Survey site location shown by red arrow. (Google Maps 2021)

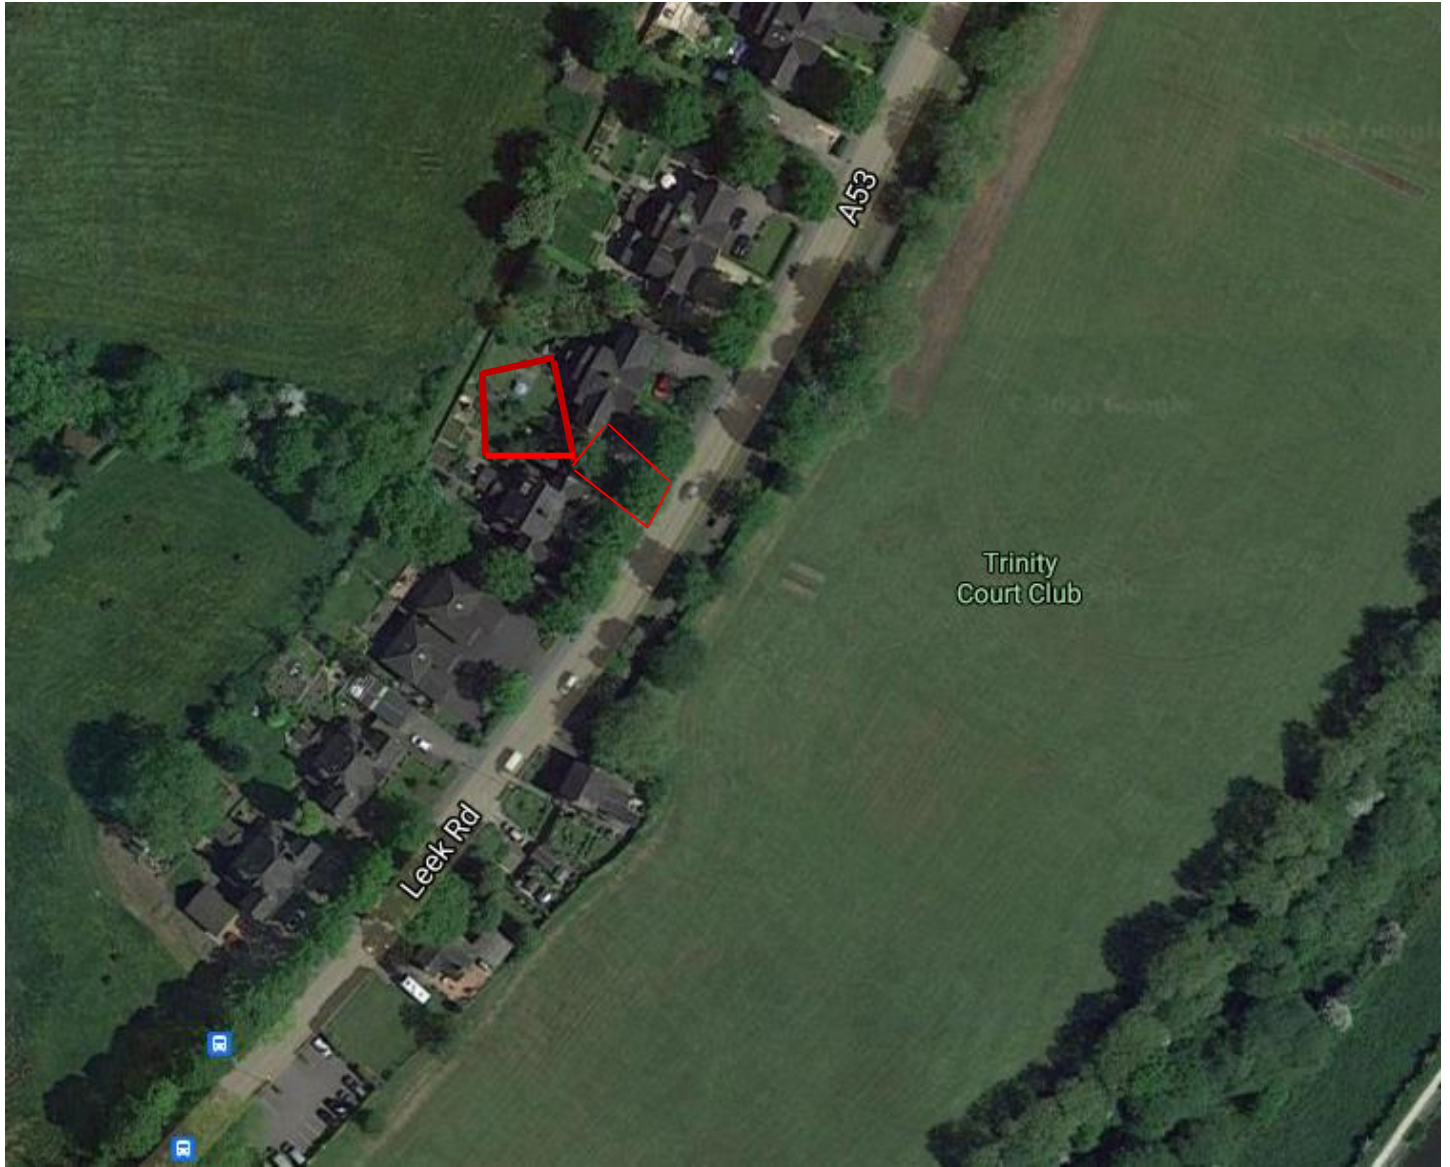


Fig 2: Survey shown in red outline. (Google Maps 2021)

3.0: Survey Methodology, Collection and Assessment of Data

3.1: Survey Methodology

The site was surveyed by Kristian Tuner, 23rd April 2021. The inspection only consists of a visual tree assessment, no decay detection or other specialised equipment was used. The survey was carried out from ground level. The weather during the survey was bright and sunny. Visibility was good but sometimes impeded by the bright sun. The trees were starting to come into leaf.

3.2: Tree height, crown spread and canopy height were estimated; a tape measure was used for all other dimensions, although in some instances the undergrowth prevented access to the trees in this case all of the tree measurements were estimated.

Data was collected to comply with the recommendations of BS5837:2012 *Trees in relation to construction* (BS5837).

3.3: Trees are dynamic living organisms and although their health and structure can be assessed, an absolutely safe assessment is not realistic as unpredictable failure can never be ruled out. Trees are also susceptible to climatic conditions and more extreme weather, including high winds, drought and snow. These conditions can cause healthy

trees to fail. N&J Tree Services cannot be held liable for any such failures. It would be advisable to re-inspect after any period of severe weather. Therefore this report is only valid in relation too; the weather, the condition of the trees and the condition of the site on the day of the investigation.

3.4: No soil samples were taken for analysis on this investigation.

3.5: Any site information, history or legal descriptions given are taken as accurate.

3.6: The report is only valid as a whole, any alterations or omissions invalidate it entirely. The report is valid for six months only. Any legal matters that arise from this report are not the responsibility of N&J Tree Services and the consultant is not required for any further testimony or investigations unless relevant new arrangements are made.

3.7: **Survey personnel.** Kristian Turner has 18 years' experience working with trees in the Arboricultural industry. He currently holds an FdSc in Arboriculture after studying at the Central University of Lancashire, is a Technician grade member of the Arboricultural Association and is a Professional Tree Inspector through the Arboricultural Association. Kristian is consistently upgrading and expanding his Arboricultural knowledge with continuous professional development, attending training courses and lectures through the Arboricultural Association and reading recently published papers on trees and Arboriculture.

4.0: Data Collection

The tree location plan is shown appendix 1.

4.1: The trees are plotted individually and have their root protection area (RPA) and canopy spread shown with the tree identifiers.

4.2: Key to report

4.3: Reference number

4.4: Species name is given as the common

4.5: The height is the measurement from ground level to the highest point of the tree to the nearest meter.

4.6: Stem diameter at 1.5m from ground level given in mm. # denotes estimated measurement (where access is unattainable)

4.7: Crown spread given at North (N), East (E), South (S), West (W) in meters.

4.8: Height of the first significant branch and direction of growth in meters (2m W) and the height of the canopy in meters.

4.9: The age of the tree as categorised in one of the following age brackets;

Young (Y), Semi-mature (SM),

Mature (M), Over mature (OM), Veteran (V).

4.10: General observations of the structure and physiological condition.

4.11: Estimated remaining contribution, in years less than 10 years, <10 or more than 10 years, >10. It is not possible to foresee beyond a 10 year timescale in relation to trees.

4.12: Category U or A to C grading (Table 1)

Table 1: Cascade Chart for tree quality Assessment. (BS5837:2012)

Licensed Copy: Ip, University of Central Lancashire, 21/03/2015, Uncontrolled Copy, (c) The British Standards Institution 2013

BRITISH STANDARD

BS 5837:2012

Table 1 Cascade chart for tree quality assessment

Category and definition	Criteria (including subcategories where appropriate)	Identification on plan
Trees unsuitable for retention (see Note)		
Category U Those in such a condition that they cannot realistically be retained as living trees in the context of the current land use for longer than 10 years	- Trees that have a serious, irremediable, structural defect, such that their early loss is expected due to collapse, including those that will become unstable after removal of other category U trees (e.g. where, for whatever reason, the loss of companion shelter cannot be mitigated by pruning) - Trees that are dead or are showing signs of significant, immediate, and irreversible overall decline - Trees infected with pathogens of significance to the health and/or safety of other trees nearby, or very low quality trees suppressing adjacent trees of better quality NOTE Category U trees can have existing or potential conservation value which it might be desirable to preserve: see 4.5.7.	See Table 2
Trees to be considered for retention		
1 Mainly arboricultural qualities		
Category A Trees of high quality with an estimated remaining life expectancy of at least 40 years	Trees that are particularly good examples of their species, especially if rare or unusual; or those that are essential components of groups or formal or semi-formal arboricultural features (e.g. the dominant and/or principal trees within an avenue)	See Table 2
Category B Trees of moderate quality with an estimated remaining life expectancy of at least 20 years	Trees that might be included in category A, but are downgraded because of impaired condition (e.g. presence of significant though remediable defects, including unsympathetic past management and storm damage), such that they are unlikely to be suitable for retention for beyond 40 years; or trees lacking the special quality necessary to merit the category A designation	See Table 2
Category C Trees of low quality with an estimated remaining life expectancy of at least 10 years, or young trees with a stem diameter below 150 mm	Unremarkable trees of very limited merit or such impaired condition that they do not qualify in higher categories	See Table 2

© The British Standards Institution 2012 • 9

Table 2: Category Grading of Trees on Site

Abbreviation	Description	Category	Colour Code
U	Trees which should be removed irrespective of any development proposal	Fell	Dark red
A	Trees of high quality whose retention is most desirable	High	Light
B	Trees of moderate quality whose retention is desirable	Moderate	Mid blue
C	Trees of low quality which could be retained	Low	Grey

5.0: Tree Survey

5.1: General observations

The British Standard BS5837:2012 *Trees in Relation to Design, Demolition and Construction - Recommendations* gives recommendations and guidance of the principals that should be applied during the development process to achieve a satisfactory juxtaposition of trees with structures. With regard to the design issues and the assessment of trees on development sites, BS 5837 recognises in section 5.1.1 that:

“The constraints imposed by trees, both above and below ground (see Note to 5.2.1) should inform the site layout design, although it is recognized that the competing needs of development mean that trees are only one factor requiring consideration. Certain trees are of such importance and sensitivity as to be major constraints on development or to justify its substantial modification. However, care should be taken to avoid misplaced tree retention; attempts to retain too many or unsuitable trees on a site can result in excessive pressure on the trees during demolition or construction work, or post-completion demands for their removal.”

5.2: BS5837 also adds in 5.1.2 that:

“As trees can affect and be affected by many aspects of site operations, during the conception and design process the project arboriculturist should be involved in ongoing review of layout, architectural, engineering and landscape drawings. All members of the design team should be made aware of the requirements for the successful retention of the retained trees and should make provision for these throughout the development process.”

5.3: BS5837 advises that the physical size of trees can: dominate new development and give rise to concern about safety, cause obstruction of light and views, and incite objections about falling leaves and debris. These factors are most important when taking into consideration the juxtaposition of trees and new development, and usually this can only be resolved by allowing sufficient space for the trees or by removing the trees.

5.4: The Trees

For the purpose of this report the trees have been treated as;

- Two individual trees.

5.5: Both trees are mature Lime trees, cat A. They both have some deadwood throughout the crown which is quite normal for the species. Neither have any major defects. They have grown as part of a line of Lime trees along the road. The trees are located within small borders that edge the driveway, as do the other trees in the line. The trees must have grown accustomed to the ground conditions as they appear healthy and vigorous.

5.6: T1 has a tree protection order (TPO) on it; LR010T050.



Fig 3: T1 Lime

Fig 4: T2 Lime

5.7: T2 has been historically pollarded at 5m. Judging by the growth from this point, it was circa 30-40 years ago.

5.8: All other tree information will be found in the Tree Data Table, table 4

6.0: Barriers and Surfaces

6.1: Protective barriers

Barriers for the protection of trees on development sites should be fit for the purpose of excluding construction activity and be appropriate to the type and proximity of the work. In particular, attention should be paid to ensure that such barriers remain rigid and complete during all phases of development. In most instances, barriers should consist of rigid framework comprising vertical post and horizontal rails well braced to resist impacts. An appropriate fence type should then be securely fixed to this framework with clamps or wire. . The protection of the subject trees and their subsequent health and future potential is totally dependent upon all persons operating within the site. Communications are vitally important to ensure that all parties understand the reasons for tree protection and the existence of the barriers.

6.2: It is imperative that these barriers, as specified in British Standard BS 5837 2012 '*Trees in Relation to Design, Demolition and Construction - Recommendations*', should be put up around the retained trees prior to the commencement of any construction operations. It is expected that the erection of tree protection barriers will be conditional on on the approval of a planning application that calls for their use. To avoid any ambiguity the precise location of the tree protective barriers should be agreed on site with the local authority arboricultural officer and then marked out clearly on the ground.

6.3: Location of protective barriers: British Standard BS 5837 advocates the use of "root protection areas" (RPAs), formed by calculating a circle 12x the stem diameter for single-stem trees . For trees with multiple stems one of two calculations should be used

a) For trees with two to five stems, the combined stem diameter should be calculated as follows:

$$\sqrt{(\text{stem diameter } 1)^2 + (\text{stem diameter } 2)^2 + \dots + (\text{stem diameter } 5)^2}$$

b) For trees with more than five stems, the combined stem diameter should be calculated as follows:


$$\sqrt{(\text{mean stem diameter})^2 \times \text{number of stems}}$$

Table 3: example RPA dimensions from BS5837:2012


Single stem diameter mm	Radius of nominal circle m	RPA m ²	Single stem diameter mm	Radius of nominal circle m	RPA m ²
75	0.90	3	675	8.10	206
100	1.20	5	700	8.40	222
125	1.50	7	725	8.70	238
150	1.80	10	750	9.00	255
175	2.10	14	775	9.30	272
200	2.40	18	800	9.60	290
225	2.70	23	825	9.90	308
250	3.00	28	850	10.20	327
275	3.30	34	875	10.50	346
300	3.60	41	900	10.80	366
325	3.90	48	925	11.10	387
350	4.20	55	950	11.40	408
375	4.50	64	975	11.70	430
400	4.80	72	1 000	12.00	452
425	5.10	81	1 025	12.30	475
450	5.40	92	1 050	12.60	499
475	5.70	102	1 075	12.90	519
500	6.00	113	1 100	13.20	547
525	6.30	124	1 125	13.50	573
550	6.60	137	1 150	13.80	598
575	6.90	150	1 175	14.10	625
600	7.20	163	1 200	14.40	652
625	7.50	177	1 225	14.70	679
650	7.80	191	1 250+	15.00	707

6.4: Specification for the tree protection barriers: The default specification for tree protection barriers should normally consist of a vertical and horizontal scaffold framework, well braced to resist vehicle impacts. The vertical tubes should be spaced at a maximum interval of 3m and driven securely into the ground. Onto this framework, proprietary welded mesh panels ('heras') should be securely fixed. Care should be exercised when locating the vertical poles to avoid underground services and, in the case of the bracing poles, also to avoid contact with structural roots. The general specification for the protective barriers is outlined in Fig 10:

Fig5: Specification for protective barriers

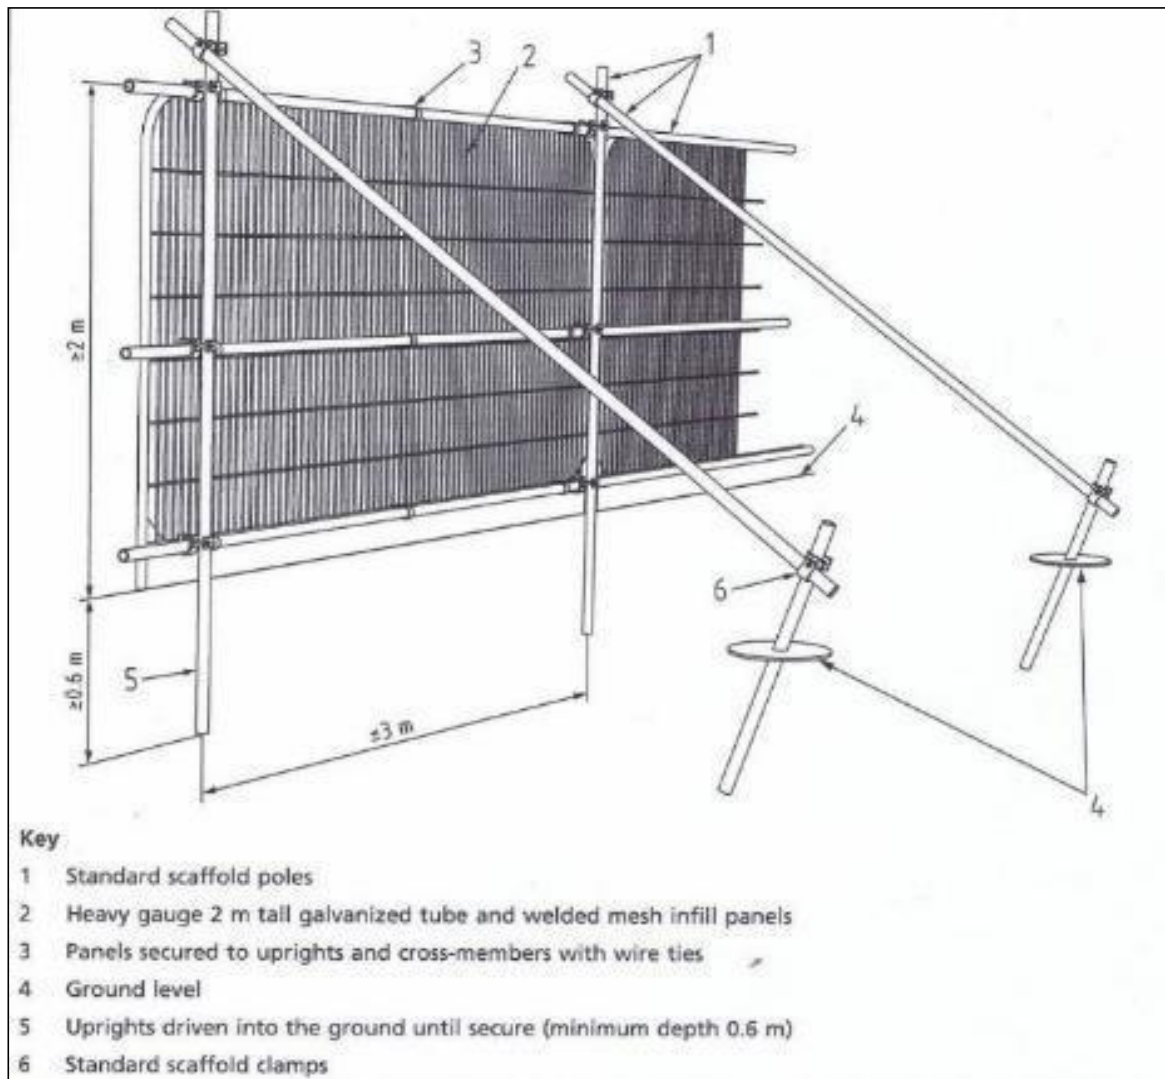

6.5: In this case, the site circumstances may not necessitate the default level of protection and it may be possible to agree an alternative specification with the local planning authority. For example, 2m tall 'Heras' panels on rubber or concrete feet would provide an adequate level of protection from cars, vans, pedestrians and manually operated plant machinery in certain areas. The fence panels could be joined together using anti-tamper couplers, installed so that they can only be removed from inside the fence. The panels should be supported on the inner side by stabilizer struts, which should normally be attached to a base plate secured with ground pins

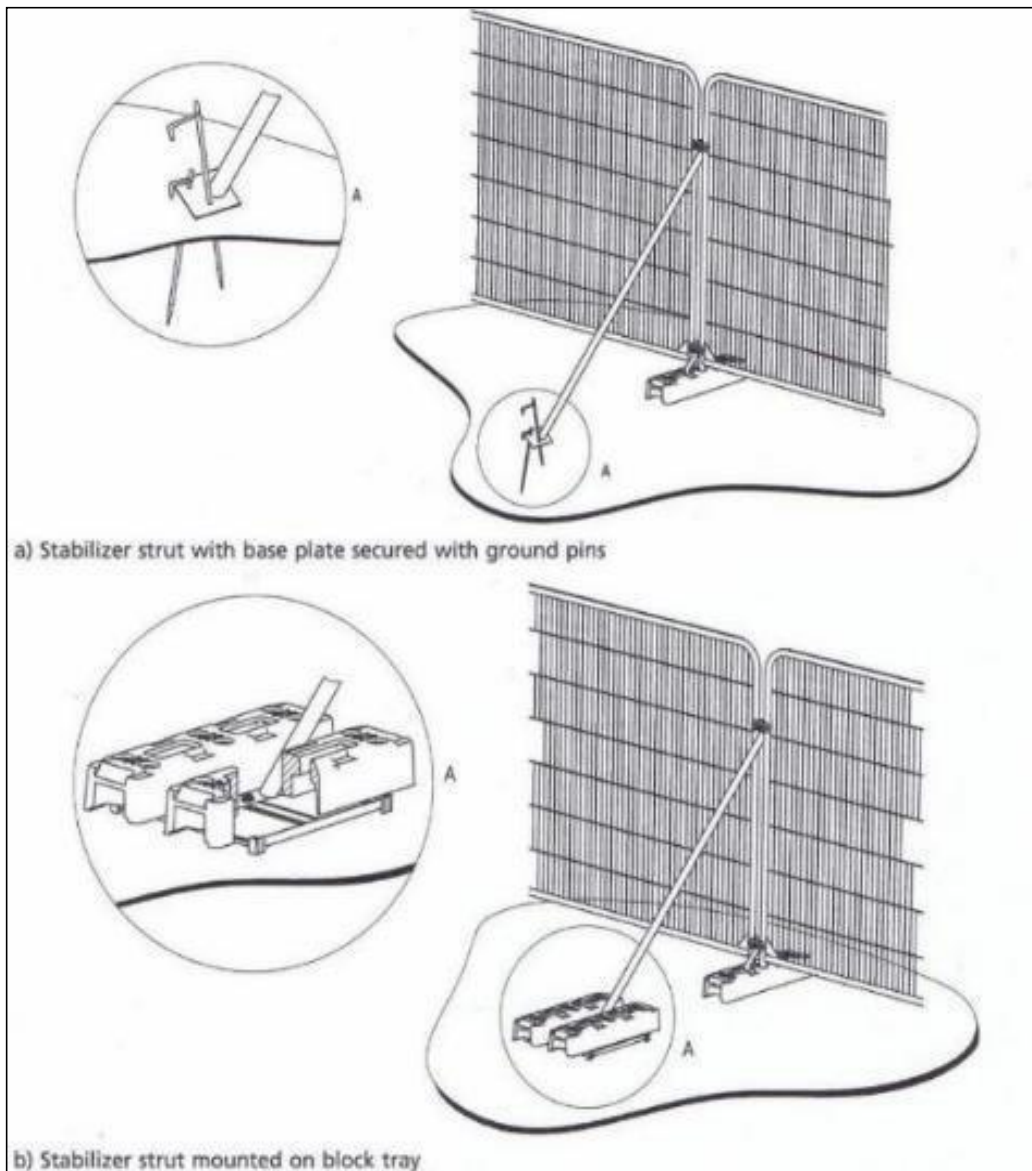

Figures 6a and 6b- Panel support specifications

6.6: Whatever the level of protection utilised, no storage of materials or any construction operations should occur within any of the fenced off areas. Ideally, a notice similar to that shown below should be attached to the barriers.

Figure 7: Example of notice to be erected



6.7: Prohibited Activities

The following activities shall not be carried out under any circumstances:

- a. no fires to be lit on site within 10m of the nearest point of the canopy of any retained tree on or adjacent to the proposal site;
- b. no equipment, signage, fencing etc. shall be attached to or be supported by any retained tree on or adjacent to the application site;
- c. no temporary access within designated RPA without the prior written approval of the LPA;
- d. no mixing of cement, dispensing of fuels or chemicals within 10 metres of the tree stem of any retained tree on or adjacent to the application site;
- e. no soakaways to be routed within the RPA of any retained tree on or adjacent to the application site;
- f. no stripping of topsoil, excavations or changing of levels to occur within the RPA of any retained tree on or adjacent to the application site;
- g. no topsoil, building materials or other to be stored within the RPA of any retained tree on or adjacent to the application site; and
- h. no alterations or variations of the approved works or tree protection schemes shall be carried out without the prior written approval of the district planning authority.

6.8: Methodology - excavation with RPAs


To avoid damage to tree roots, the existing ground levels should be retained within the RPAs of all trees. The ground within the RPAs of the trees should not be disturbed, and the topsoil should remain, however it may, at times, be necessary to carry out small scale excavations such as grass removal for ground protection installation or pipe installation. THIS CAN ONLY BE DONE WITH WRITTEN PERMISSION FROM THE LOCAL AUTHORITY TREE OFFICER AND THE USE OF A SPECIFIC METHOD STATEMENT. Consequently, it will be necessary to undertake any

excavation works within RPAs by hand. As a general rule, tree roots with a diameter of 25 mm or less can be severed cleanly (by use of a handsaw or sharp secateurs) without any detrimental effect to the health and stability to the tree. However, if roots of a diameter greater than 25 mm are encountered, the local authority Arboricultural Officer and/or Arboricultural Consultant should be consulted as to implications their severance would present to the health and stability of the tree. If this method is employed, it would be prudent to prepare a simple method statement based on the enclosed guidance taken from National Joint Utilities Group (NJUG) Publication Volume 4: 2007 '*Guidelines for the Planning, Installation and Maintenance of Utility Apparatus in Proximity to Trees*'.

6.9: Methodology - temporary ground protection within RPAs -

It may be a requirement for new vehicular access across RPA's. Any such access must not result in changes to the existing soil structure with corresponding damage to the health and condition of the tree's root system. Section 9.3 of BS5837:2012 makes provision for such situations by recommending that access/working zones within the protection areas may be acceptable when created by using a combination of barriers and appropriate ground protection: In this instance steel road plates or an alternative system such as 'Groundtrax' should be utilised.

Figure 8- Example special surface

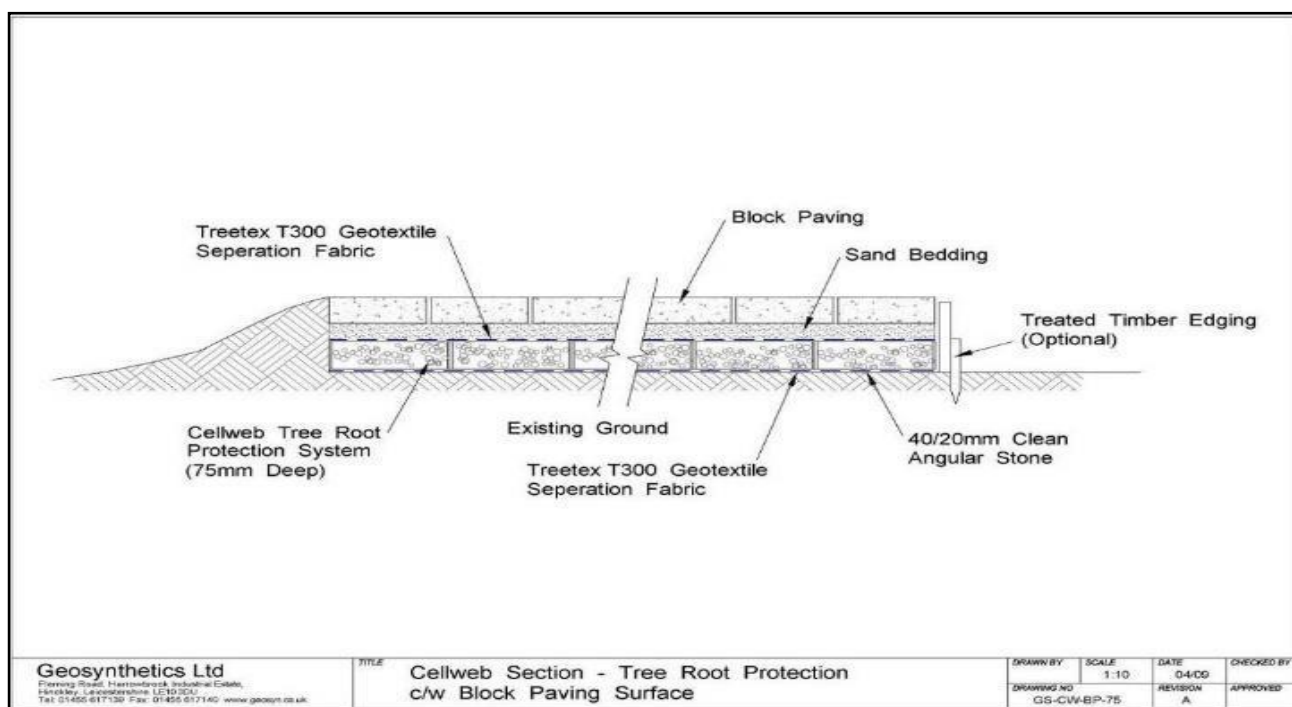

6.10: When utilised correctly with free draining aggregates and a permeable surface, these cellular confinement systems provide a shallow and free draining base that support the passage of vehicles whilst allowing water and oxygen to permeate down to tree roots. This enables a 'no dig' construction technique to be used avoiding the severance of trees roots and preventing soil compaction around tree. This method of surface construction is specifically designed for use within the RPAs of retained trees.

6.11: Please note it is important not to treat the example above as finalised specification. It is provided as an indication of construction methods suitable for use to reduce damage to the root systems of retained trees by soil compaction and direct mechanical injury. It is therefore recommended that a qualified and competent engineer assess the suitability of the recommended specifications and finalise the details prior to commencement of any works.

6.12: Scaffolding

The erection of any scaffolding within the RPA of any tree must be verified with the architect after agreement with the local planning authority. The weight and downward pressure during use of any scaffolding within the RPA of any tree must be supported on bearers of a sufficient size, such as scaffolding boards. The aim of the bearers is to spread the working load across the RPA. The access point for the scaffolding should be outside the RPA.

7.0: Structural Damage

7.1: The potential risk for any direct or indirect structural damage to the proposed development being associated with the trees on and adjacent to the site is dependent on diverse factors, such as: tree species and age, soil type, foundation depth, climate, etc. This complex interaction of tree, soil, building and other influencing factors is so inherently unpredictable, that any accurate prediction of such incidence is impractical without detailed investigation and is outside the remit of this report and it is recommended that a structural engineer be consulted on this matter. Further information on this can be found in the following papers:

- (i) National House Building Council (NHBC) Standards Chapter 4.2 Building near trees,
- (ii) Building Research Establishment (BRE) Digest 63 Soils and foundations: 1,
- (iii) Building Research Establishment (BRE) Digest 64 Soils and foundations: 2,
- (iv) Building Research Establishment (BRE) Digest 67 Soils and foundations: 3,
- (v) Building Research Establishment (BRE) Digest 240 Low-rise buildings on shrinkable clay soils: Part 1,
- (vi) Building Research Establishment (BRE) Digest 241 Low-rise buildings on shrinkable clay soils: Part 2,
- (vii) Building Research Establishment (BRE) Digest 242, Low-rise buildings on shrinkable clay soils: Part 3 and;

Building Research Establishment (BRE) Digest 298 Low-rise building foundations; the influence of trees in clay soil

8.0: Conclusions, arboricultural impact assessment (AIA) and detailed tree protection plan (DTPP)

8.1: Retain and protect all of the trees around the site.

8.2: The root protection areas (RPA) covers nearly all of the driveway however the tree roots have grown accustomed to the compacted ground conditions. As the drive is well used by vehicles it would be of little use trying to protect the RPAs in this area. The areas of none compacted ground are within the narrow borders of the drive and these are planted with hedges and shrubs. These plants should not be removed during construction as their presence is protecting the ground there. There is a small area of ground, to the northeast of T1 shown in green hatch in appendix 3 and in fig 9, where the bins are currently stored. The ground here may not be as compacted/well used. It is recommended to place a double layer of ply board on a 50mm layer of non-compacted sand to prevent compaction by vehicles or building material storage.

8.3: Due to the lack of RPA barriers around the trees, the tree trunks themselves are open to damage from construction traffic, delivery trucks and diggers. Protect the tree trunks by placing ply-board boxes around them from the base up to 2.5m.

8.4: Detailed tree protection Plan

No digging will be carried out within the driveway. Place a 50mm layer of un-compacted sand, to give a level base with a double layer of 8mm ply-board on top in the area behind T1, shown in green hatch in appendix 3, between the concrete area of driveway and the boundary fence. Construct 2.5m high ply-board boxes around the trunks of the trees to protect against vehicle damage. Any wet concrete laid on site will be laid on impermeable membrane to prevent leaching into the soil. Any cement mixing will be done on impermeable sheets to prevent contamination of the soil.

8.5: The proposed side extension is out of the shading area of the trees. It will experience seasonal nuisance and thought should be given to roof design, valleys and flat roofs can collect leaves and gutter guards.



Fig 9: The area behind T1 that requires ground protection



Fig 10: The concrete and hardcore driveway surface.

9.0: Other Considerations

9.1: Trees Subject to Statutory Controls

Certain trees on, adjacent or within the area of the site are may be covered by a Council Tree Preservation Order It will be necessary to check this before work commences The works specified above are necessary for reasonable management and should be acceptable to the local authority. However, tree owners/ managers should appreciate that they may take an alternative point of view and have the option to refuse consent.

9.2: Felling Licence

The felling of trees in the United Kingdom is controlled by the Forestry Commission under the Forestry Act 1967. A 'felling licence' from the Forestry Commission is normally required to fell growing trees, although in any calendar quarter up to 5 cubic metres in any quarter can be felled without licence providing not more than 2 cubic metres are sold. However, certain types of felling are exempt such as the removal of trees that are dead, dying, dangerous and or causing a nuisance.

9.3: Trees outside the Property

Full co-operation and liaison with tree owners will be required to conduct the recommended works on any trees included in this report that are not within the ownership of the applicant. The implications of non-cooperation requires legal interpretation and are beyond the scope of this report. By common law, branches from trees on adjacent properties extending over boundaries can be pruned back to the boundary line without the permission of the owners. However, the material belongs to the tree owner and the same guidance on statutory controls apply, as discussed in section 5.1. These trees may require further permissions, see section 9.1 of this report.

9.4: Implementation of Tree Work

When appointing a tree contractor, only suitably qualified and experienced companies should be used. Always ensure that the contractor carries adequate Public and Products Liability Insurance, along with appropriate Employer's Liability Insurance. The contractor should carry out all tree works to BS 3998:1991 *Recommendations for Tree Work*, as modified by more recent research findings.

9.5: Replacement Trees

Ideally, replacement trees should be planted in mitigation for any being lost and to supplement those existing. For the most effective impact these trees should be 'Extra Heavy Standard Trees' conforming to British Standard 'Nursery Stock BS 3936: Part 1 1992, with a stem girth of 14 to 16 cm at 1m from ground level and a minimum height of 350 cm. They should be secured with twin stakes and cross strut, with tie and flat back spacer. Ideally, an irrigation/aeration pipe should be installed and the soil surface mulched at a radius of 0.5 m from the base of the tree.

9.6: Wildlife

All operations should take account of wildlife needs and be planned to take advantage of weather conditions and season for minimum damage and disturbance.

9.7: Bats

Specific consideration should be given to the possible presence of roosting bats, which are protected under British law by the Wildlife and Countryside Act (WCA) 1981 (as amended), and bats are classified as European Protected Species under The Conservation (Natural Habitats, &c.) Regulations 2010. This makes it an offence to kill, injure or disturb a bat and to destroy any place used for rest or shelter by a bat. The Countryside and Rights of Way Act (CROW) 2000 strengthens protection given by the WCA and covers 'reckless' damage or disturbance to a bat roost.

9.8: Breeding Birds

Any proposed tree removal should be carried out outside the bird nesting season (which runs approximately from March to September inclusive) to avoid adverse impacts to any nests present. Any proposed works that cannot be timetabled out with the bird nesting season must be immediately preceded by a check for active nests immediately prior to works commencing - this should be undertaken by a suitably-experienced bird ecologist. Clearance works should only take place once this ecologist has confirmed that no active bird nests will be affected by the works. If active nests were found then working restrictions would be put in place until all chicks had fledged. All wild birds and their nests, whilst in use, are protected under the WCA 1981 (as amended) from harm or destruction during the nesting season.

9.9: Future considerations

The remaining trees should be inspected on a regular basis by a qualified arboriculturist. Trees are living organisms whose health and condition can change rapidly. The conclusions and recommendations of this report are valid only for a period of one year. This period of validity may be reduced in the case of any change in conditions to, or in proximity to, the tree

10.0: Bibliographical References

Arboricultural Practice Note 12: (2007) *Through the Trees to Development*. Arboricultural Advisory and Information Service.
ISSN 1358-8249

British Standard BS 3998 : (2010) *Tree Work-Recommendations*. ISBN 978-0-580-53777-6

British Standard BS 5837: (2012) *Trees in Relation to Construction*.
ISBN 978 0 580 69917 7

Health and Safety Executive (revised 2006) *Essentials of Health and Safety at Work*. HSE Books. ISBN 978- 0-717-66179-4

Hundt L (2012) *Bat Surveys: Good Practice Guidelines*, 2nd Edition, Bat Conservation Trust ISBN-13:9781872745985

Lonsdale, D. (1999) *Principles of tree hazard assessment and management*, Research for amenity trees No. 2. HMSO, London.
ISBN 0-11-753355-6

Mattheck, C. and Belier, H. (1994) *The body language of trees*. Research for amenity trees No. 4. HMSO, London. ISBN 0-11-753067-0

Mynors C. (2002) *The Law of Trees Forests and Hedgerows*. Sweet and Maxwell ISBN 0-421-590 408

National Tree Safety Group (2011) *Common sense risk management of trees*. The Forestry Commission, Edinburgh. ISBN 978-0-85538-840-9

Planning Practice Guidance - *Tree Preservation Order and trees in conservation areas* - 2014

Shigo, A. L. (1989) *A new tree biology*. Shigo and Trees Associates, Durham, New Hampshire. ISBN 0-943563-04-6


Stouts R. G. and Winter T. G. (1994) *Diagnosis of ill-health in trees*, Research for amenity trees No. 2. HMSO, London. ISBN 0-11-752919-2

Watson, G. and Green T. (2011) *Fungi on trees*. Arboricultural Association, Stonehouse, Gloucestershire. ISBN 978-0-900978-55-5


Table 4: Tree Data Table

Tree ID	Tree Type	Maturity	Height (m)	Height and direction of first significant branch (m)	Stem dia (mm)	Average Spread (m)	Canopy height (m)	Crown	Stem	Category	Life Expectancy	Phys Condition	Category 1	Comment
T1	Lime	Mature	18	5s	610	4	3	Fair	Fair	A	>10 yrs	Fair	Protection	Part of a line of limes. Growing in a small border. Some deadwood throughout the crown. Drive way is part concrete, part hardcore, this is well established
T2	Lime	Mature	18	4e	750	5	3	Fair	Fair	A	>10 yrs	Fair	Protection	Part of a line of limes. Growing in a small border. Some deadwood throughout the crown. Drive way is part concrete, part hardcore, this is well established. Tree has been historically pollarded at 4m, over 30 years ago


Appendix 1: Tree location Plan.

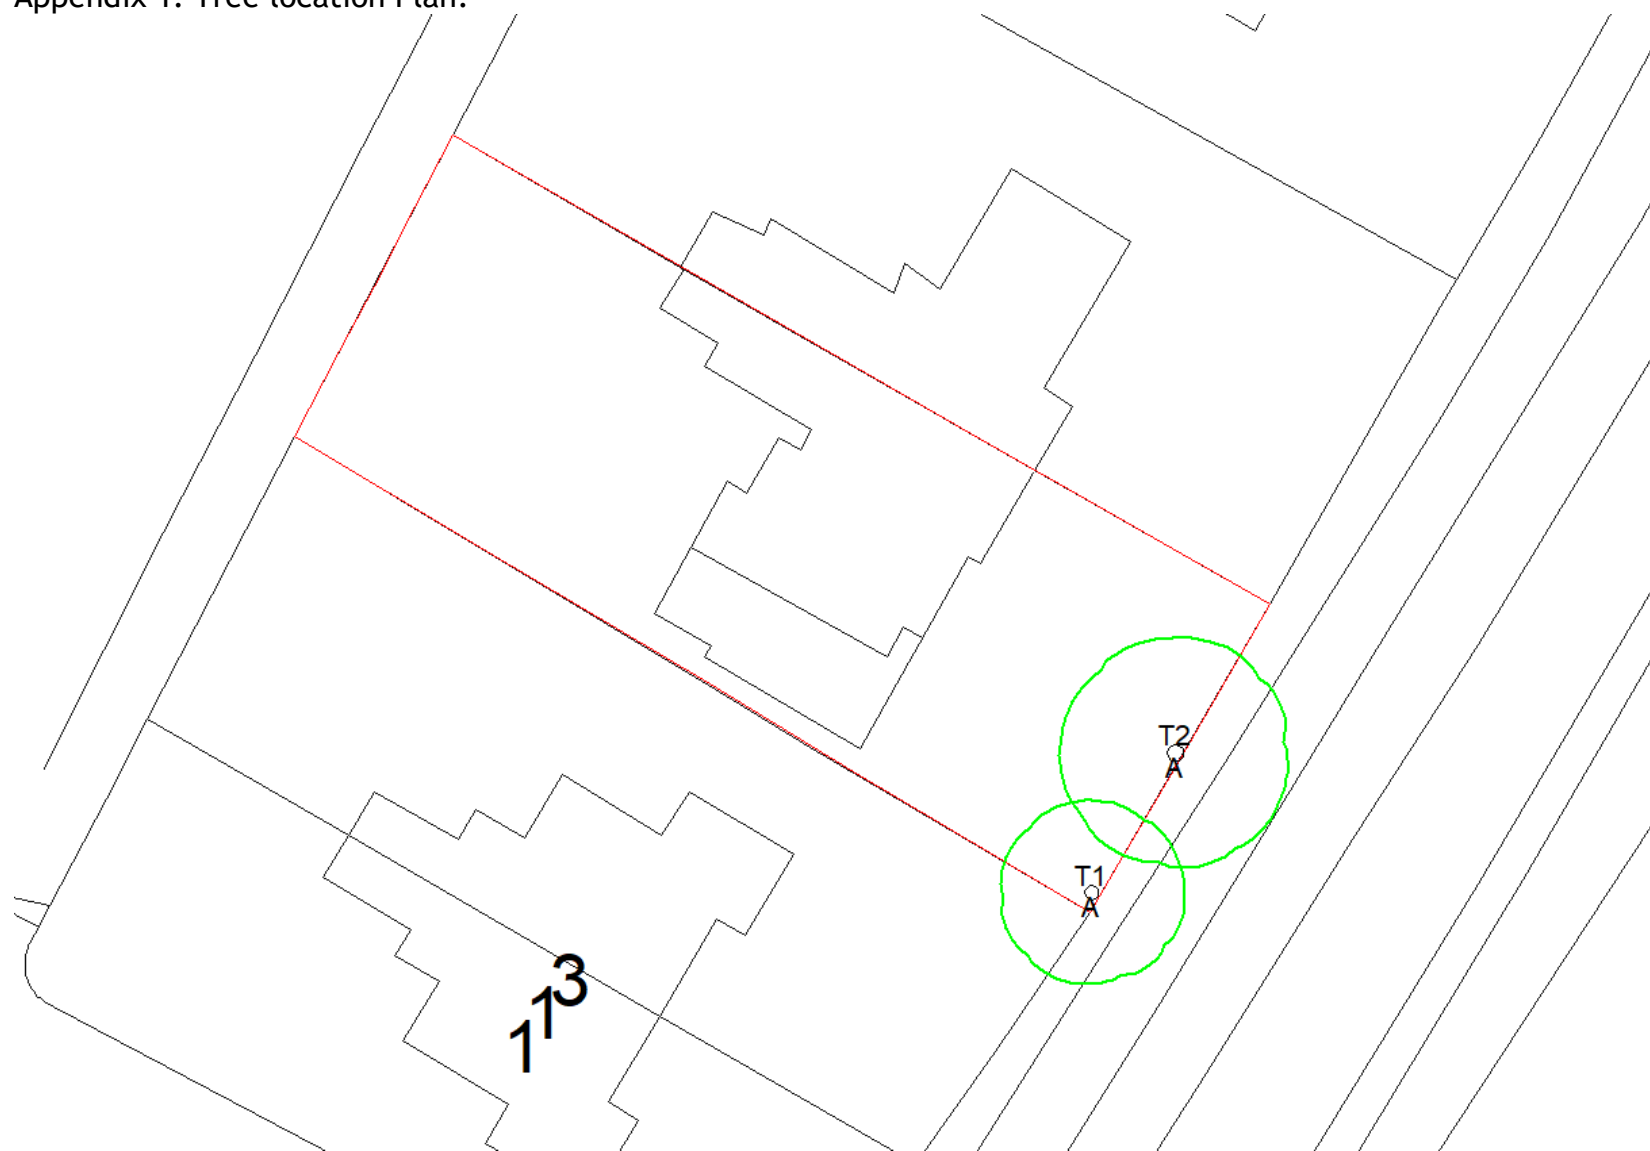

Appendix 2: Root protection areas (RPA) shown in grey hatch

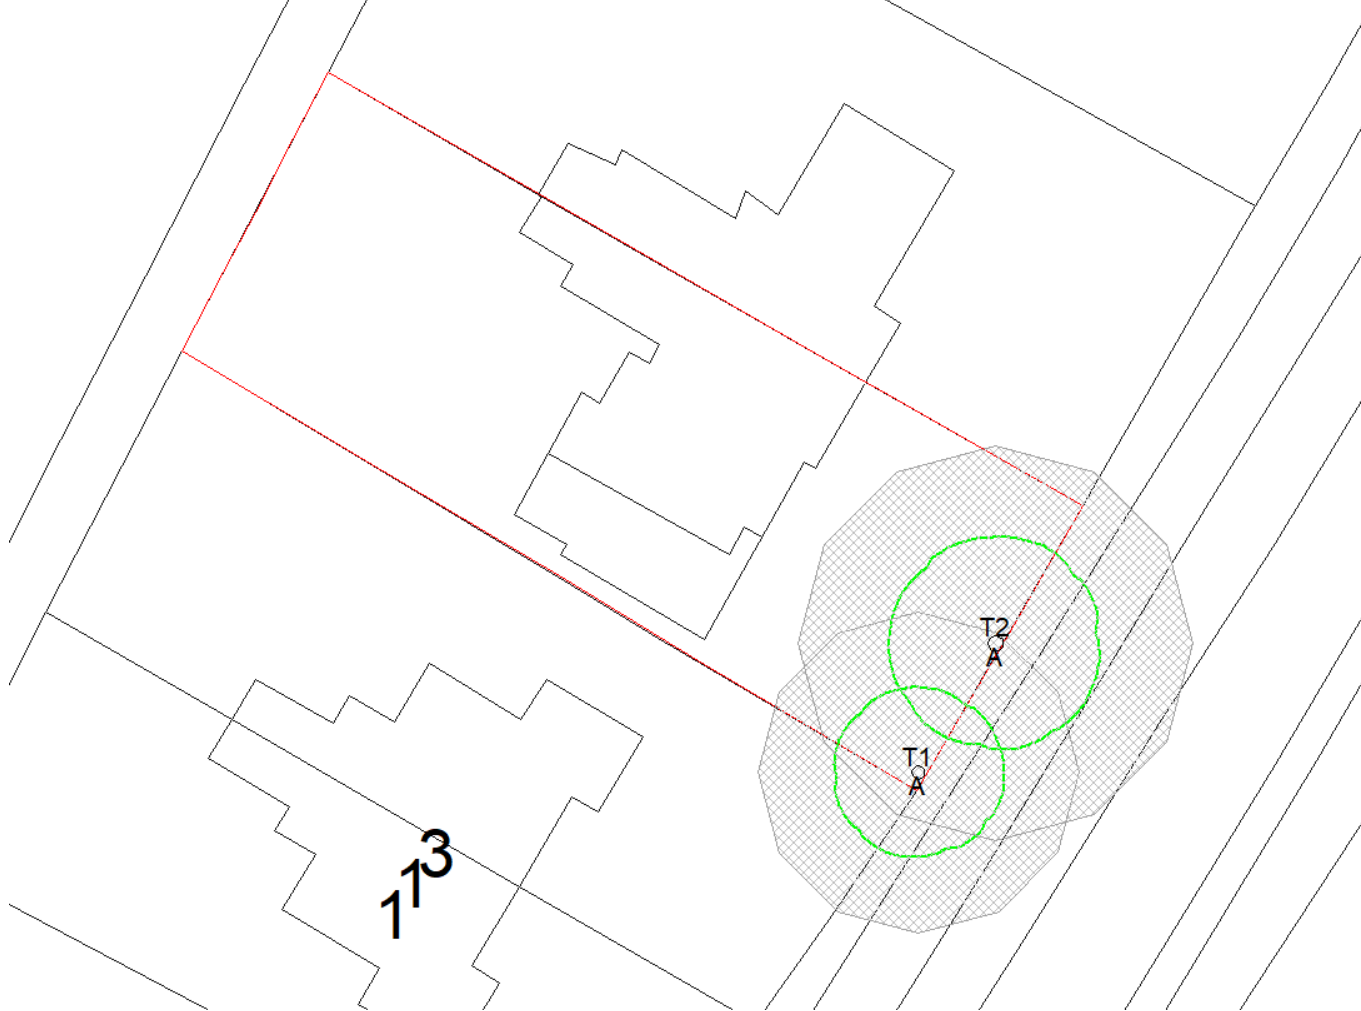

Appendix 3: Ground protection shown in green hatch

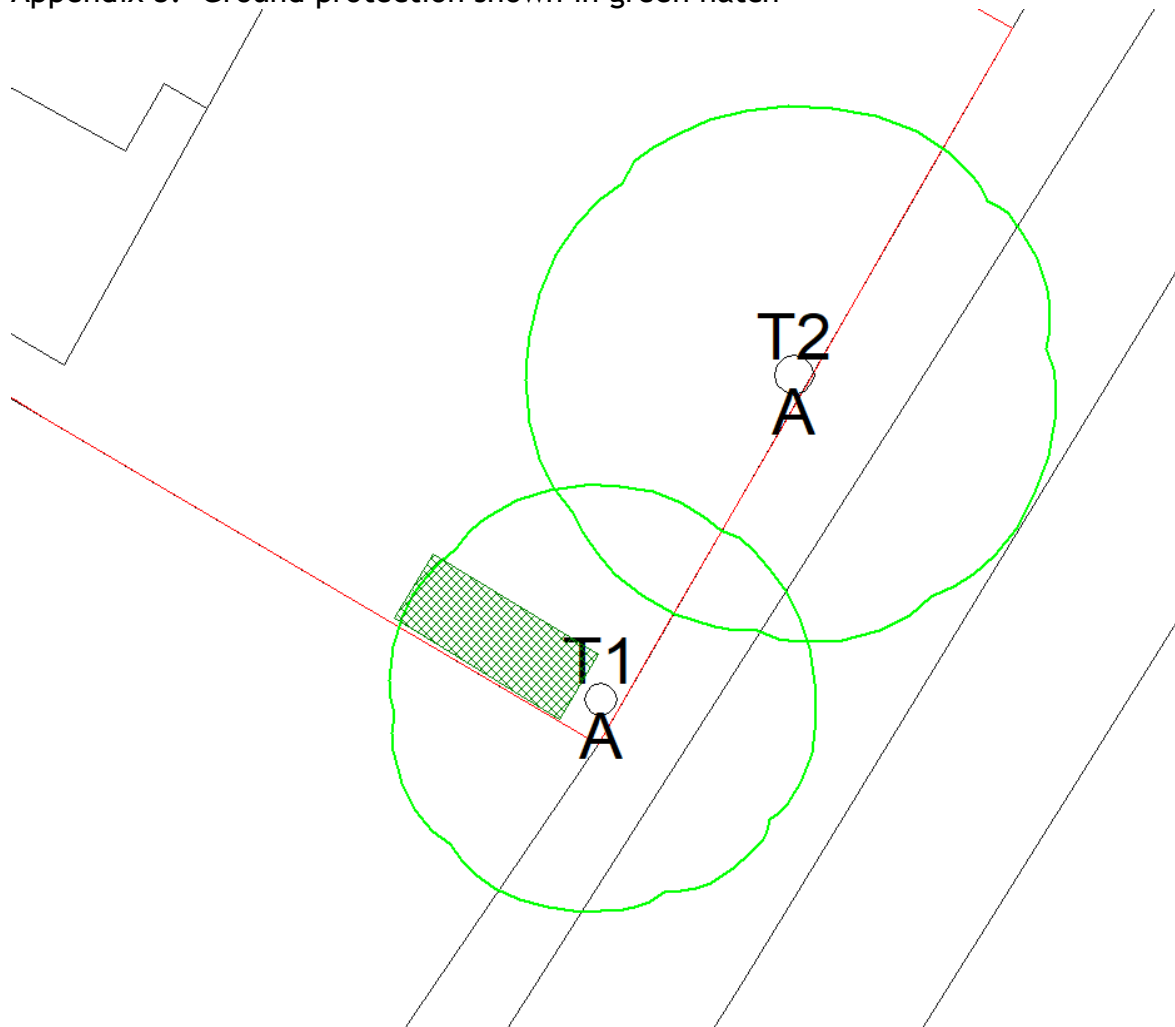

Appendix 4: Tree shading

