



FFW7 FLUSH FITTING
CASEMENT - ELEVATION
SCALE 1:10




FFW7 FLUSH FITTING
CASEMENT - SECTION
SCALE 1:10

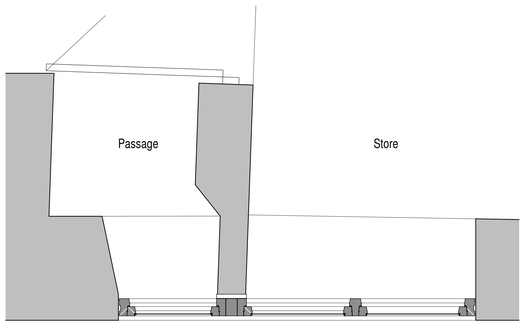



FFW7 FLUSH FITTING
CASEMENT - PLAN
SCALE 1:10

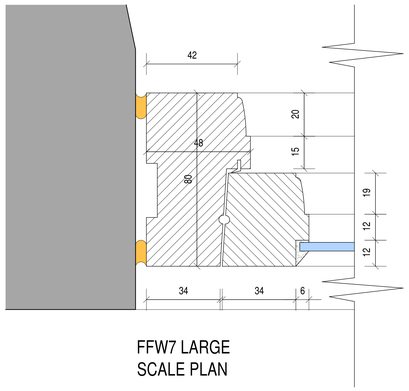

FFW7 LARGE
SCALE PLAN

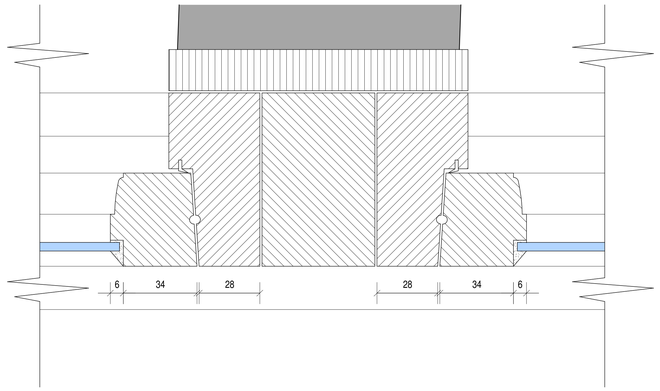

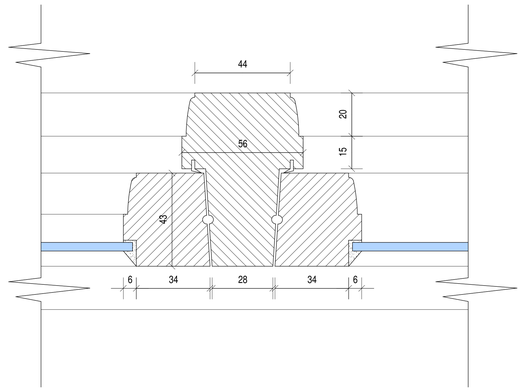

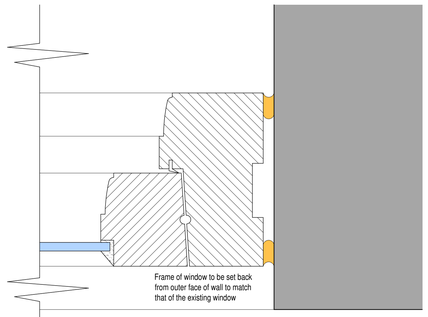

Mastic sealant to all edged

80 x 45mm timber head with 25 x 5mm weather groove, rebated for casement, including neoprene wiper weather strip to inner rebate as appropiate.

43 x 40mm timber casement top frame

43 x 16mm ovolo profiled timber glazing bars


4mm toughened clear glass held in place with linseed oil putty

43x 65mm timber casement bottom rail

80 x 56mm timber cill with 25 x 5mm weather grove on bottom edge.
Rebated for casement, including neoprene wiper weather strip to inner rebate as appropiate.

Existing internal cill to remain

Code 4 lead apon treated with patination oil on mortar bed with front edge chamfered to prevent ponding at cill level

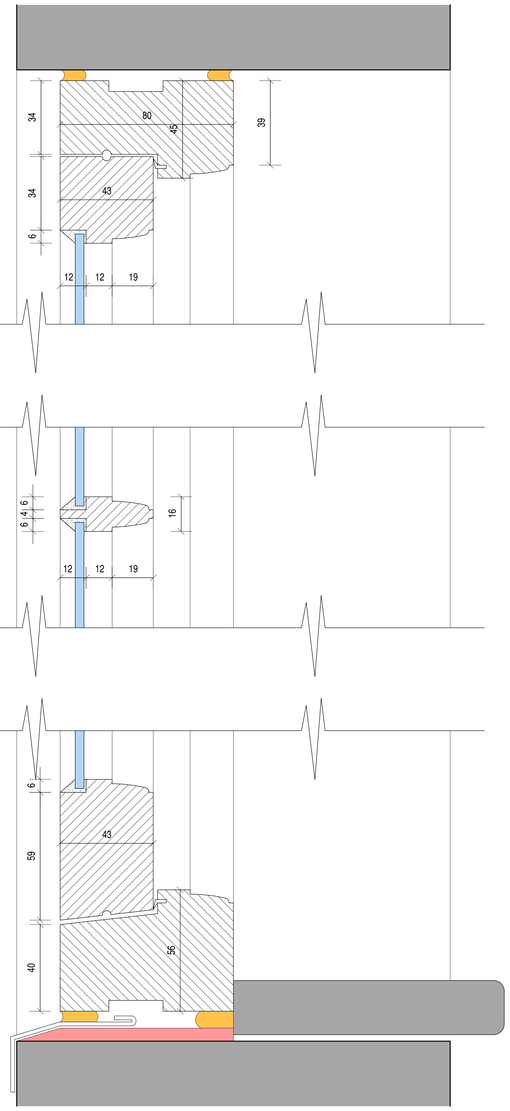

FFW7 LARGE
SCALE SECTION

NOTES -
All sizes shall be measured on site by the manufacturer.
Check on site prior to commencement.
These details are to form part of the proposal for drawing ref: 2021-2638-02
(always refer to the latest amended drawing).

Utile or other sustainable hardwood to be used.

3 coat paint system to be used, white colour finish.

Hardware: latches with black iron monkey tail and casement stays with scew down sliding bar

All mouldings to be Ovola style.

scale bar @ 1:10

scale bar @ 1:1

MR & MRS BEBINGTON

ALTERATIONS TO LISTED
BUILDING AT
WALL HILL MANOR FARM,
RUSHTON SPENCER,
MACCLESFIELD,
SK11 0RS

WINDOW DETAILS
FFW7
SHEET 2

Date	Sheet	Scale
NOV 2021	A0	1:1 + 1:10
Drg No	Rev.	Drawn
2021-2638-04	B	NAW

A - 18/11/2021 AMENDED TO SUIT MEL MORRIS REQUIREMENTS
B 22/11/2021 LARGE SCALE DETAILS INCREASED IN SCALE

SAMMONS Architectural LIMITED
10 Cawdry Buildings, Fountain Street, Leek. ST13 6JP
Telephone: 01538 386002
E-mail: info@sammonsltd.co.uk
Web: www.sammonsltd.co.uk

This drawing is copyright.
All dimensions must be checked prior to commencement.