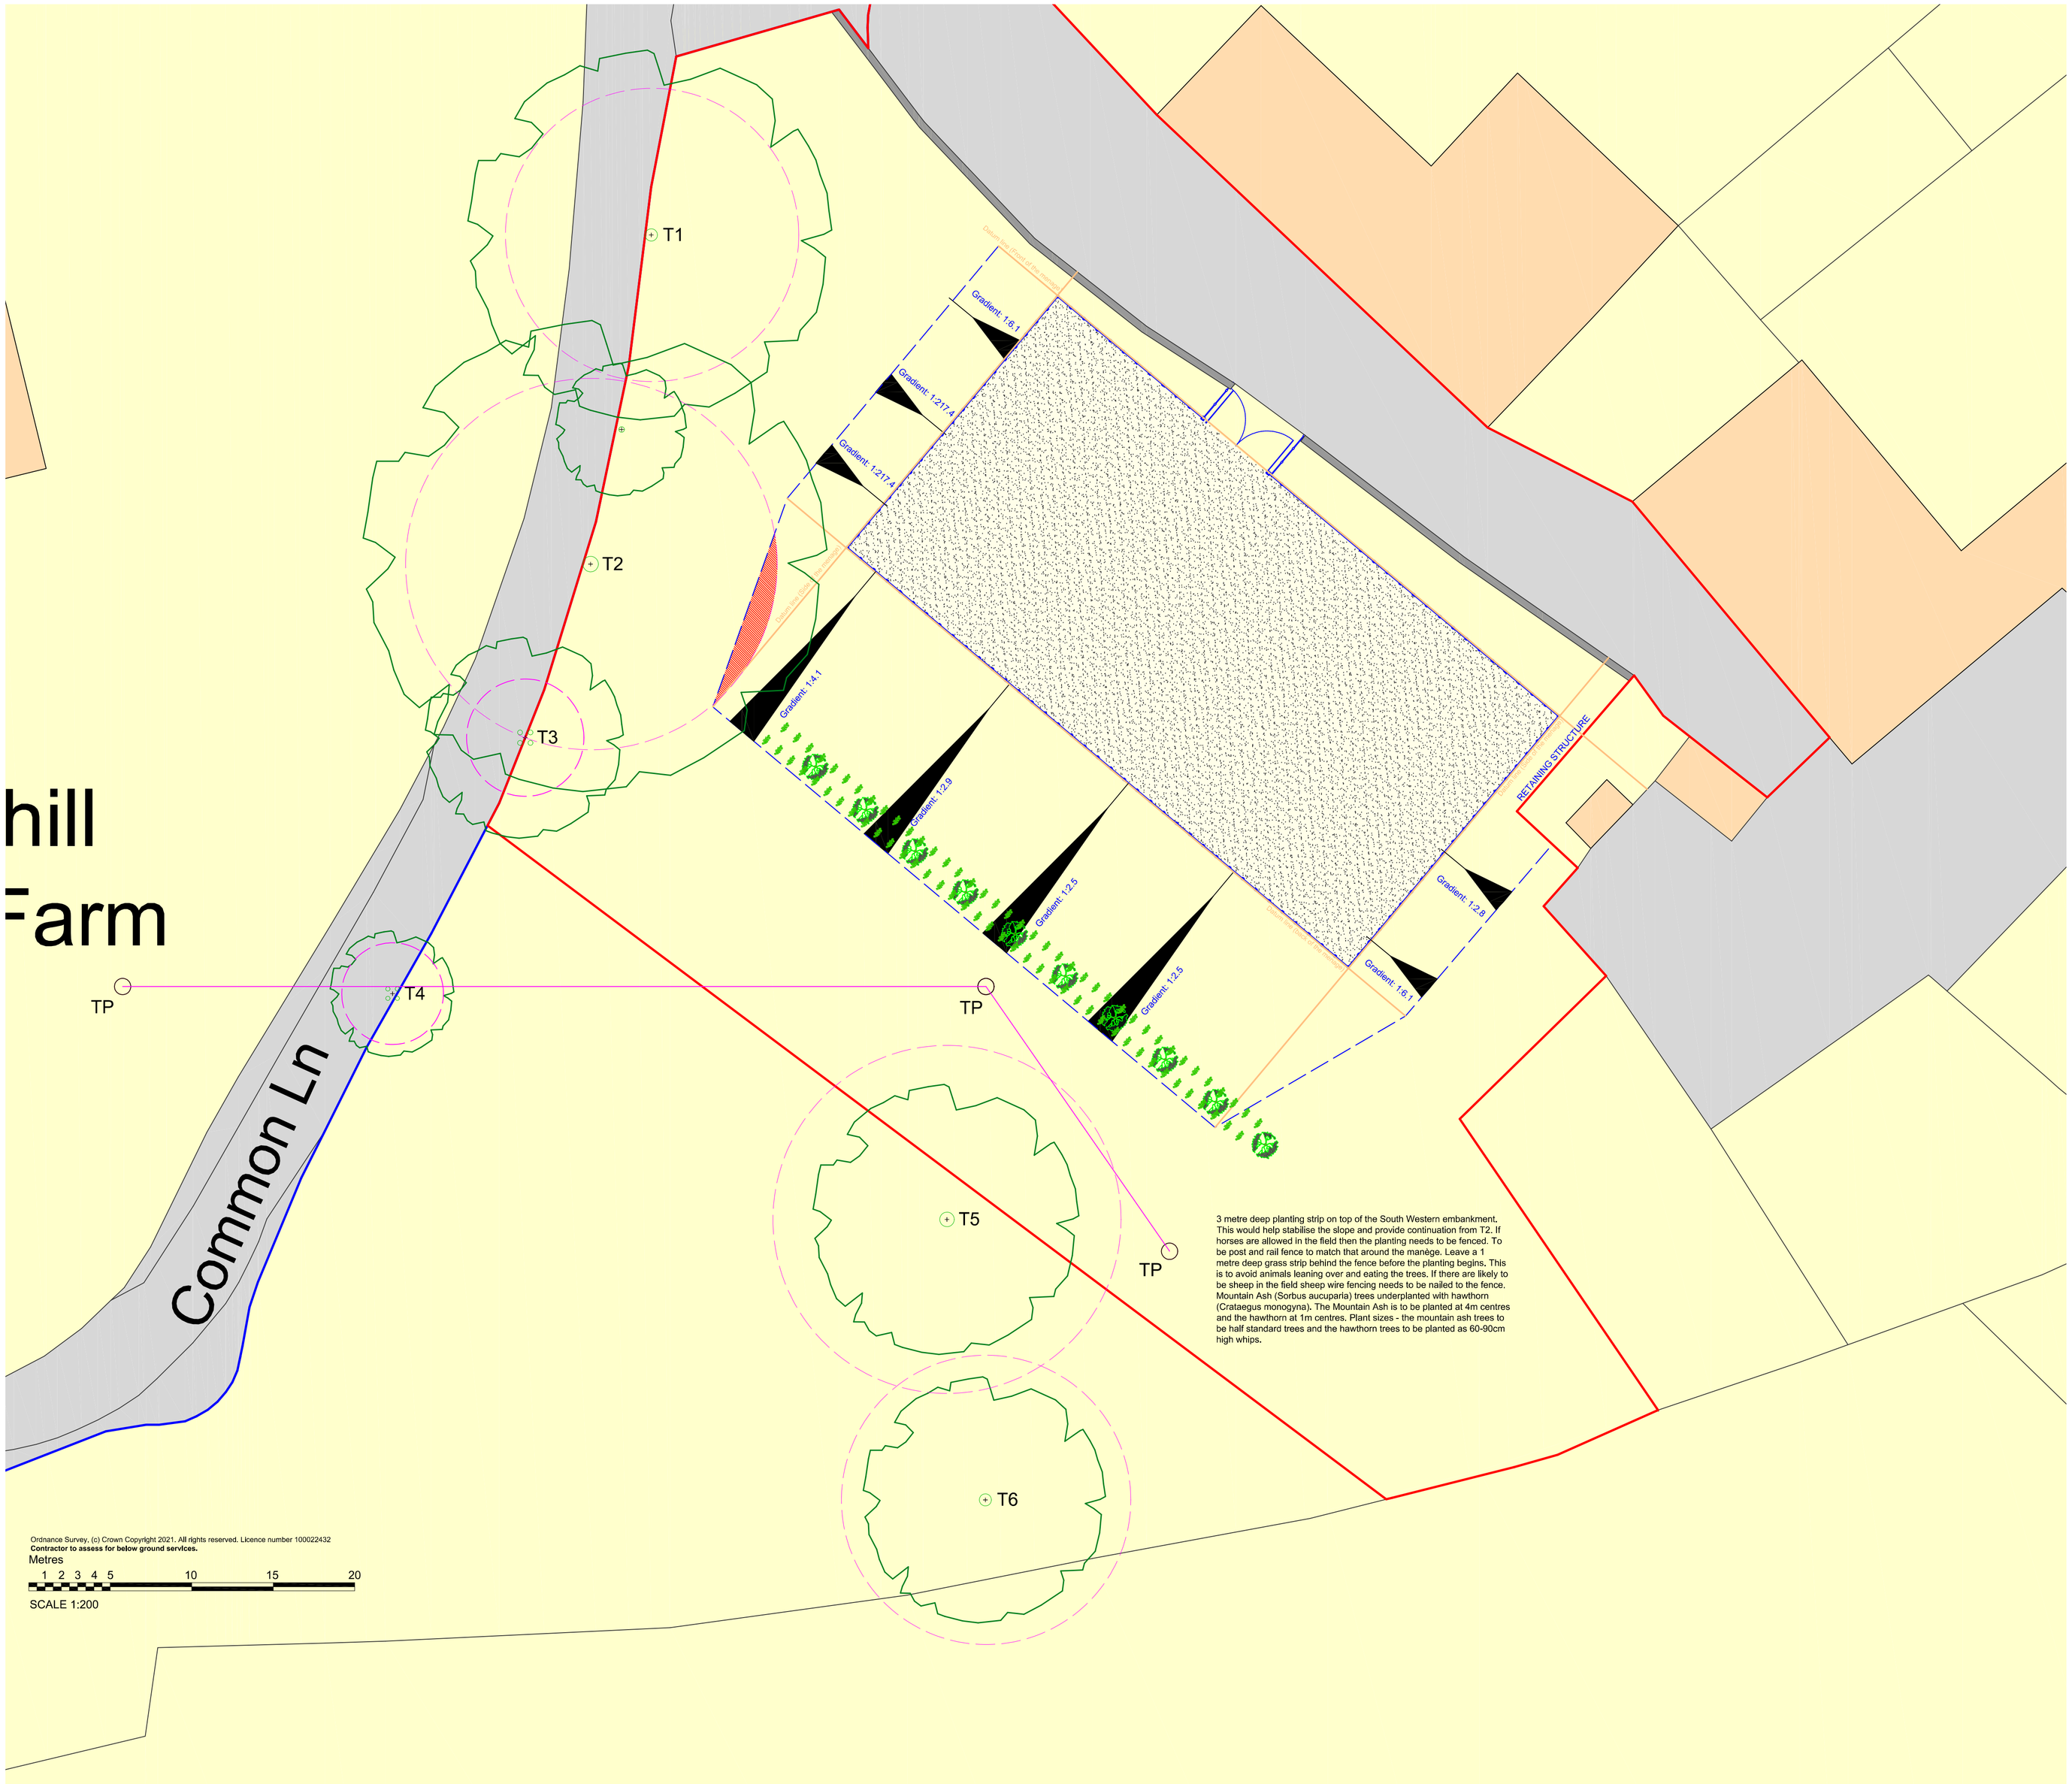


3 metre deep planting strip on top of the South Western embankment. This would help stabilise the slope and provide continuation from T2. If horses are allowed in the field then the planting needs to be fenced. To be post and rail fence to match that around the manège. Leave a 1 metre deep grass strip behind the fence before the planting begins. This is to avoid animals leaning over and eating the trees. If there are likely to be sheep in the field sheep wire fencing needs to be nailed to the fence. Mountain Ash (Sorbus aucuparia) trees underplanted with hawthorn (Crataegus monogyna). The Mountain Ash is to be planted at 4m centres and the hawthorn at 1m centres. Plant sizes - the mountain ash trees to be half standard trees and the hawthorn trees to be planted as 60-90cm high whips.

Ordnance Survey, (c) Crown Copyright 2021. All rights reserved. Licence number 100022432

Contractor to assess for below ground services.

Metres

1 2 3 4 5 10 15 20

SCALE 1:200

N

DBD Architectural Consultancy Ltd ©2022

1. Copyright is vested with DBD Architectural Consultancy Ltd.

2. All dimensions to be checked on site before proceeding.

3. Contractor to check/adjust dimensions of new work to suit existing conditions.
Do not assume existing structure or details are plumb, square or level.

4. Contractor must notify the architect of any discrepancies before proceeding.

5. All drawings to be read in conjunction with all other consultants drawings and specs.

Rev	Date	Description
A	17.01.22	Additional Information Included

DBD Architectural Consultancy

DBD Architectural Consultancy Ltd
50 Broad Street, Leek,
Staffordshire, ST13 5NS
01538 383118
mail@dbdconsultants.co.uk
www.dbdconsultants.co.uk

Client
L Reeves
Broadhurst Farm
Waterhouses
St10 3LQ

Project
Construction of menage

Title
Tree Plan

Status: Planning		
Size: A1	Date: 16.12.21	Job No: 2155
Scale: 1:200		

Drawing Number
PL 16A