
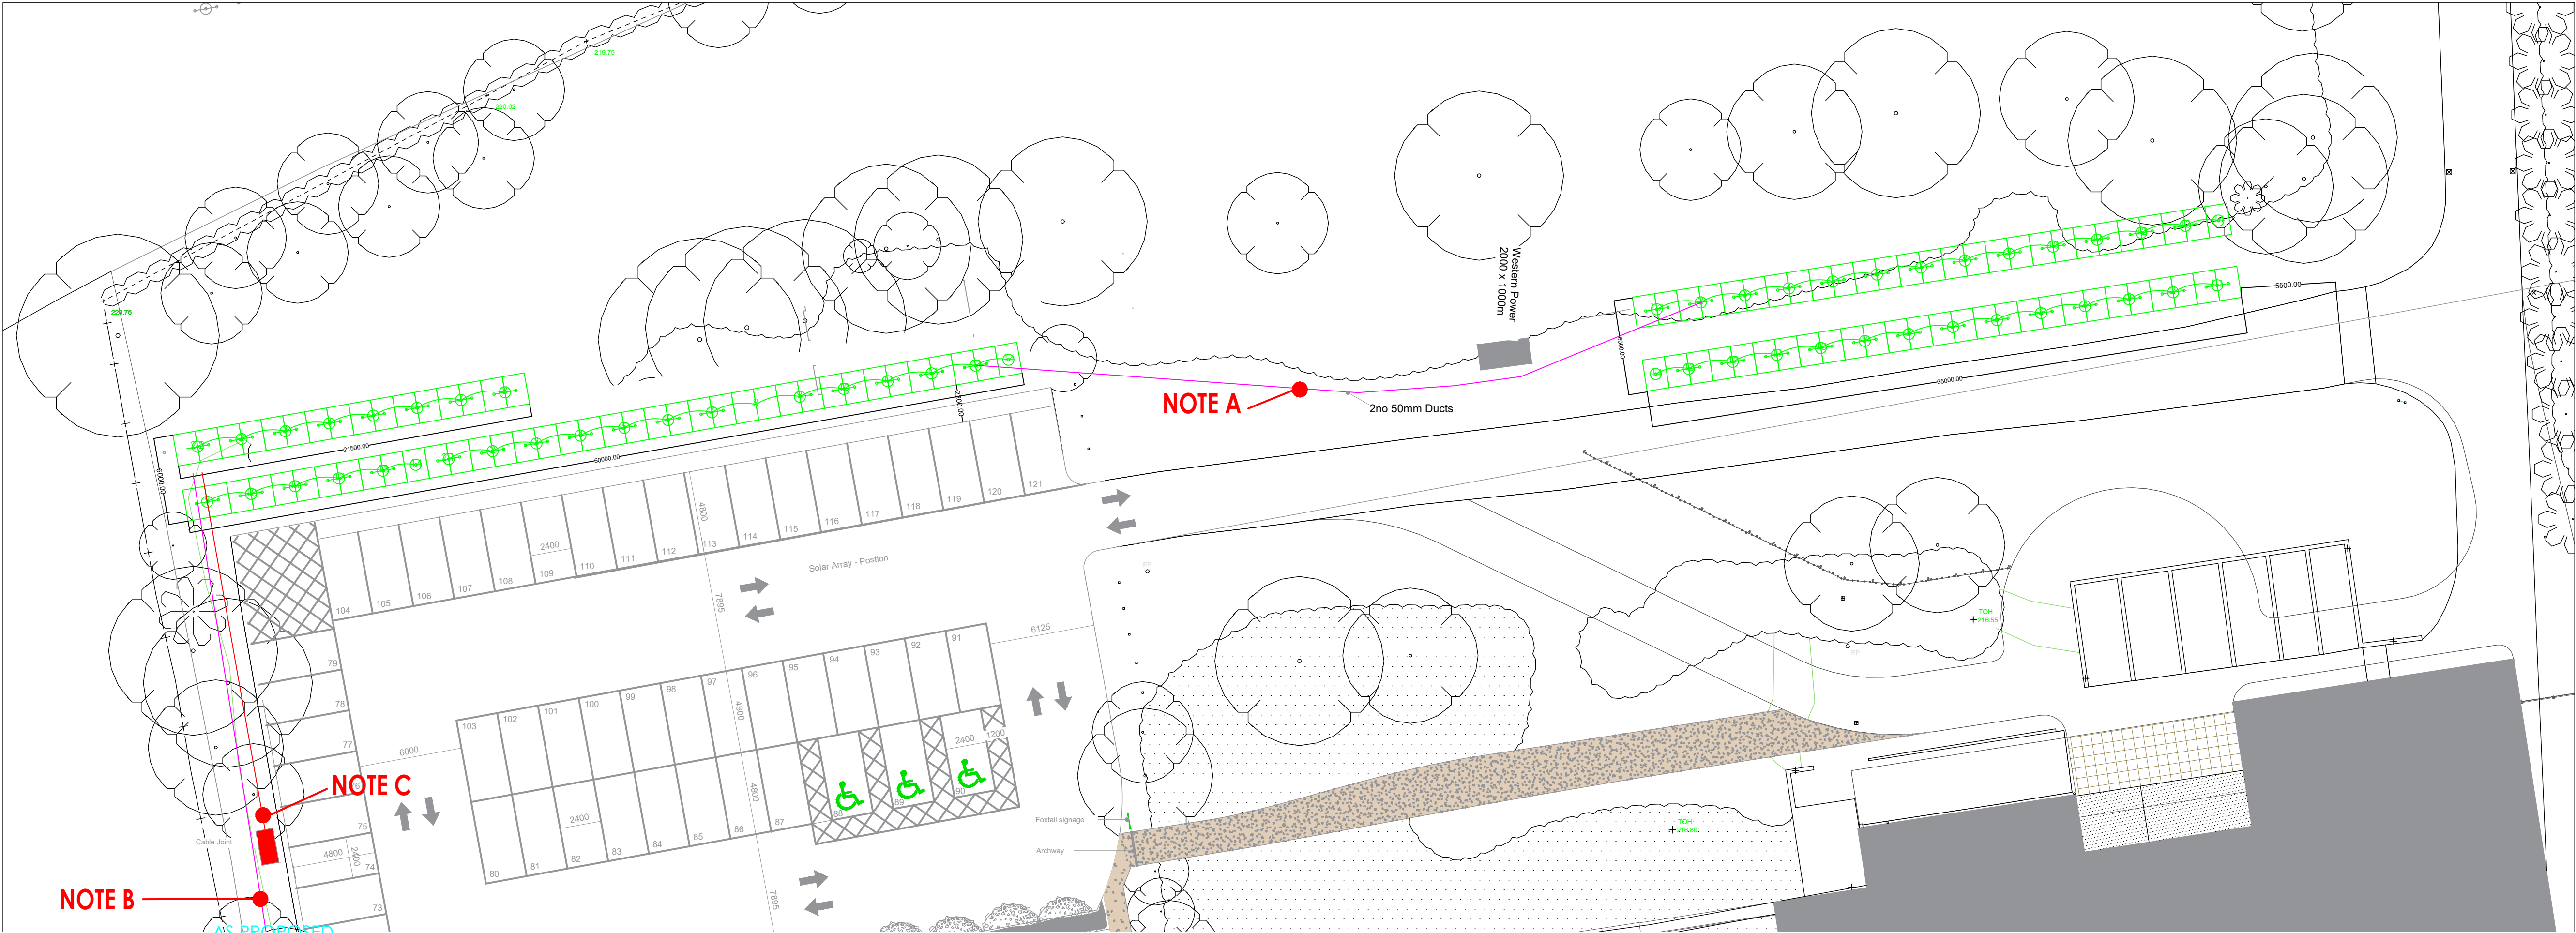
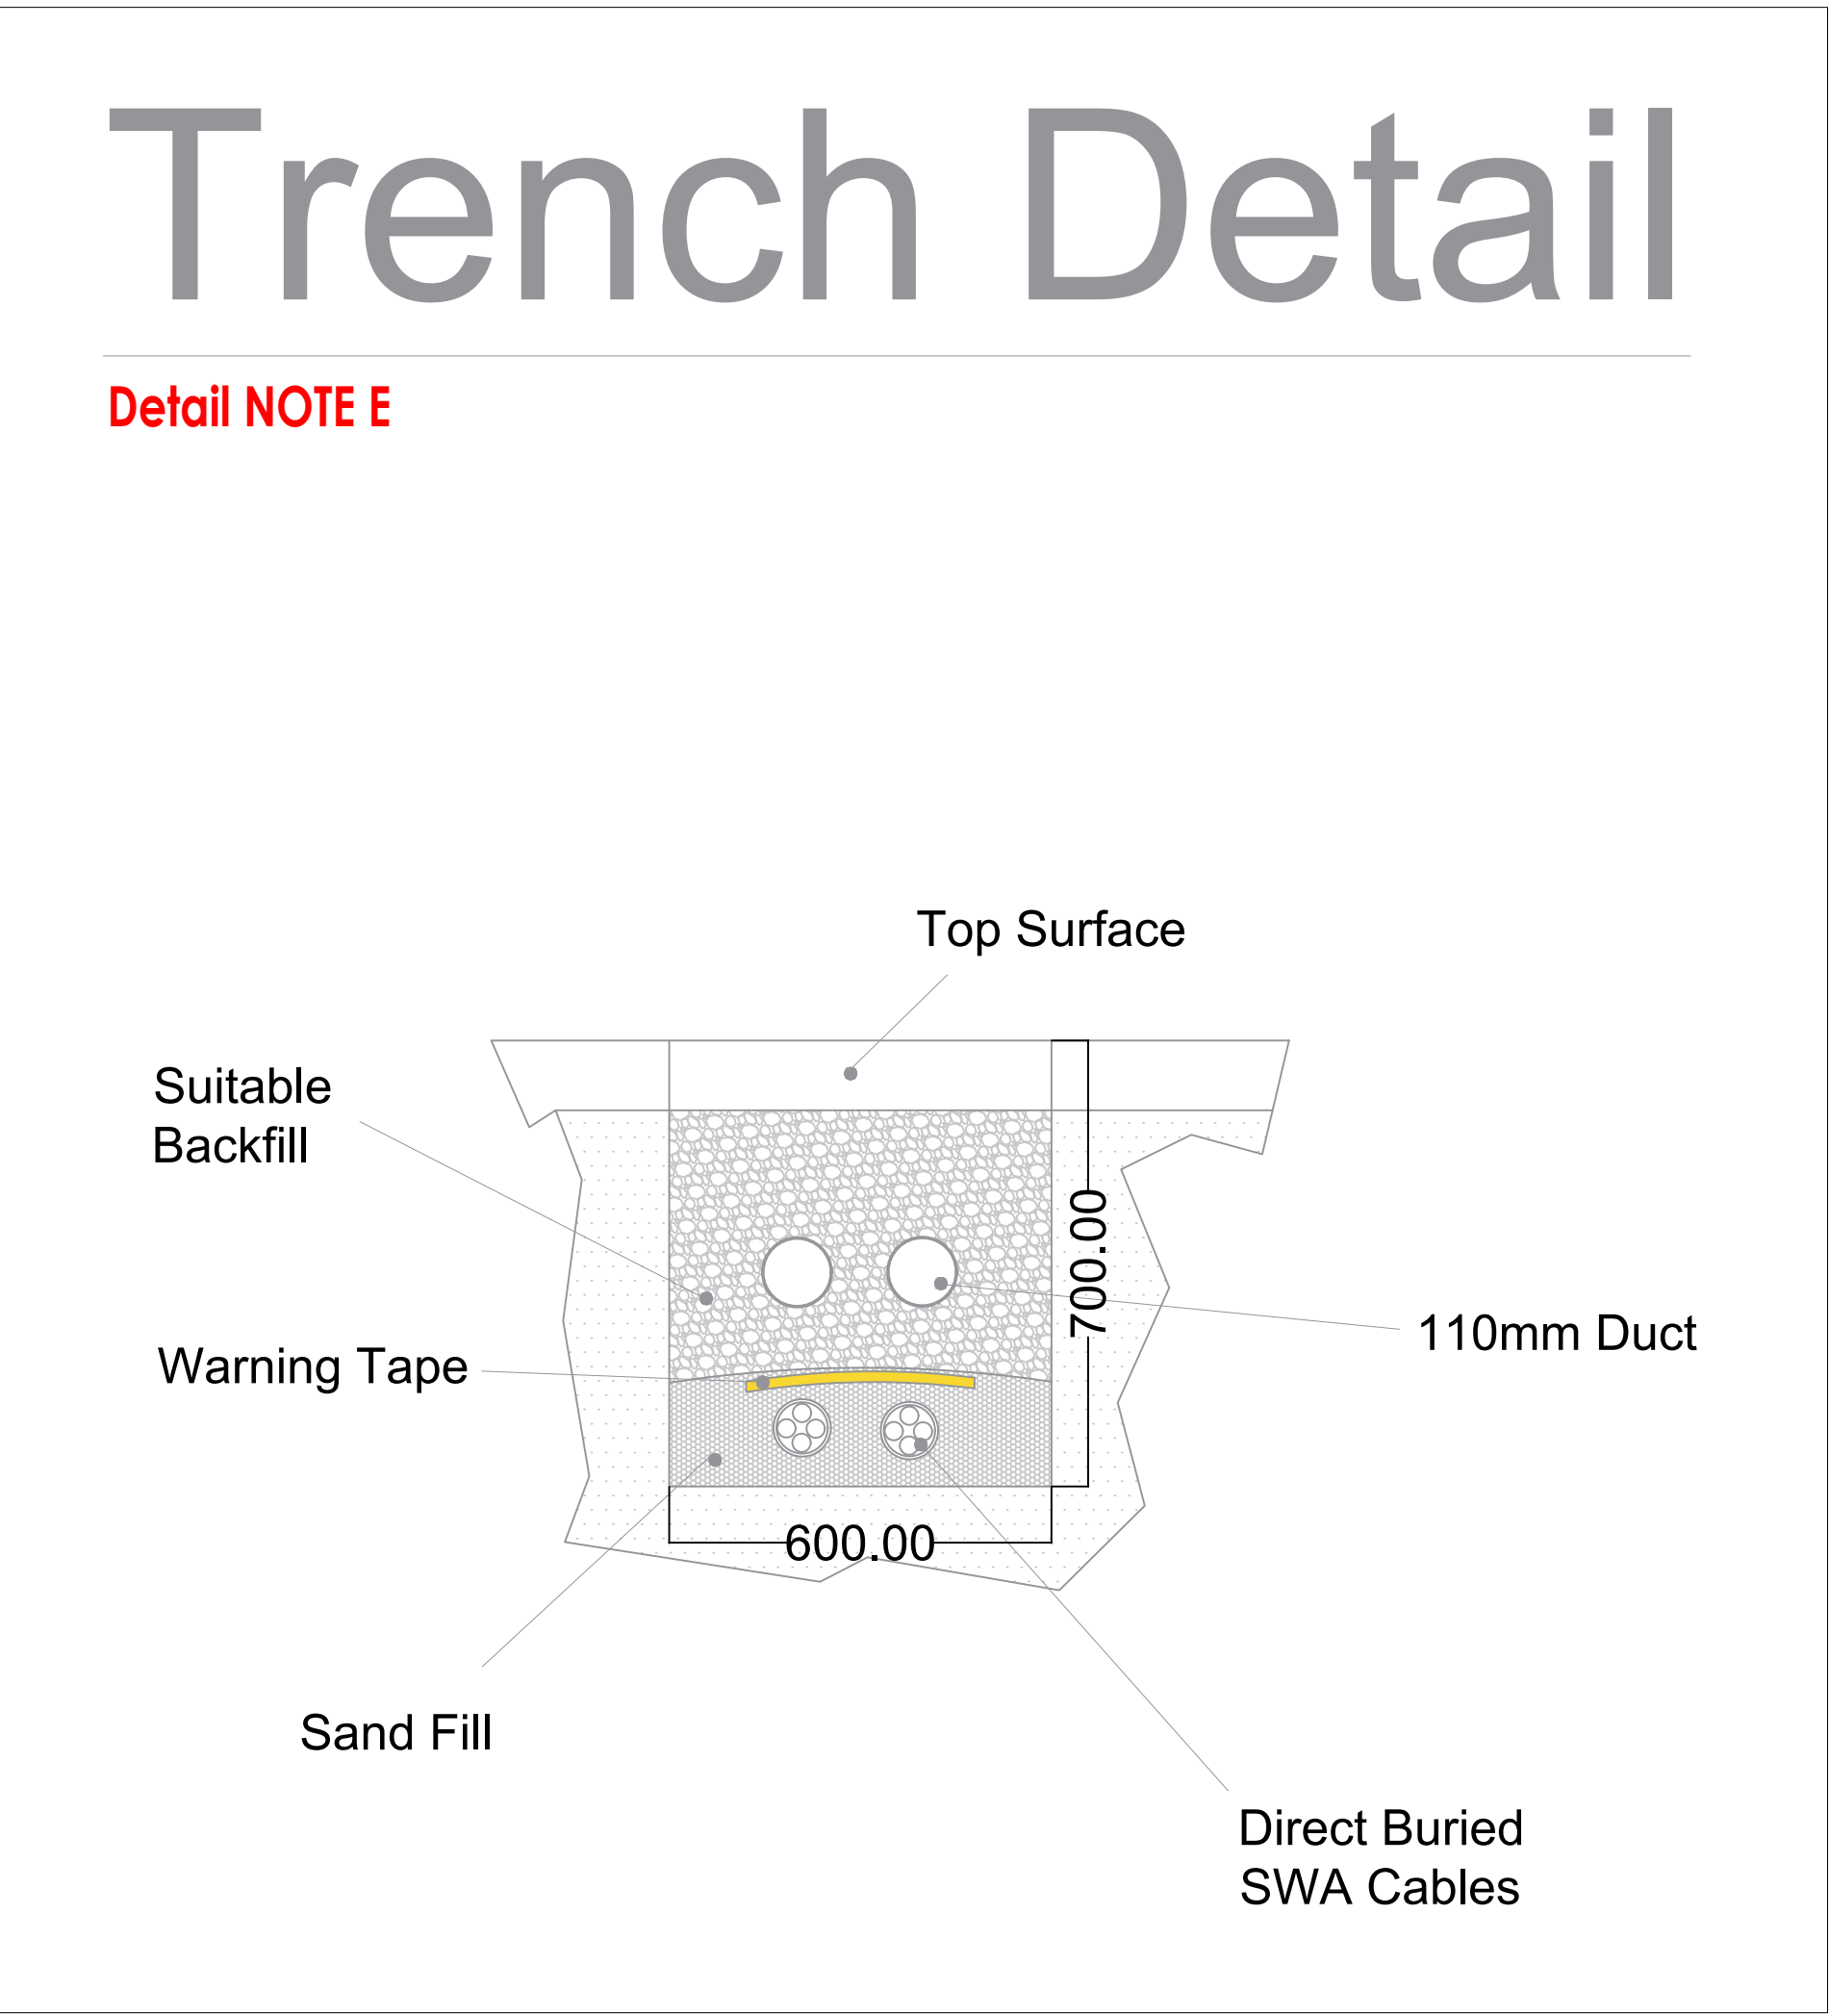


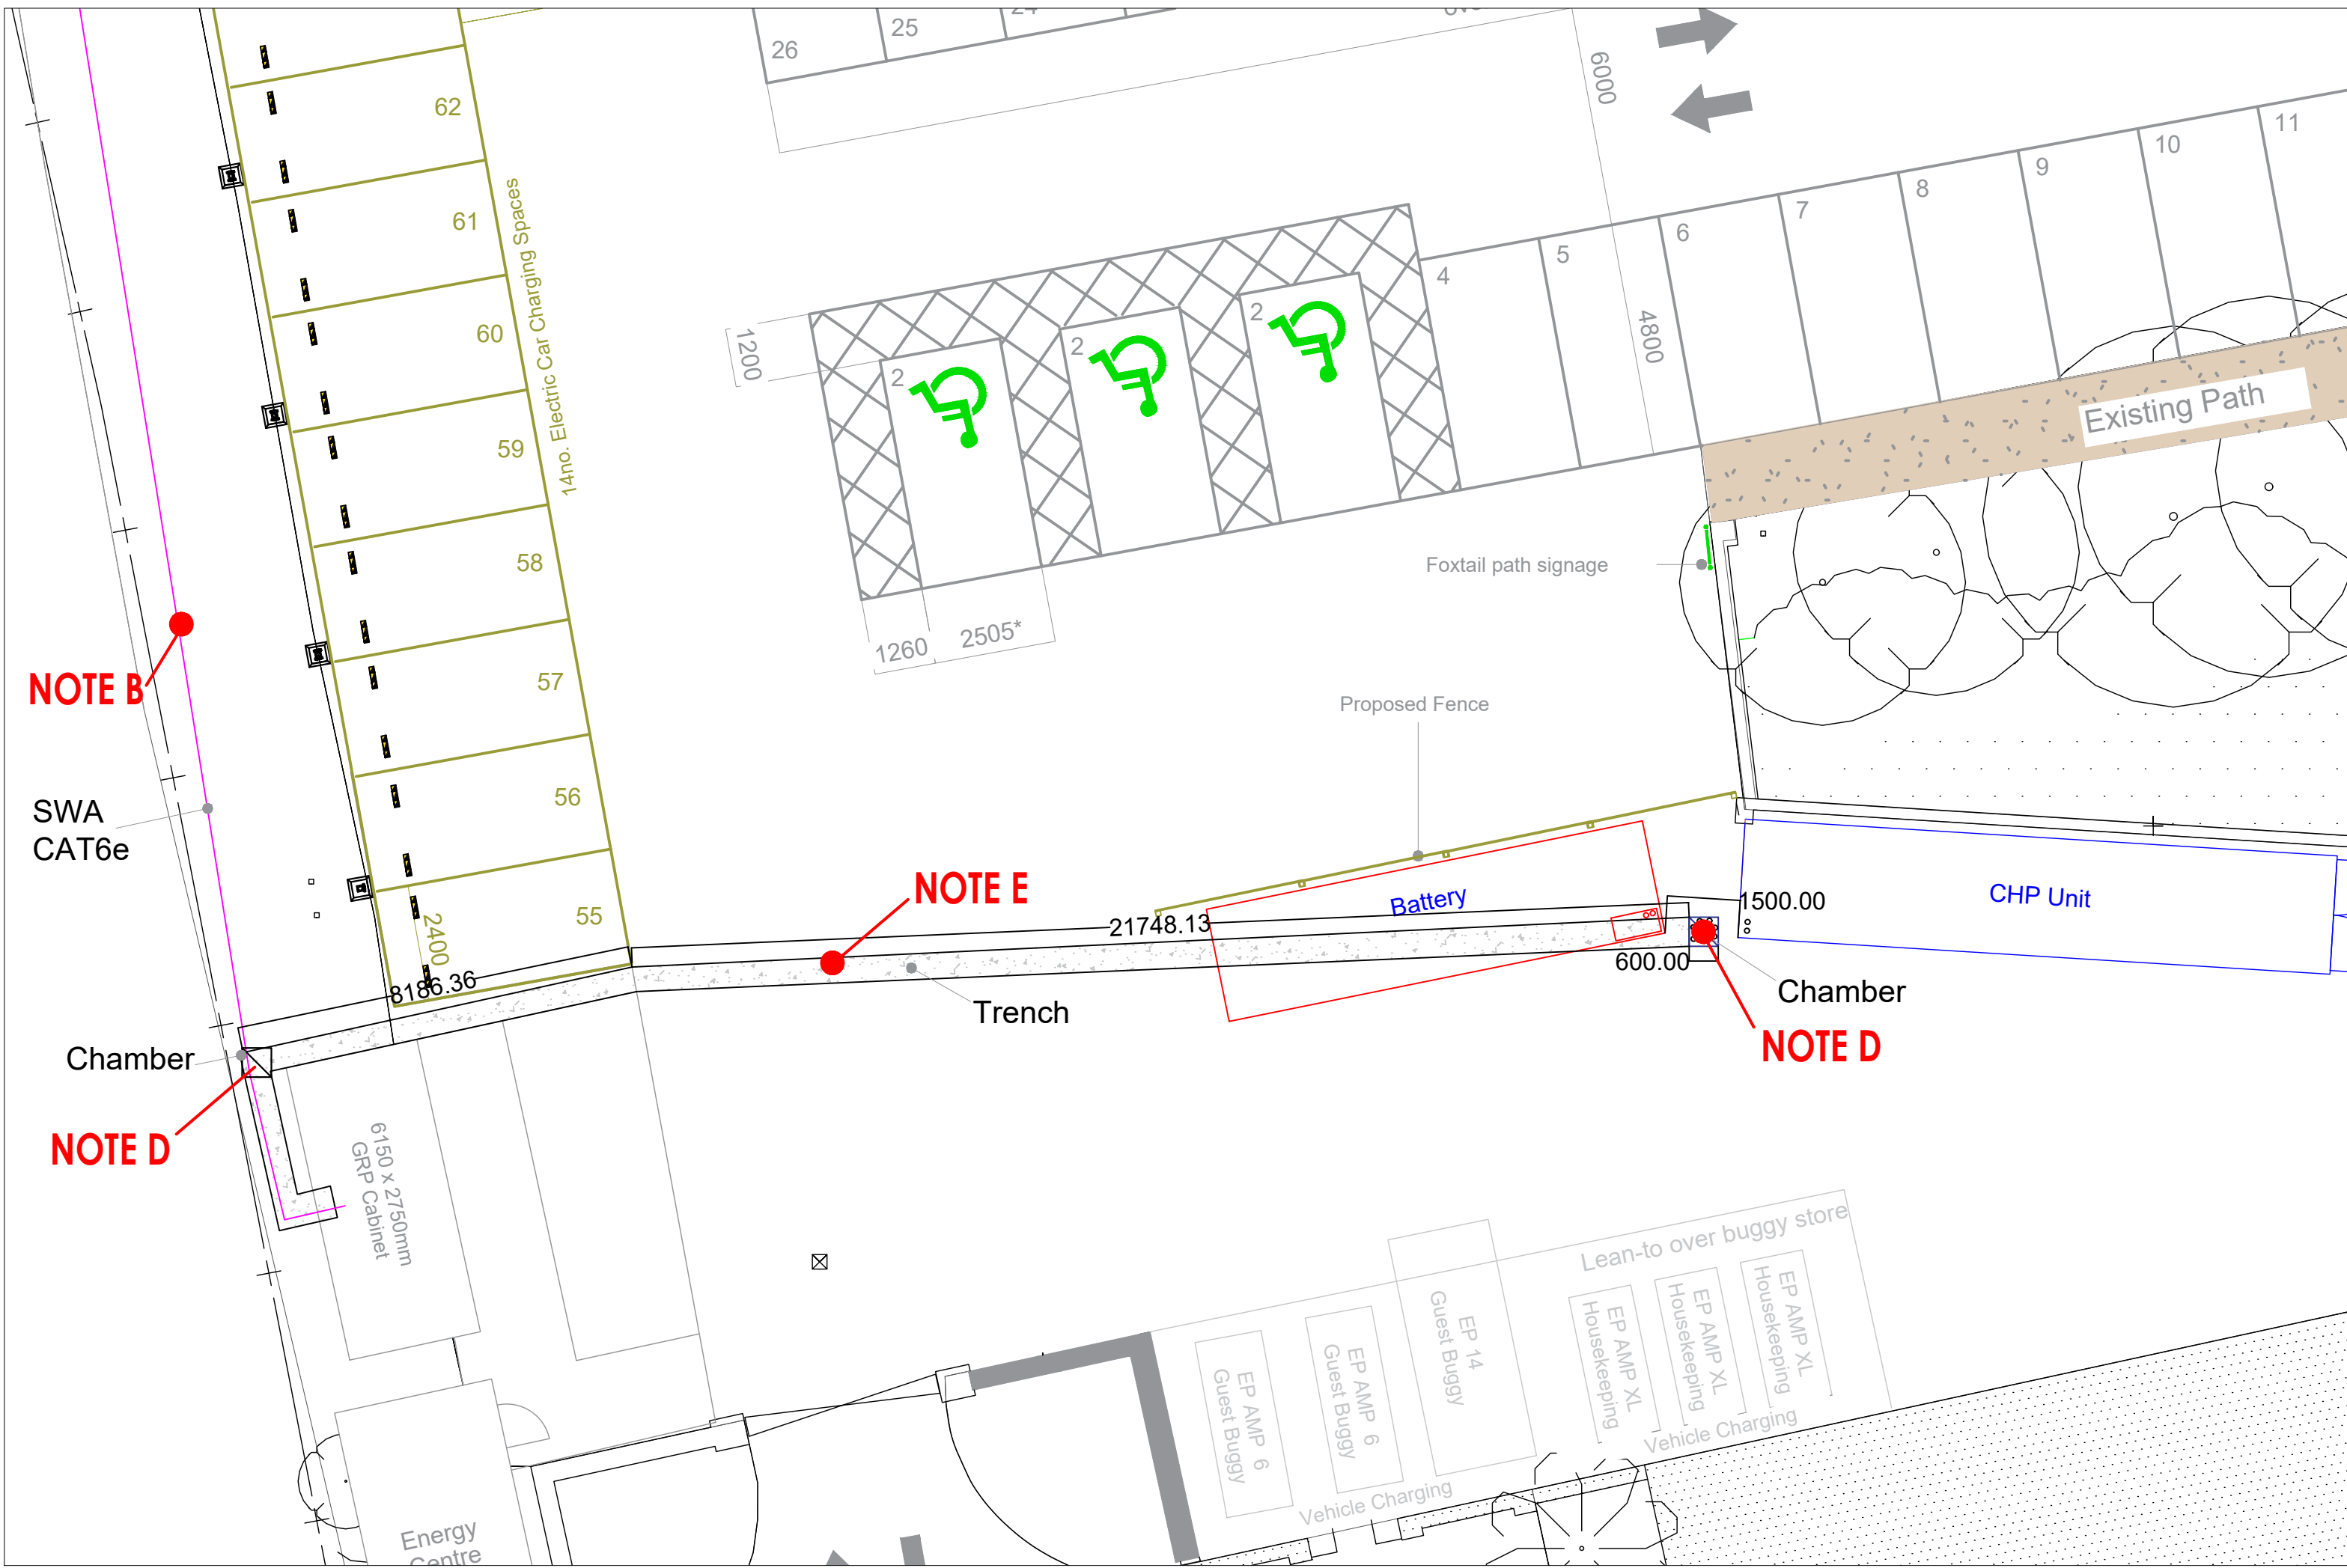

CDM RESIDUAL RISK INFORMATION (HASBox)
IN ADDITION TO THE HAZARDS/RISKS NORMALLY ASSOCIATED WITH THE TYPES OF WORK DETAILED ON THIS DRAWING, NOTE THE FOLLOWING:-
CONSTRUCTION:- POSSIBLE ASBESTOS - DUE DILIGENCE TO BE CARRIED OUT ON SITE. FOR ANY SUSPECT MATERIALS, IF FOUND SHOULD BE REPORTED
MAINTENANCE/CLEANING:- POSSIBLE ASBESTOS - DUE DILIGENCE TO BE CARRIED OUT ON SITE. FOR ANY SUSPECT MATERIALS, IF FOUND SHOULD BE REPORTED
DEMOLITION/DECOMMISSIONING:- POSSIBLE ASBESTOS - DUE DILIGENCE TO BE CARRIED OUT ON SITE. FOR ANY SUSPECT MATERIALS, IF FOUND SHOULD BE REPORTED
IT IS ASSUMED THAT ALL WORKS WILL BE CARRIED OUT BY A COMPETENT CONTRACTOR WORKING, WHERE APPROPRIATE, TO AN APPROVED METHOD STATEMENT.

Drawing Notes:
NOTE A This is to be 2no 50mm (minimum) of 44m x 2 ducting supplied by client and installed to a suitable depth complete with draw rope.
NOTE B This can be a shallow trench for direct buried com's cable from the Main GRP to the 1st inverter location. Meelgroup to supply cable to site in readiness for install.
NOTE C Existing 185mm cables to be exposed for extension joint to the inverter location, this will require to be buried with cable marker tape on completion.
NOTE D Min 600mm sq Access chamber with 110mm ducting (In/Out) as shown on drawing TI-1&D2 XX-00-DR-EP-0001
NOTE E As Per Trench Detail

01	17/01/23	TENDER ISSUE	SK
REV	DATE	NOTE	ENG

ISSUE STAGE:	CONSTRUCTION ISSUE
--------------	--------------------

The Depot, Station Street, Macclesfield, SK10 2AW

CLIENT:	The Tawny Hotel Limited
---------	-------------------------

PROJECT:	Trench & Duct
----------	---------------

DRAWING TITLE:	Trench and Duct Consult
----------------	-------------------------

DESIGNED / DRAWN BY:	SUITABILITY:	CHECKED:	APPROVED:
SK	---		
MEELGROUP PROJECT NUMBER:	SCALE:		
0001	Not to Scale		

THIS DRAWING IS ISSUED FOR TENDER PURPOSES ONLY - THIS DRAWING IS NOT TO BE