


Bio-diversity Scrub Planting Area (459sq.m.)				
Scientific Name	Common Name	Number to be Planted	Density per sq.m.	
Frangula alnus	Alder buckthorn	153	2	
Fagus sylvatica	Beech	153	2	
Prunus spinosa	Blackthorn	153	2	
Buxus sempervirens	Box	153	2	
Cornus sanguinea	Dogwood	153	2	
Prunus avium	Wild Cherry	153	2	

Hedgerow Creation				
Species	Specification	% of mix	No.	Prill
Acer Campestre	60 - 80 cms bare root	15%	131	4
Crataegus monogyna	60 - 80 cms bare root	50%	103	4
Corylus avellana	60 - 80 cms bare root	25%	52	4
Ilex aquifolium	60 - 80 cms bare root	2%	4	4
Ligustrum Vulgare	60 - 80 cms bare root	2%	4	4
Viburnum Opulus	60 - 80 cms bare root	2%	4	4
Rosa Canina	60 - 80 cms bare root	2%	4	4
Rhamus Frangula	60 - 80 cms bare root	2%	4	4



Native hedge mix (approximately 68m in total) to be planted in row at 330mm centres in a random mix of the plants. One tree is to be incorporated into the hedge every 20m

Trees		Specification	No.	Fertiliser Tablets
Sa	Rowan (Sorbus aucuparia)	250 - 300cm 8 - 10cm girth Root Balled	2	10
Bp	Downy birch (Betula pubescens)	250 - 300cm 8 - 10cm girth Root Balled	2	10
Pa	Wild Cherry (Prunus Avium)	250 - 300cm 8 - 10cm girth Root Balled	2	10
Ac	Field Maple (Acer Campestre)	250 - 300cm 8 - 10cm girth Root Balled	2	10
Pa	Oak (Quercus Robur)	250 - 300cm 8 - 10cm girth Root Balled	2	10

Trees are to be planted accordance with BS 3936, BS8545 and The National Plant Specification - 'Bare Root Trees'.

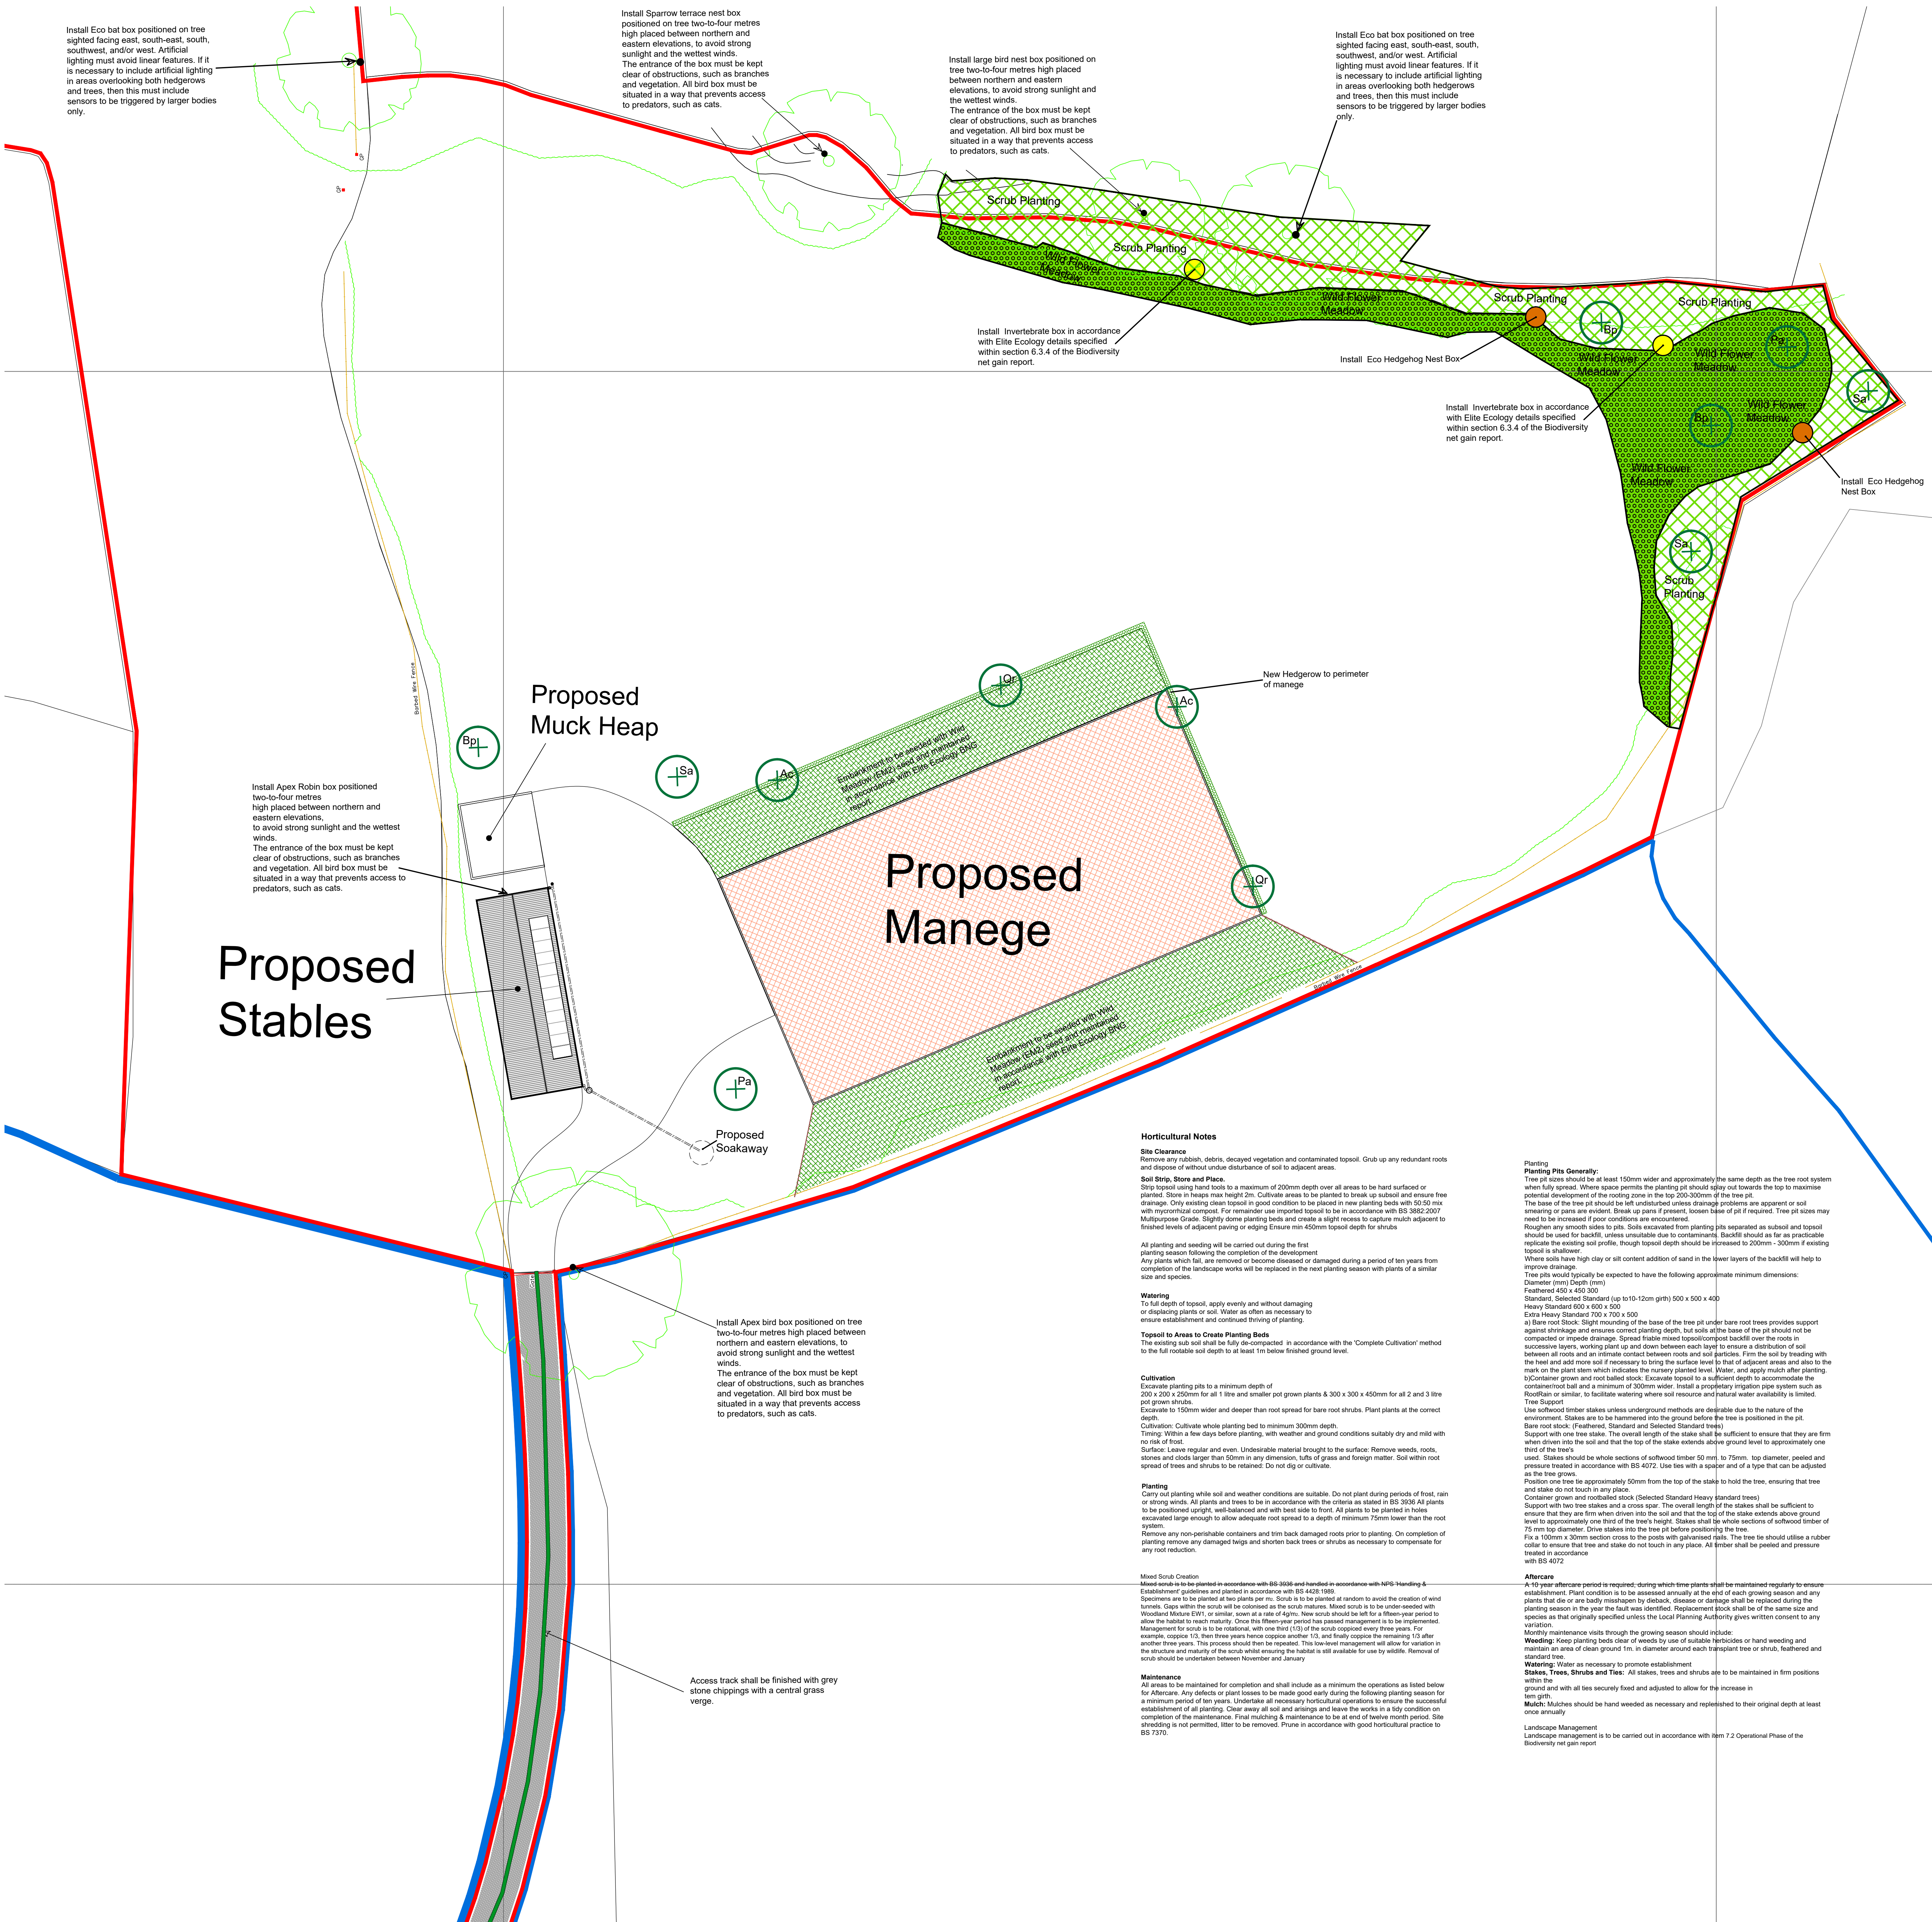

Landscaping Plan. scale 1:200 @ A0

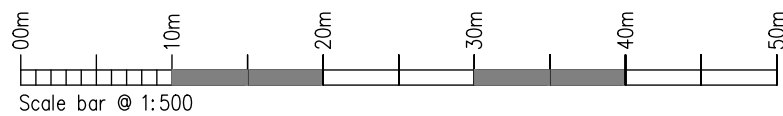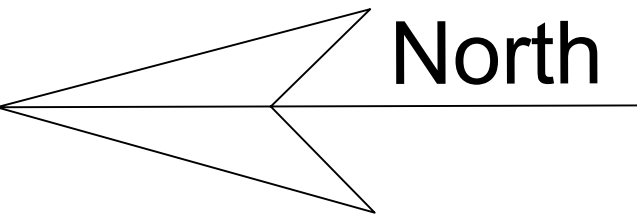

Rev	Drawn	Comments	Date

MAC
ARCHITECTURAL DESIGN LTD

Moorland House, 123 Moorland Road, Burnham, ST16 1JD.
T:01782 503002. E:ash@mac-arch.co.uk

Client:
Mrs. B. Kirkham.

Project:
Proposed Stables and Manège
on Land off Stile House Lane,
Leek, Staffordshire. ST13 7LF

Title:
Landscaping Plan

Status:
Planning