


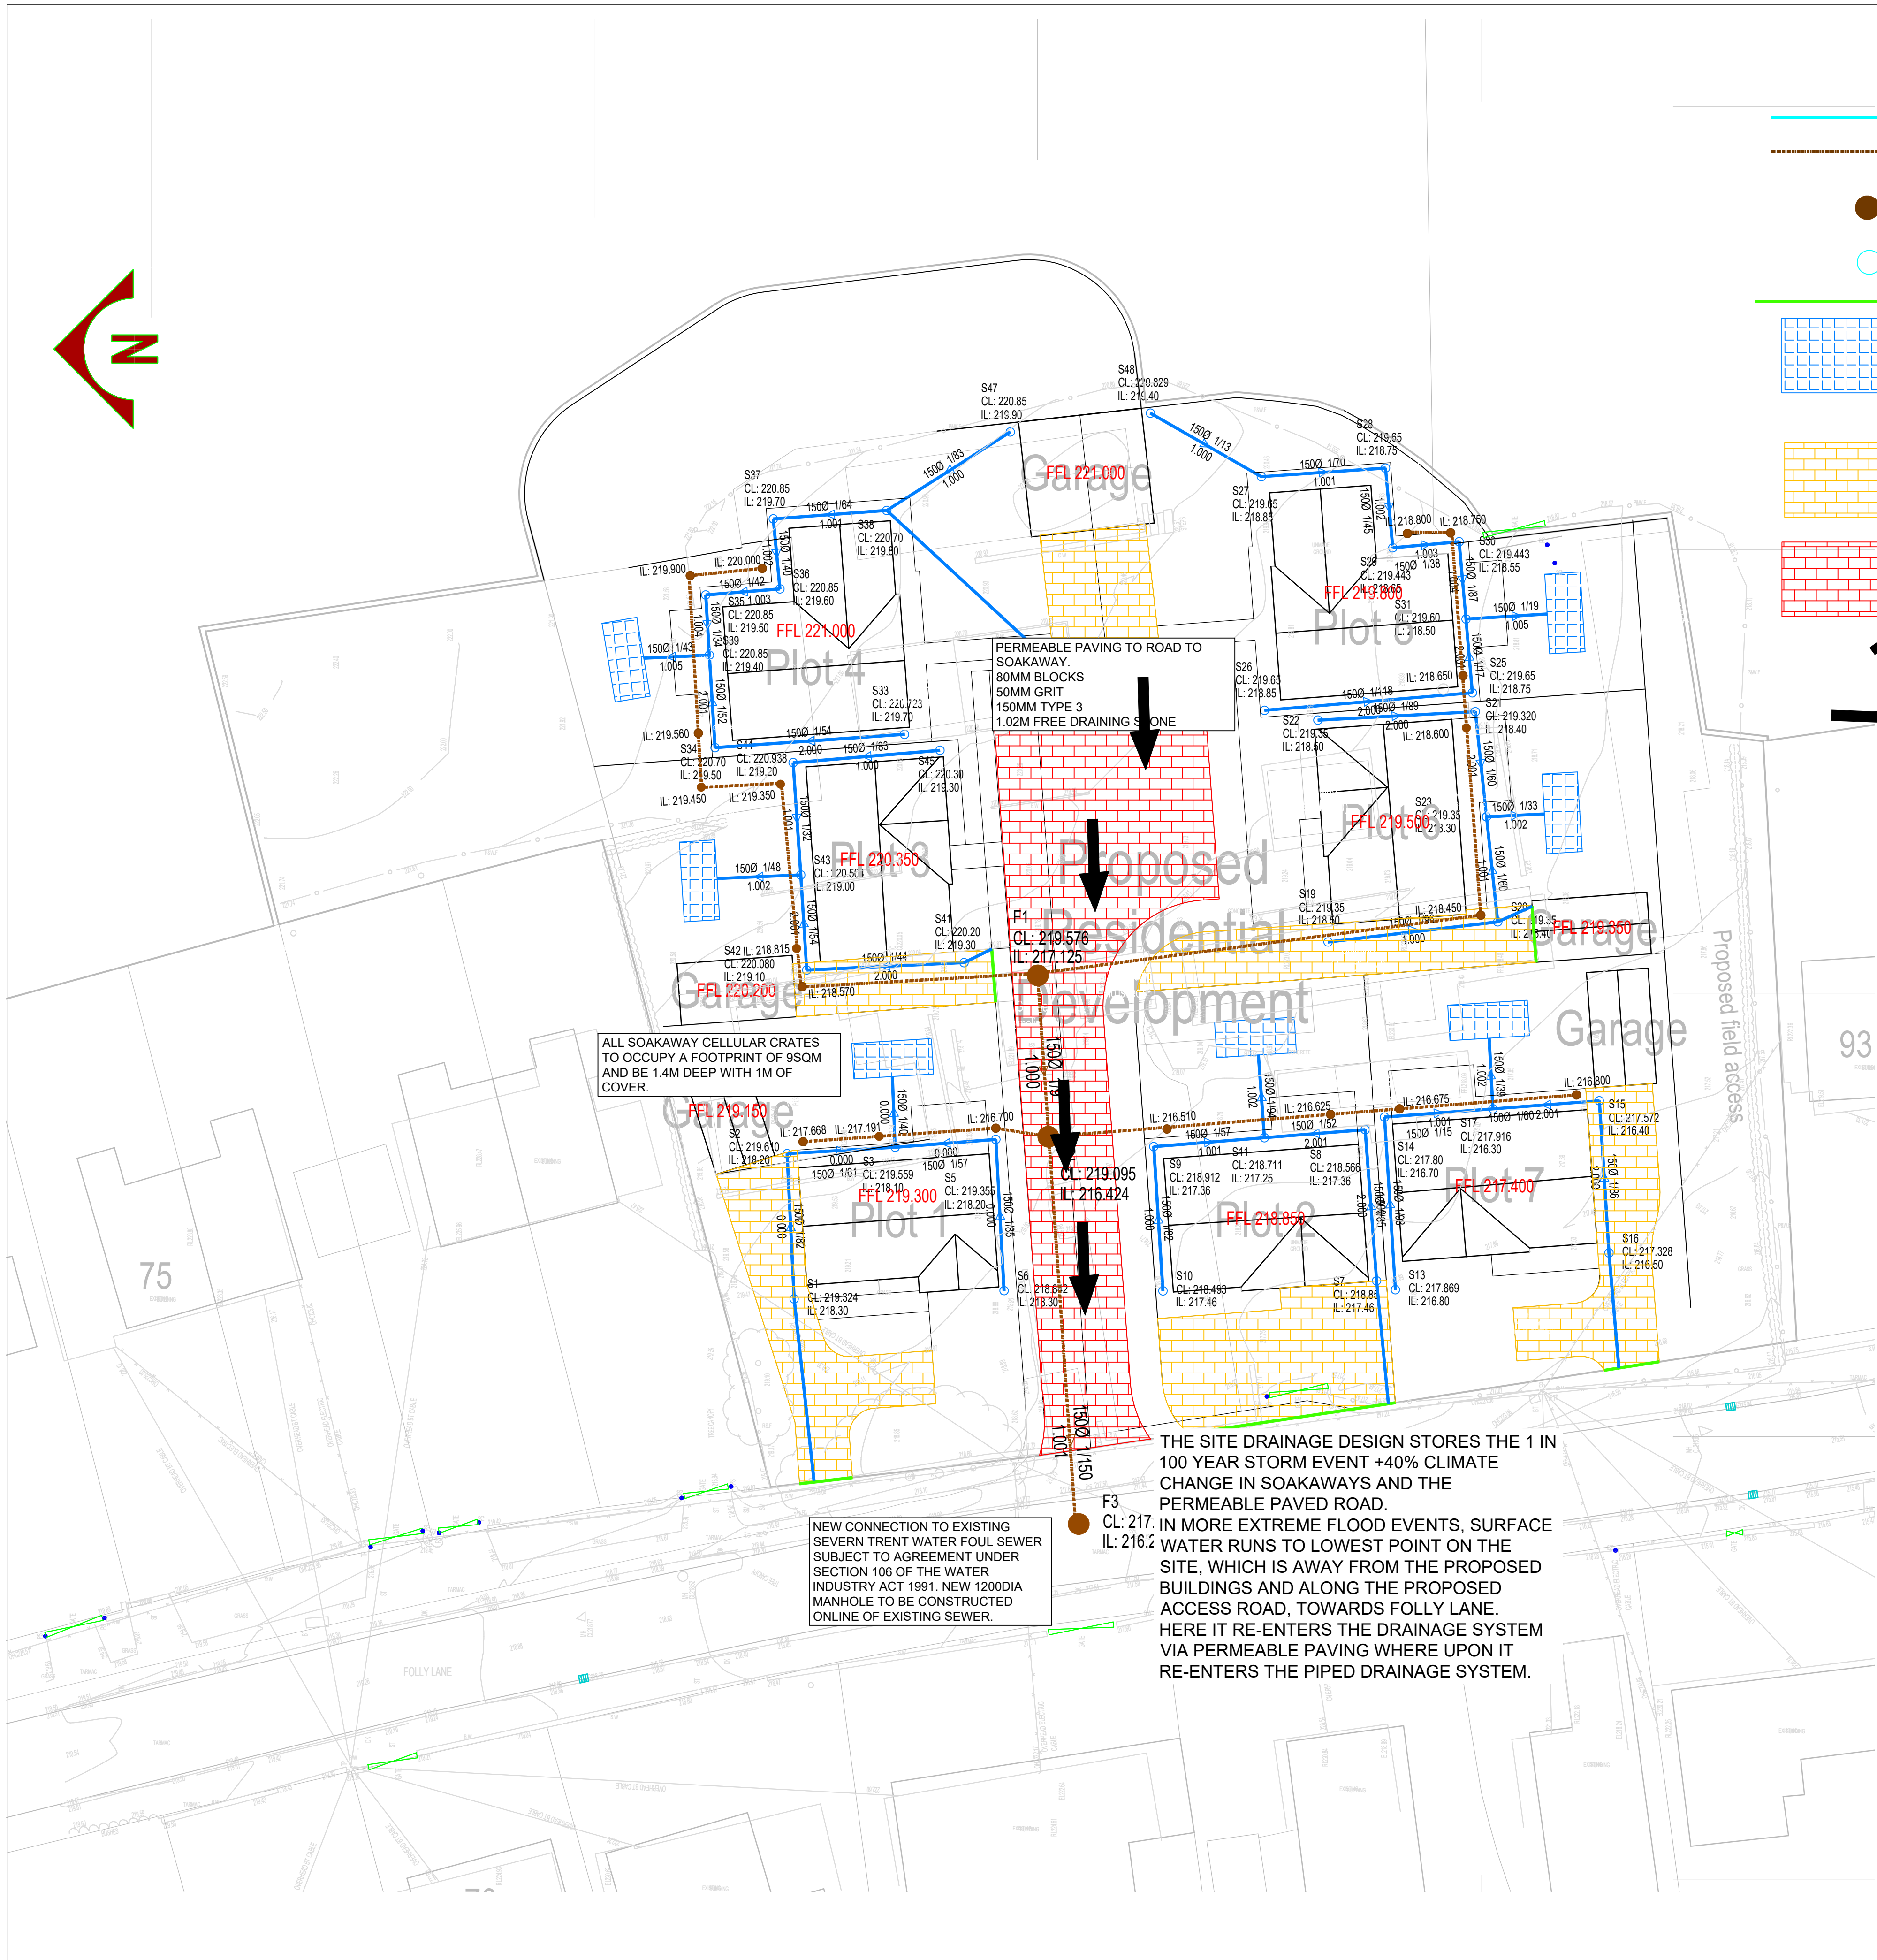

- KEY
- PROPOSED SURFACE WATER DOMESTIC DRAIN RUN
 - PROPOSED FOUL WATER DOMESTIC DRAIN RUN
 - PROPOSED FOUL WATER INSPECTION CHAMBER 1200DIA
 - PROPOSED SURFACE WATER INSPECTION CHAMBER 1200DIA
 - PERFORATED PIPE
 - PROPOSED CELLULAR SOAKAWAY
 - PERMEABLE PAVING TO SERVE AS A METHOD OF POLLUTION MITI
 - PERMEABLE PAVING TO ACT AS TEMPORARY STORAGE AND SERVI METHOD OF POLLUTION MITIGATION.
 - PROPOSED GULLY
 - EXCEEDANCE FLOOD FLOW ROUTE

- NOTES:
- ALL DIMENSIONS IN MILLIMETRES UNLESS STATED OTHERWISE.
 - ALL DRAINAGE WORKS ARE TO COMPLY WITH THE REQUIREMENTS OF BS 752 BUILDING DRAINAGE AND BUILDING REGULATIONS 2010 INCORPORATING 2015 AMENDMENTS.
 - ALL MATERIALS UNLESS SPECIFIED OTHERWISE SHALL COMPLY WITH THE RELEVANT BRITISH STANDARD. SOURCES OF MATERIALS ARE TO BE AGREED WITH THE EMPLOYER'S REPRESENTATIVE/ENGINEER IN ADVANCE OF THE WORKS.
 - THIS DRAWING TO BE READ IN CONJUNCTION WITH ALL OTHER ENGINEERING DRAWINGS AND DETAILS AND CONTRACT DOCUMENTATION.
 - ANY DISCREPANCIES IN THE DETAILS SHOWN TO BE REPORTED TO THE EMPLOYER'S REPRESENTATIVE/ENGINEER PRIOR TO CONSTRUCTION.
 - LOCATION AND LEVELS OF EXISTING DRAINAGE RUNS ARE BASED UPON SEWER RECORD PLANS AND MUST BE CHECKED ON SITE PRIOR TO THE COMMENCEMENT OF ANY DRAINAGE WORKS.
 - ALL EXISTING SERVICES TO BE LOCATED PRIOR TO THE COMMENCEMENT OF ANY DRAINAGE WORKS WHERE NECESSARY PROTECTION OR DIVERSIONS TO BE UNDERTAKEN TO AVOID CONFLICT WITH THE PROPOSED WORKS.
 - ALL DRAINAGE AND FITTINGS TO BE FLEXIBLY JOINTED CLAYWARE TO BS EN295 OR CONCRETE TO BS5911 PART 100 OR FLEXIBLY JOINTED UPVC PIPES AND FITTINGS TO WIS No 4-13-05.
 - TYPICAL PIPE BEDDING TO DRAINAGE WHERE DEPTH TO SOFFIT IS GREATER THAN 900mm IN LANDSCAPED AREAS AND GREATER THAN 1200mm IN TRAFFICKED AREAS IS TO BE CLASS S (I.E. 10-14mm GRADED IMPORTED GRANULAR BED AND SURROUND FOR PIPES UP TO 5250 AND 20 - 40mm GRADED IMPORTED GRANULAR BED AND SURROUND FOR PIPES GREATER THAN 5250).
 - WHERE DEPTH TO SOFFIT OF DRAINAGE PIPEWORK IS LESS THAN 900mm IN LANDSCAPED AREAS AND LESS THAN 1200mm IN TRAFFICKED AREAS THEN PIPEWORK IS TO BE PROTECTED WITH 150mm MINIMUM THICK CONCRETE BED & SURROUND.
 - BACKFILL TO DRAINAGE TRENCHES UNDER CARRIAGEWAYS TO BE TYPE 1 SUB-BASE MATERIAL. ELSEWHERE BACKFILL TO BE FREE DRAINING READILY COMPATIBLE MATERIAL, FREE FROM RUBBISH AND ORGANIC MATTER, FROZEN SOIL, CLAY LUMPS AND LARGE STONES. TO BE COMPACTED IN LAYERS NOT EXCEEDING 150mm THICK.
 - A FLEXIBLE JOINT SHALL BE PROVIDED AS CLOSE AS IS FEASIBLE TO OUTSIDE FACE OF ANY STRUCTURE INTO WHICH A PIPE IS BUILT. COMPATIBLE WITH THE SATISFACTORY COMPLETION AND SUBSEQUENT MOVEMENT OF THE JOINT. THE LENGTH OF THE NEXT PIPE (ROCKER PIPE) AWAY FROM THE STRUCTURE SHALL BE AS SHOWN IN THE TABLE BELOW.
- | NOMINAL DIAMETER (mm) | EFFECTIVE LENGTH (m) |
|-----------------------|----------------------|
| 150-600 | 0.6 |
| 675-750 | 1.0 |
| 825 AND OVER | 1.25 |
13. ALL LEVELS ARE IN METRES ABOVE ORDNANCE DATUM.
14. ALL FOUL DRAINS ARE 150mm DIA UNLESS NOTED OTHERWISE
15. ALL STORM DRAINS ARE 150mm DIA UNLESS NOTED OTHERWISE

B SCALE CHANGE TO 1/200 24.09.24
A FOUL INSPECTION CHAMBERS ADDED AROUND PLOTS 15.08.24

Rev	Description	Chk'd	App'd	Date
-----	-------------	-------	-------	------

Issue PRELIMINARY

Client/Architect
UPPERDALES DEVELOPMENT LTD

Contract
LILAC GROVE CHEDLETON

Title
OVERLAND ROUTING PLAN



Date July 24 Scale 1:200
Original size A1
Drawn HB
Checked Approved

Drawing No. K24-032-003 Revision. B