
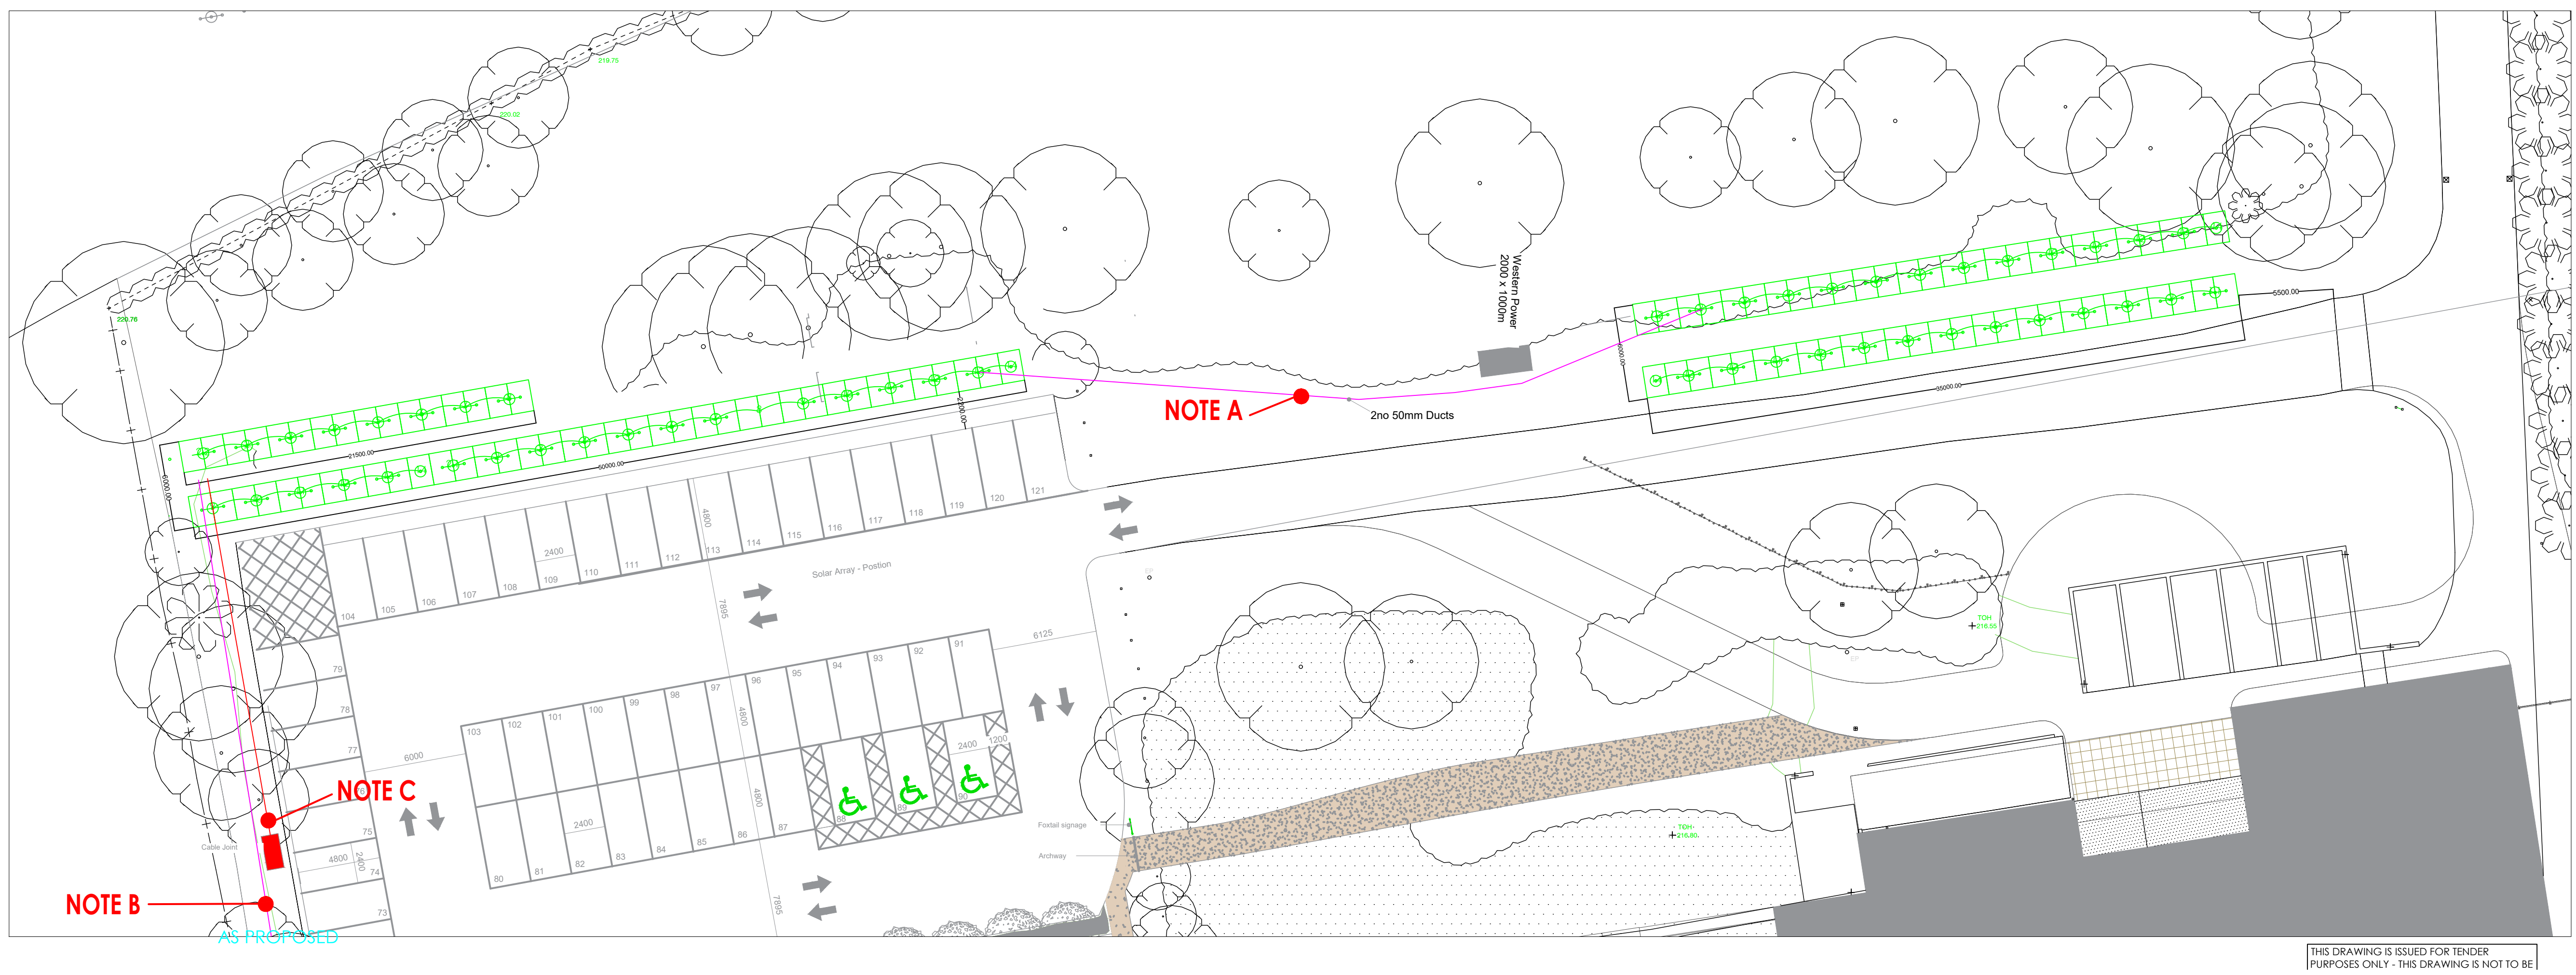


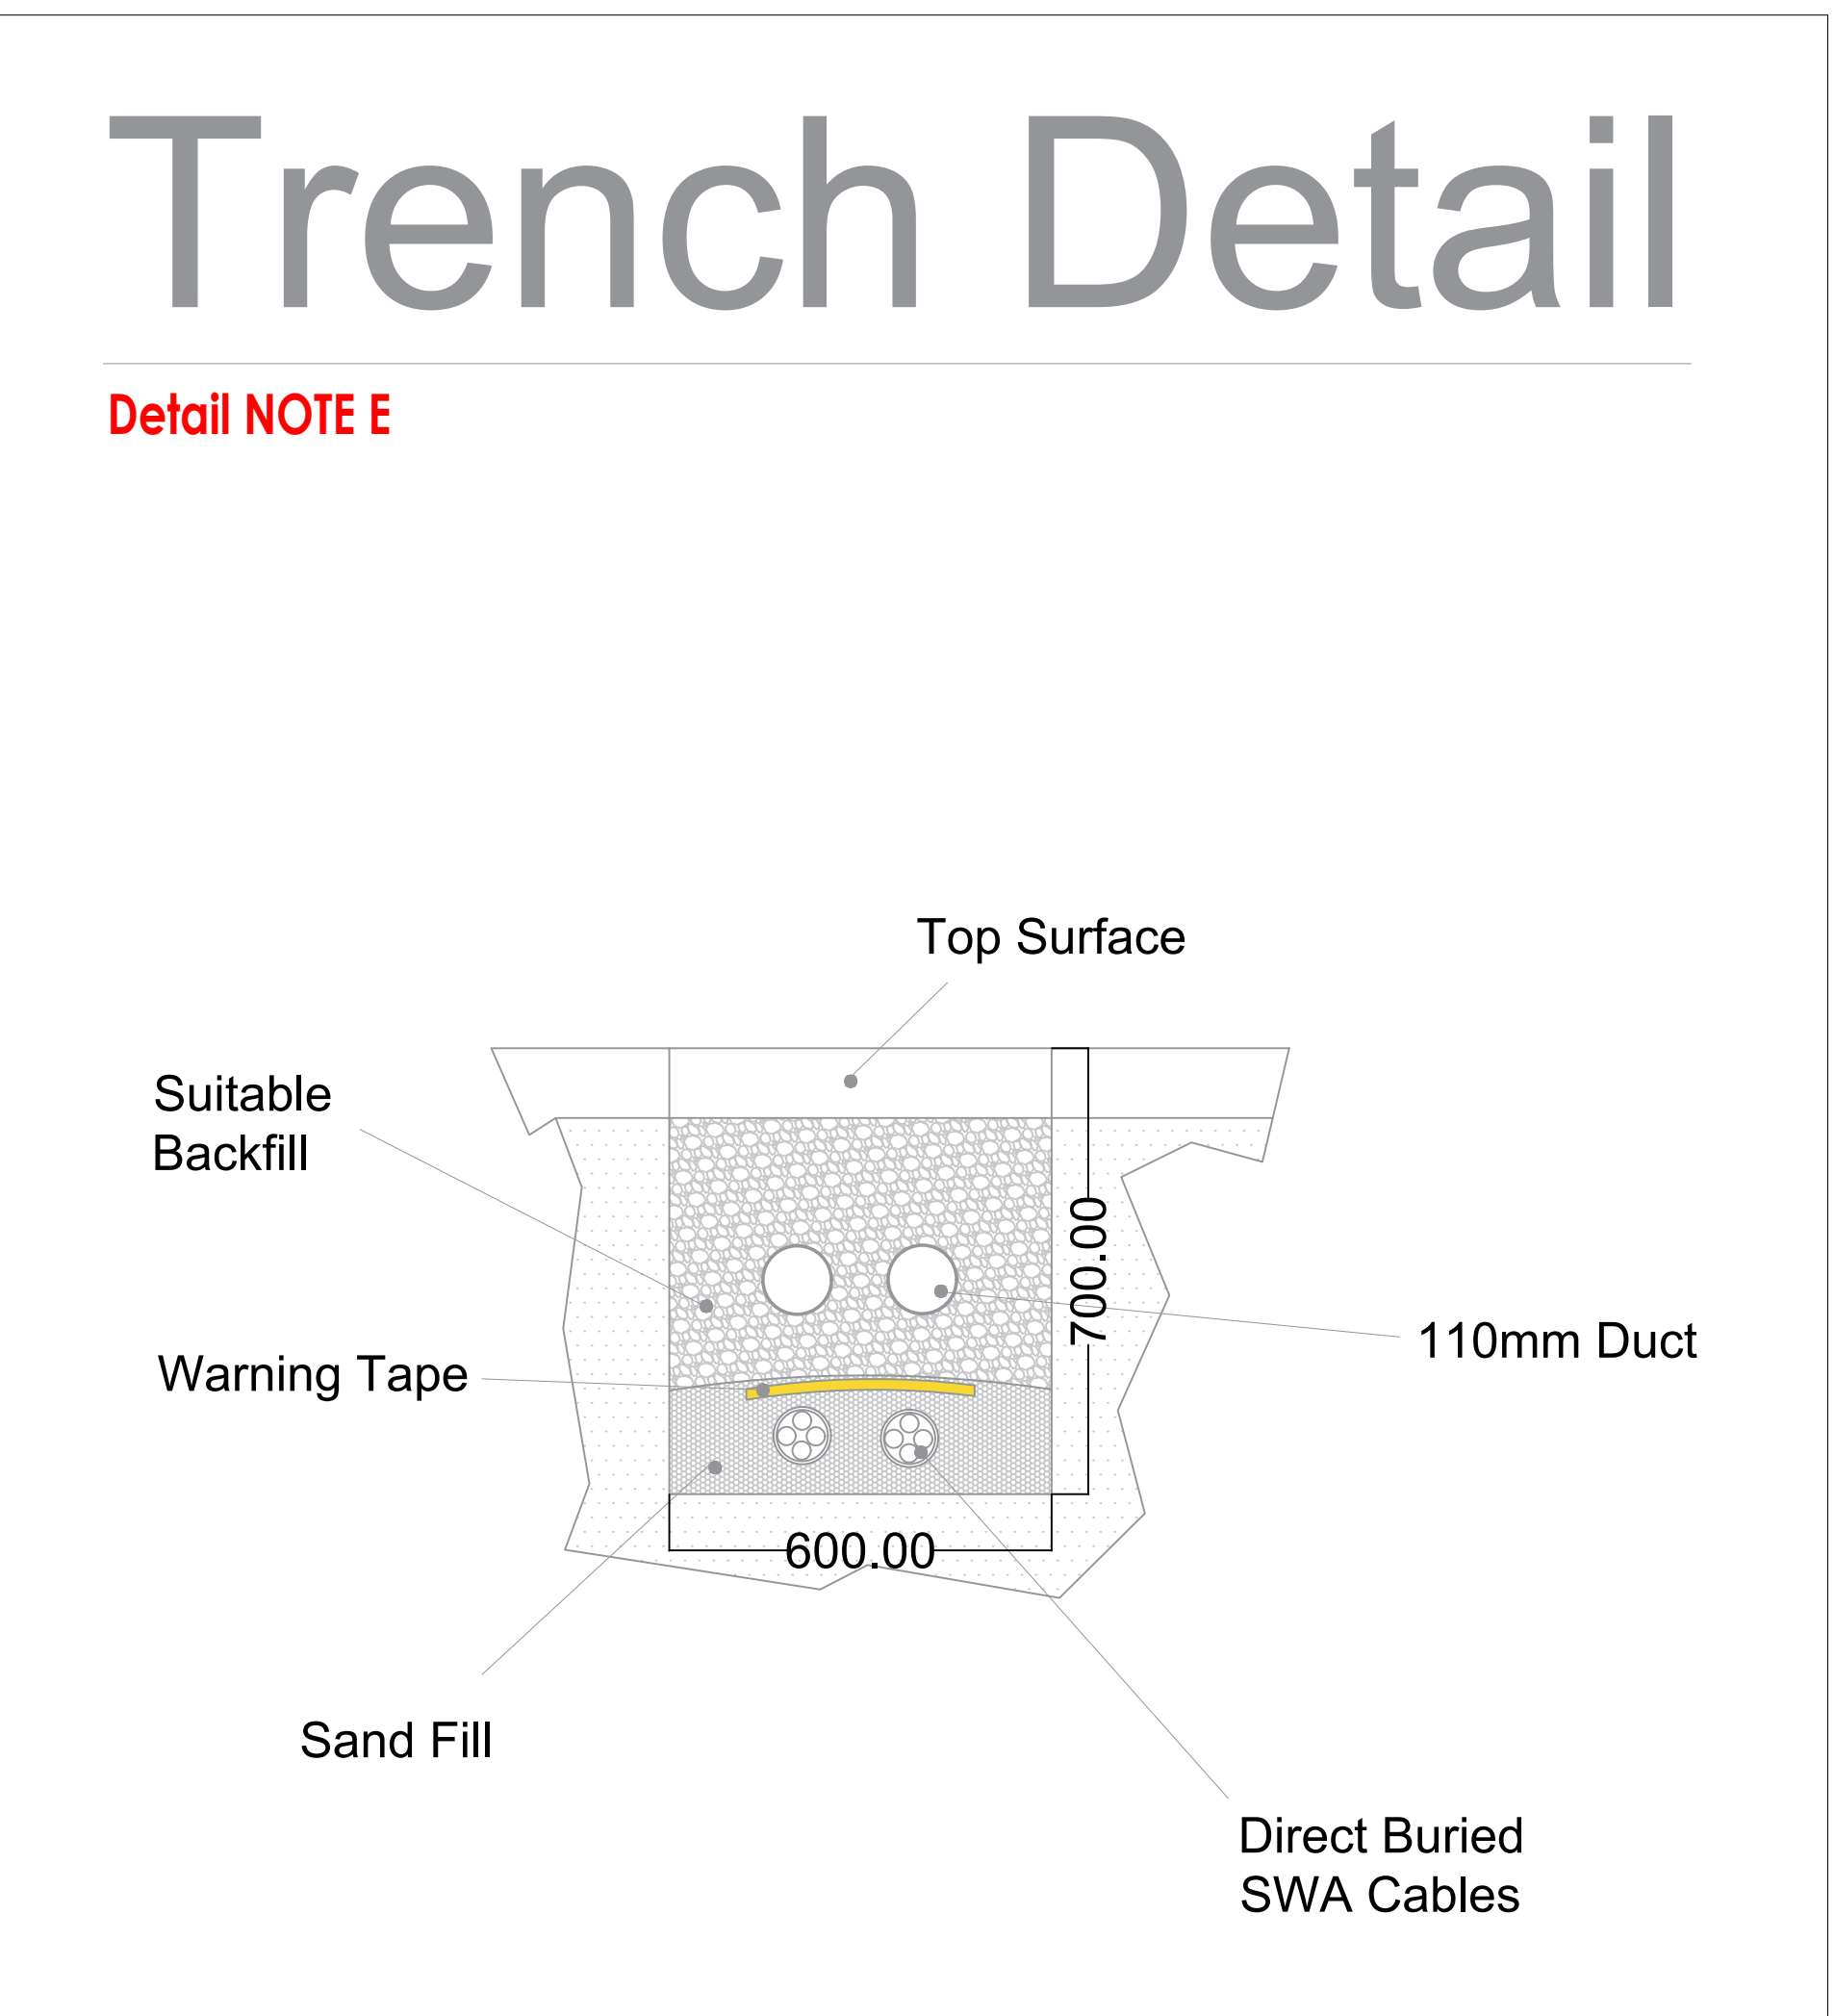

<u>CDM RESIDUAL RISK INFORMATION (HASBox)</u>	
IN ADDITION TO THE HAZARDS/RISKS NORMALLY ASSOCIATED WITH THE TYPES OF WORK DETAILED ON THIS DRAWING, NOTE THE FOLLOWING:-	
CONSTRUCTION:-	POSSIBLE ASBESTOS - DUE DILIGENCE TO BE CARRIED OUT ON SITE, FOR ANY SUSPECT MATERIALS, IF FOUND SHOULD BE REPORTED
MAINTENANCE/CLEANING:-	POSSIBLE ASBESTOS - DUE DILIGENCE TO BE CARRIED OUT ON SITE, FOR ANY SUSPECT MATERIALS, IF FOUND SHOULD BE REPORTED
DEMOLITION/DECOMMISSIONING:-	POSSIBLE ASBESTOS - DUE DILIGENCE TO BE CARRIED OUT ON SITE, FOR ANY SUSPECT MATERIALS, IF FOUND SHOULD BE REPORTED
IT IS ASSUMED THAT ALL WORKS WILL BE CARRIED OUT BY A COMPETENT CONTRACTOR WORKING WHERE APPROPRIATE, TO AN APPROVED METHOD STATEMENT.	

Drawing Notes:			
NOTE A This is to be 2no 50mm (minimum) at 44m x 2 ducting supplied by client and installed to a suitable depth complete with draw rope. NOTE B This can be a shallow trench for direct buried . com's cable from the Main GRP to the 1st inverter location . Meelgroup to supply cable to site in readiness for install. NOTE C Existing 185mm cables to be exposed for extension joint to the inverter location, this will require to be buried with cable marker tape on completion. NOTE D Min 600mm sq Access chamber with 110mm ducting (In/Out) as shown on drawing T1-TA02-XX-00-DR-EF-0001 NOTE E As Per Trench Detail			
01	17/01/23	TENDER ISSUE	SK
REV	DATE	NOTE	ENG

ISSUE STAGE: CONSTRUCTION ISSUE

SES PART OF meel group

The Depot, Station Street, Macclesfield,
SK10 2AW

CLIENT:

The Tawny Hotel Limited

PROJECT:
Trench & Duct

DRAWING TITLE:

Trench and Duct
Consall

DESIGNED / DRAWN BY:	SUITABILITY:	CHECKED:	APPROVED:
SK	—		
MEELGROUP PROJECT NUMBER:		SCALE:	
0001		Not to Scale	

THIS DRAWING IS ISSUED FOR TENDER
PURPOSES ONLY - THIS DRAWING IS NOT TO BE