
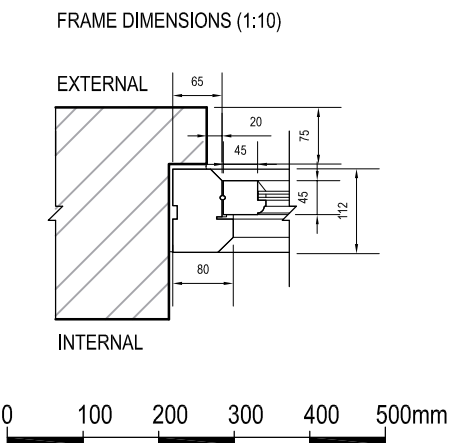
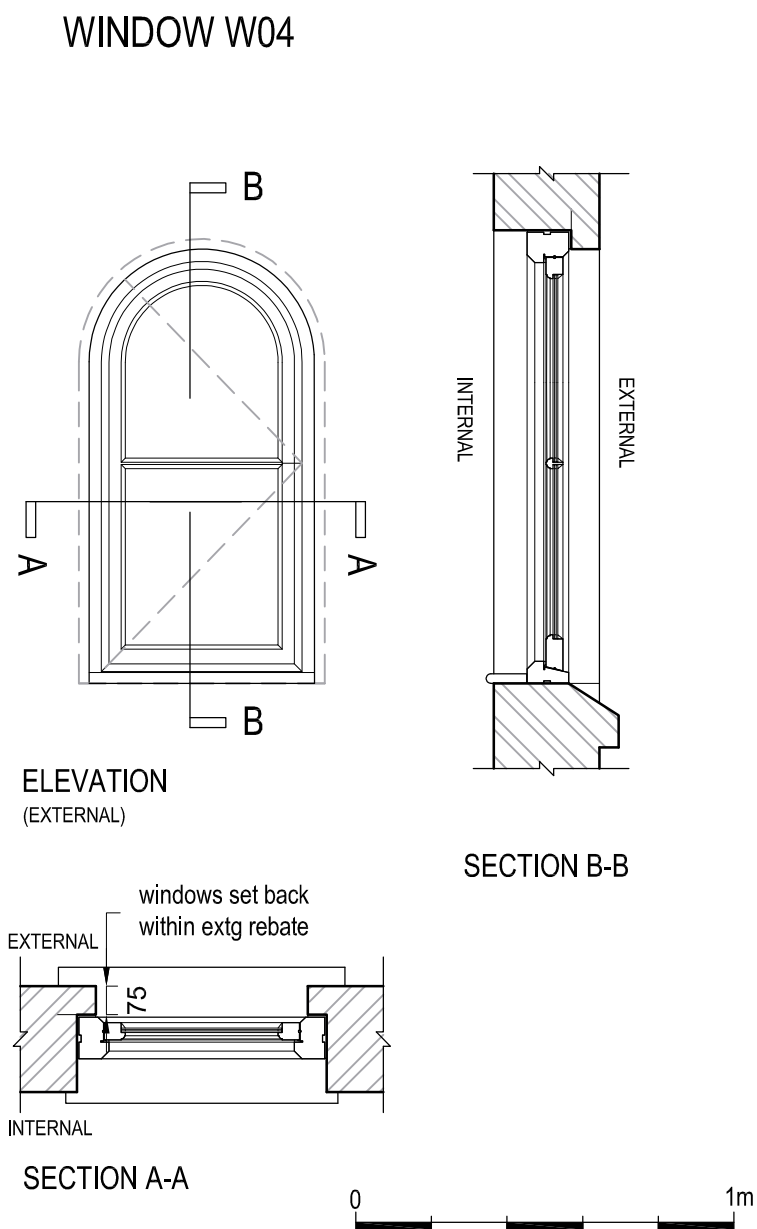
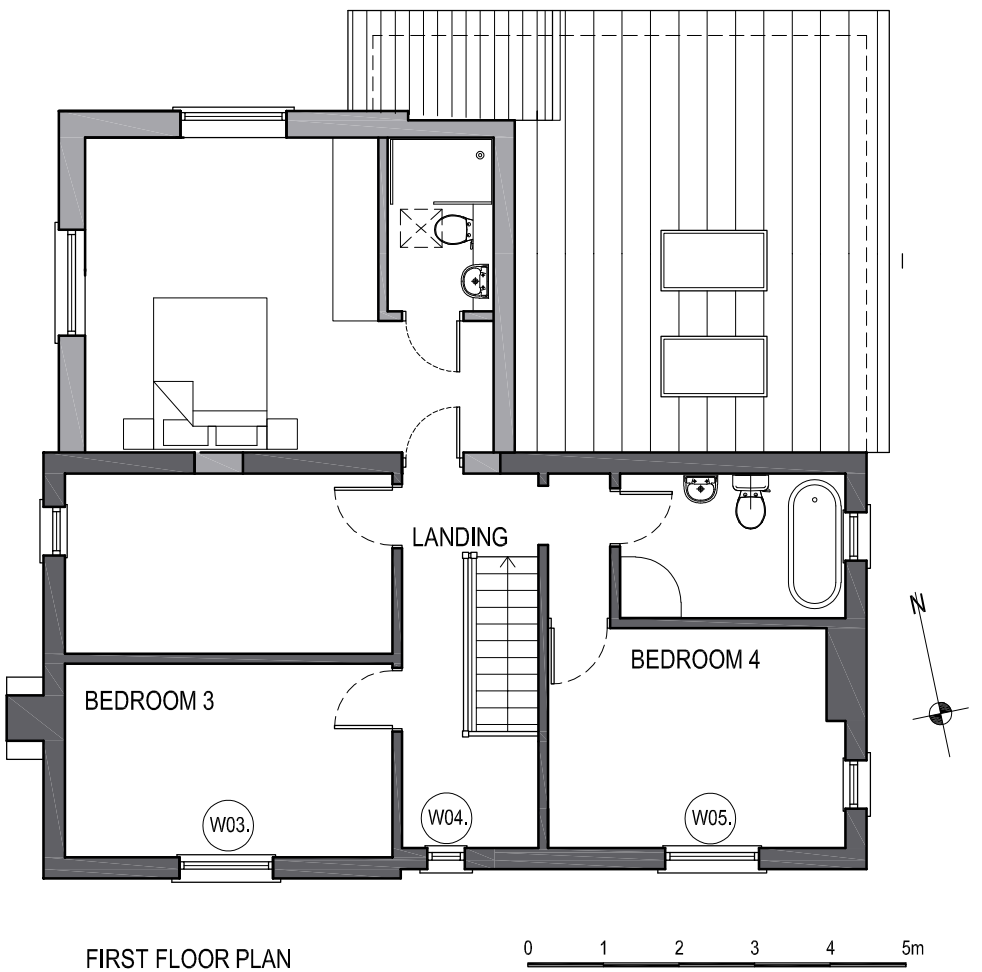


WINDOWS W03 & W05

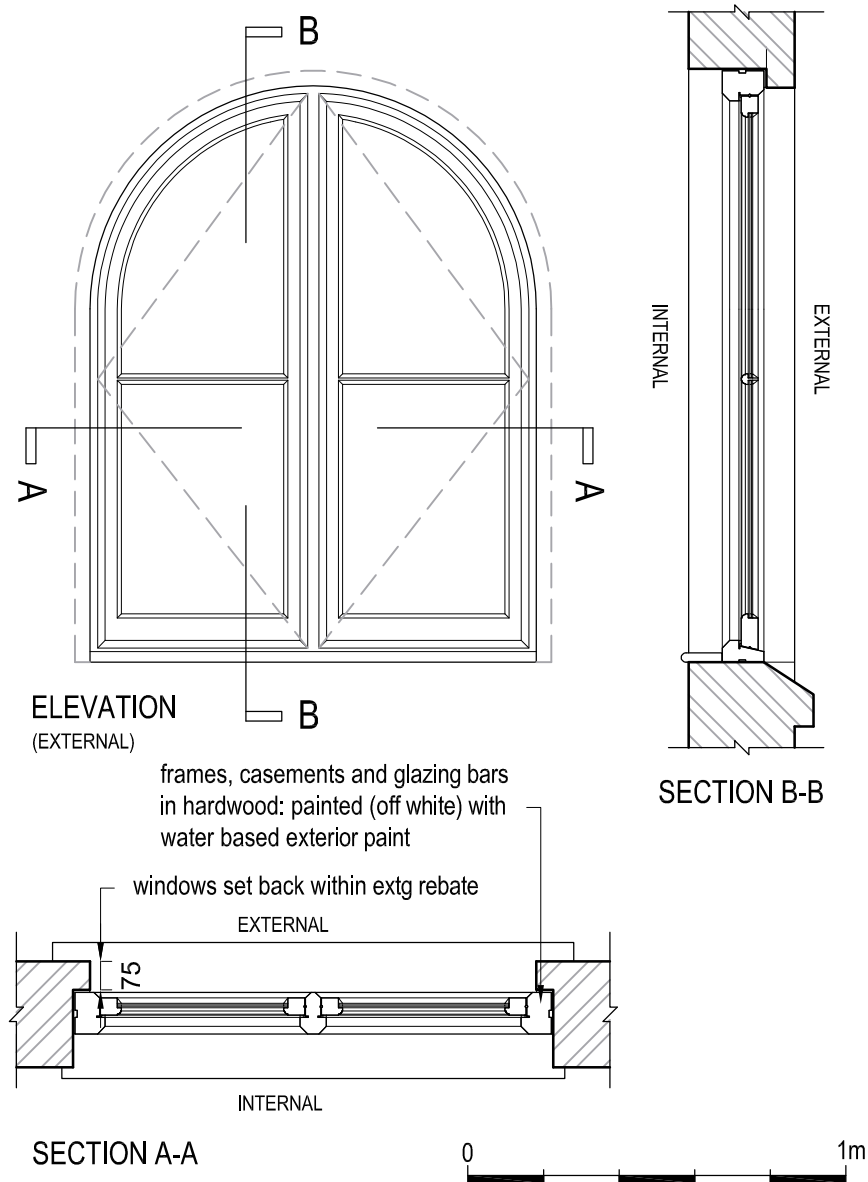

WINDOW SPECIFICATION

Windows to be slim-line double glazed units in hardwood recessed casements and frames with integral glazing beads (not planted). Windows to be set back within existing brick rebate (approx 75mm). Window timbers to be finished in water-based heritage paint in off-white.

Revisions	