


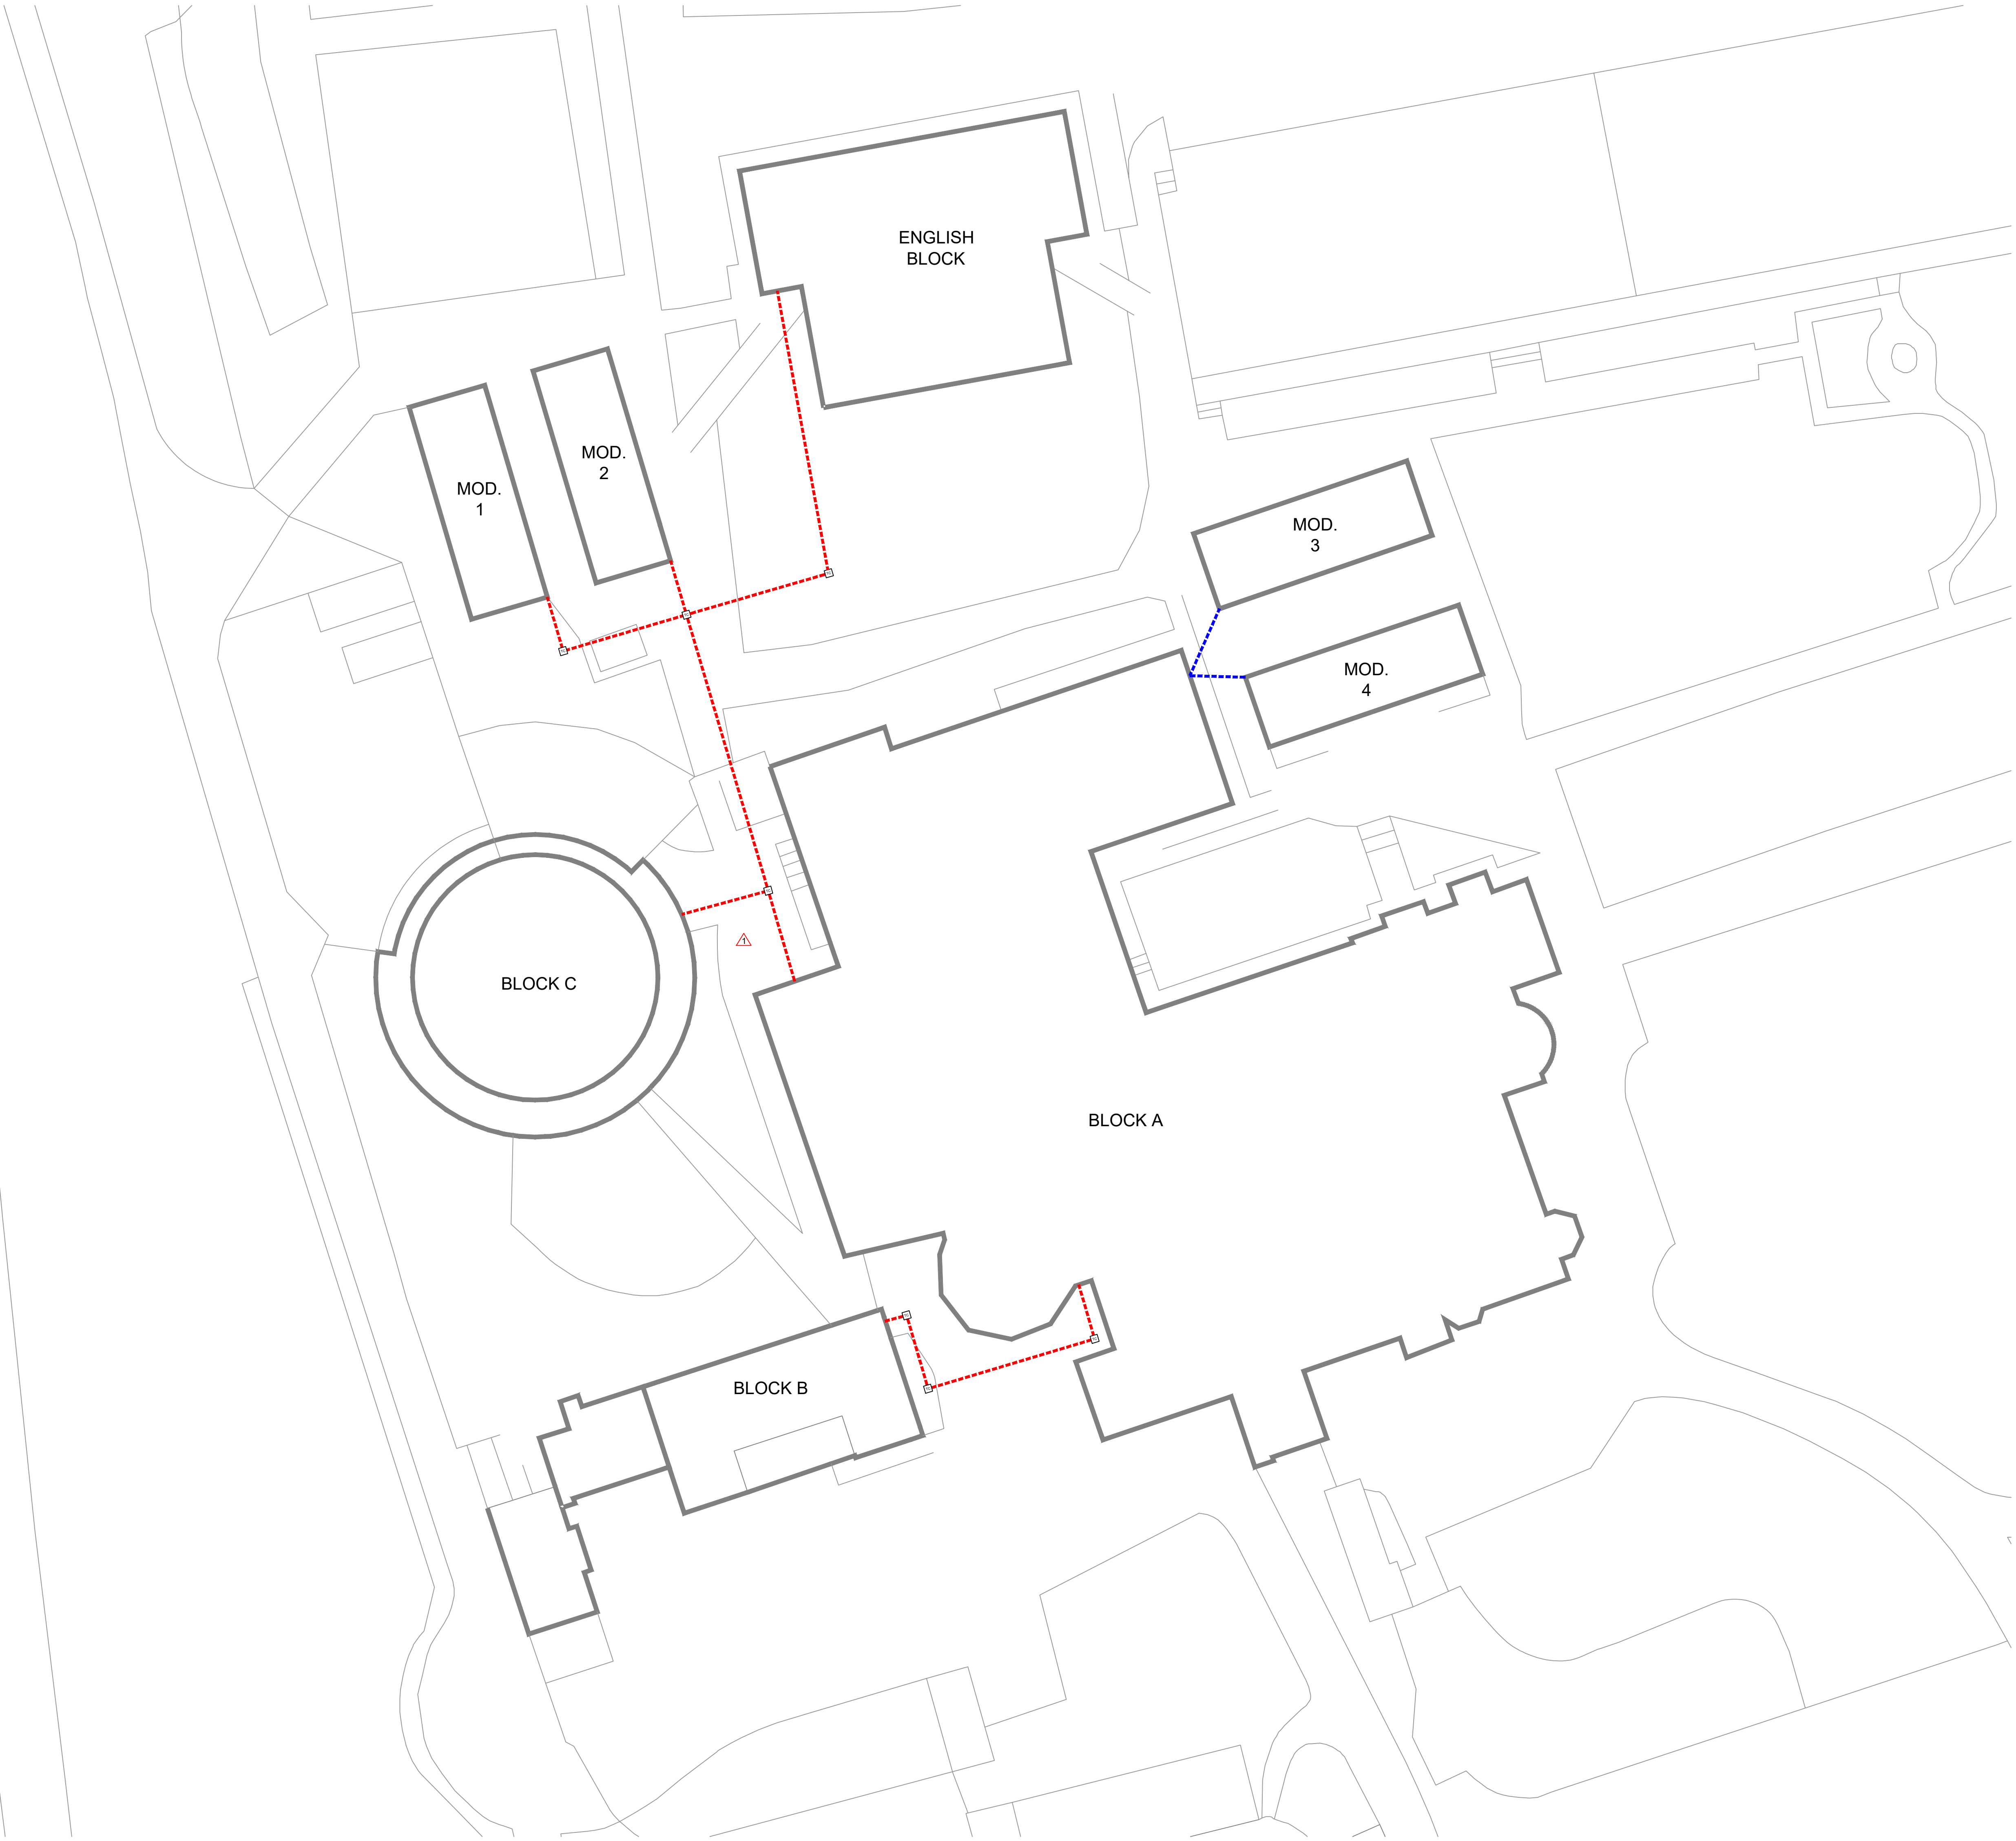

CONTAINMENT LEGEND	
SYMBOL	DESCRIPTION
	100mmØ CABLE DUCT IN TRENCH FOR FP200 LINK CABLE BETWEEN BLOCKS
	CATENARY WIRE SUSPENSION SYSTEM FOR FP200 LINK CABLE
	DRAW PIT/ TURNING CHAMBER

GENERAL NOTES	
1	THIS DRAWING SHALL BE READ IN CONJUNCTION WITH THE ECS ELECTRICAL ENGINEERING SPECIFICATIONS
2	THIS DRAWING IS INDICATIVE AND IS INTENDED TO HIGHLIGHT THE PROPOSED LOCATION FOR ELECTRICAL SERVICES. THE CONTRACTOR SHALL NOTE THESE DRAWINGS SHALL NOT BE USED FOR CONSTRUCTION PURPOSES. THE CONTRACTOR SHALL INCLUDE TO PRODUCE THEIR OWN WORKING DRAWINGS. TAKE DETAILED SITE MEASUREMENTS, INDICATE THE PROVISION OF BUILDERS WORKS AND COORDINATE THE INSTALLATION OF ALL SERVICES.
3	THE CONTRACTOR SHALL NOTE THIS DRAWING HAS BEEN PRODUCED USING LIMITED SITE SURVEY INFORMATION. THE CONTRACTOR SHALL INCLUDE TO CARRY OUT AN INTRUSIVE SURVEY AND TO PRODUCE DRAWINGS THAT REFLECT THE INSTALLATION.
4	ALL EQUIPMENT SHALL BE INSTALLED & LOCATED TO MAINTAIN SPATIAL REQUIREMENTS TO FACILITATE ACCESS & MAINTENANCE IN LINE WITH MANUFACTURERS RECOMMENDATIONS AND GOOD PRACTICE GUIDES.
5	ALL EQUIPMENT SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURERS GUIDELINES
6	ALL DETAILS ARE APPLICABLE TO EVERY DRAWING UNLESS INDICATED OTHERWISE
7	THE CONTRACTOR SHALL INCLUDE TO IDENTIFY THE COMPLETE EXISTING ELECTRICAL INSTALLATION. EXTEND AND ADAPT TO FACILITATE THE PROPOSED WORKS

DRAWING NOTES	
SYMBOL	DESCRIPTION
	THE CONTRACTOR SHALL INCLUDE FOR A PROVISIONAL SUM FOR 50m OF EXTRA TRENCH WORK IN CASE OF ROUTE DIVERSIONS UPON FURTHER SURVEY

T2	GENERAL NOTES AMENDED, NOTE ADDED	J.P.	July 2025
T1	TENDER ISSUE.	J.P.	July 2025
Rev.	Description	Revised By	Date

STATUS	
TENDER	

Building Services Consulting Engineers
148 Beaufort Road
Crewe, Cheshire, SK9 2DP
Tel: 0129 558 9500
Web Site: www.ecs-ecs.co.uk Email: sales@ecs-ecs.co.uk

JOB NO. 27/014/2	DRAWING NO. 27/014/2/E/06	COMPUTER FILE 27_014_2_E_06	REVISION T2
DATE July 2025	SCALE 1:100 @ A0	DRAWN G.P.	CHECKED D.B.

FOR THE
Westwood College, Leek
E3 Cube
Phase 2

DRAWING TITLE
Site Layout