


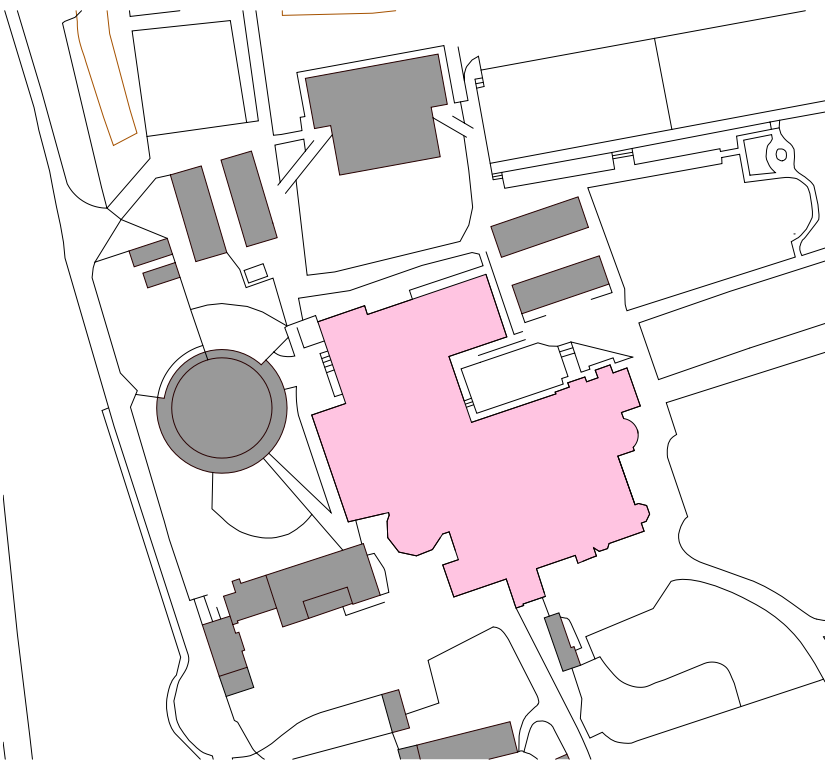

Ground Floor Internal Doors Schedule as Proposed

Door Number	From Room: Number	Door Type	Wider S/O Required	S/O		Door		Ironmongery		Handle Type	Signage Type	Set No.	Leaf Finish	Frame Finish	Comments	
				Width	Height	Fire Door	Visio n Panel	Closer/Hold Type	Lock Type							
Interior																
A G 03	102	6a	NO	1010	2160	YES	YES	SC	Sashlock - Anti Barricade	Lever	FDKS	(none)	Veneer	White gloss	Paxton controls to be added. Fob in, push button out. Varnish or gloss finish to be confirmed.	
A G 04	Corridor	6f	NO	735	2075	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 06	Corridor	6d	NO	880	1994	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 07	Corridor	6d	NO	1210	2100	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 08	Corridor	6d	NO	1210	2100	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 09	Corridor	6f	NO	1000	1916	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 10	Corridor	6c	NO	1210	2100	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 11	107	6c	NO	1210	2100	YES	YES	SC	Sashlock - Anti Barricade	Lever	FDKS	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 12	108	6c	NO	1210	2100	YES	YES	SC	Sashlock - Anti Barricade	Lever	FDKS	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 13	Corridor	6c	NO	1210	2100	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 14	Store	6b	NO	710	2010	YES	NO	None	Deadlock - Key/Thumb turn	Lever	FDKL	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 15	Girl's Changing Room	6b	NO	1010	2110	YES	NO	SC	Deadlock - Key/Thumb turn	Push/Pull	FDKS	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 16		6b	NO	910	2110	YES	NO	None	Deadlock - Key/Thumb turn	Lever	FDKL	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 17		6f	NO	1510	2100	YES	NO	None	Deadlock - Key/Thumb turn	Lever	FDKL	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 18	109	6b	NO	810	2110	YES	NO	None	Deadlock - Key/Thumb turn	Lever	FDKL	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 21	111a	6b	NO	1020	2190	YES	NO	None	Deadlock - Key/Thumb turn	Lever	FDKL	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 23	Corridor	6e	NO	880	2021	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 24	Corridor	6e	NO	800	2067	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 25	113	6b	NO	910	2110	YES	NO	None	Deadlock - Key/Thumb turn	Push/Pull	FDKS	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 26	Corridor	6d	NO	1210	2100	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 27	115	4f	NO	1895	1935	YES	YES	SC	Sashlock - Anti Barricade	Lever	FDKS	(none)	Veneer	White gloss		
A G 28	115	4f	NO	1895	1935	YES	YES	SC	Sashlock - Anti Barricade	Lever	FDKS	(none)	Veneer	White gloss		
A G 29	Corridor	4a	NO	1810	2100	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss		
A G 30		1	NO	830	2010	YES	NO	None	Deadlock - Key/Thumb turn	Lever	FDKL	(none)	Veneer	White gloss		
A G 31		1	NO	1010	2010	YES	NO	None	Deadlock - Key/Thumb turn	Lever	FDKL	(none)	Veneer	White gloss		
A G 32	117	1	NO	910	2010	YES	NO	None	Deadlock - Key/Thumb turn	Lever	FDKS	(none)	Veneer	White gloss		
A G 33	121	2a	NO	910	2110	YES	YES	SC	Sashlock - Anti Barricade	Lever	FDKS	(none)	Veneer	White gloss		
A G 34	117	1	NO	810	2110	YES	NO	None	Deadlock - Key/Thumb turn	Lever	FDKS	(none)	Veneer	White gloss		
A G 35	117a	1	NO	810	2110	YES	NO	None	Deadlock - Key/Thumb turn	Lever	FDKS	(none)	Veneer	White gloss		
A G 36	Corridor	3f		1210	2100	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss		
A G 37	115a	2a	NO	930	2080	YES	YES		Panic bar	None	FDKS	(none)	Veneer	White gloss	Internal thumb turn to be included.	
A G 38	118	2a	NO	810	2010	YES	YES	SC	Sashlock - Anti Barricade	Lever	FDKS	(none)	Veneer	White gloss		
A G 39	Corridor	2a	NO	910	2010	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss		
A G 40	118	1	NO	850	2025	YES	NO	None	Deadlock - Key/Thumb turn	Lever	FDKL	(none)	Veneer	White gloss		
A G 41	Store B	1	NO	910	2050	YES	NO	None	Deadlock - Key/Thumb turn	Lever	FDKL	(none)	Veneer	White gloss		
A G 42	Store A	1	NO	810	2110	YES	NO	None	Deadlock - Key/Thumb turn	Lever	FDKL	(none)	Veneer	White gloss		
A G 43	120	2a	NO	910	2110	YES	YES	SC	Sashlock - Anti Barricade	Lever	FDKS	(none)	Veneer	White gloss		
A G 44	Corridor	4d		1588	1918	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss		
A G 45		1	NO	1010	2110	YES	NO	None	Deadlock - Key/Thumb turn	Push/Pull	FDKL	(none)	Veneer	White gloss		
A G 46	123	2a	NO	1010	2110	YES	YES	SC	Sashlock - Anti Barricade	Lever	FDKS	(none)	Veneer	White gloss		
A G 47	123a	2a	NO	1010	2110	YES	YES	SC	Sashlock - Anti Barricade	Lever	FDKS	(none)	Veneer	White gloss		
A G 48	112b	6b	NO	585	2360	YES	NO	None	Deadlock - Key/Thumb turn	Lever	FDKL	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 49	120a	1	NO	810	2010	YES	NO	None	Deadlock - Key/Thumb turn	Lever	FDKL	(none)	Veneer	White gloss		
A G 52	102	6a	NO	810	2110	YES	YES	SC	Sashlock - Anti Barricade	Push/Pull	FDKS	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.	
A G 53		6h	NO	1500	2100	YES	NO	None	Deadlock - Key/Thumb turn	Lever	FDKL	(none)	Veneer	White gloss	Location to be confirmed within room 114. Varnish or gloss paint finish to be cofirmed.	
A G 54		6h	NO	1500	2100	YES	NO	None	Deadlock - Key/Thumb turn	Lever	FDKL	(none)	Veneer	White gloss	Location to be confirmed within room 114. Varnish or gloss paint finish to be cofirmed.	
Grand total: 46																

Ground Floor External Doors Schedule as Proposed

Door Number	From Room: Number	Door Type	Wider S/O Required	S/O		Door		Ironmongery		Lock Type	Handle Type	Signage Type	Set No.	Leaf Finish	Frame Finish	Comments
				Width	Height	Fire Door	Vision Panel	Closer/Hold Type								
Exterior																
A G 55		EX2	NO	785	1875	YES	NO	None	Deadlock - Key/Thumb turn	Lever	FDKL	(none)	PPC, RAL TBC	PPC, RAL TBC.	Location to be confirmed within chimney off room 111. Timber door assembly with painted finish.	
Grand total: 1																

Notes

1. This drawing is subject to Copyright all rights reserved.
2. All existing dimensions should be checked on site before commencement of the work, any discrepancies to be reported to E3 Cube Ltd.
3. Figured dimensions are to be used in all case.

Ground Floor Works on External Existing Doors to be Retained Schedule

	From Room: Number	S/O		
Door Number	Number	Width	Height	Comments
Exterior				
A G 01	Corridor	1310	2110	Refer to Door Schedule Report for refurbishment details. Paxton control to be added. Fob outside and fob inside with green break glass override.
A G 50	110	1010	2100	Refer to Door Schedule Report for refurbishment details.
A G 51	106	1510	2100	Refer to Door Schedule Report for refurbishment details. Paxton control to be added. Fob outside, push button inside.
Grand total: 3				

Ground Floor Works on Existing Internal Doors to be Retained Schedule

	From Room: Number	S/O		Comments
Door Number	Width	Height		
Interior				
A G 02	101	1110	2210	Refer to Door Schedule Report for refurbishment details.
A G 05	Corridor	940	2050	Refer to Door Schedule Report for refurbishment details.
A G 19	109	1510	2100	Refer to Door Schedule Report for refurbishment details.
A G 20	Corridor	1210	2210	Refer to Door Schedule Report for refurbishment details.
A G 22	Corridor	1020	2190	Refer to Door Schedule Report for refurbishment details.
Grand total: 5				

P03	Planning Issue.	10/06/2025
P02	Issued to M&E.	29/05/2025
P01	Issued to Client for review.	07/05/2025
Rev.	Revision Description	Date



Client
Talentum Learning Trust
Westwood College, Westwood Park Dr, Leek
ST13 8NP

Project
Westwood College Fire Safety Works
Westwood College, Westwood Park Dr, Leek
ST13 8NP

Title
Block A Ground Floor Proposed Door Schedule

Status Code - Purpose of Issue
A3 - Planning Issue

E3C Job No.	Scale	Size	Drawn	Checked	Approved
1748	1 : 1500	@A1	SH	MB	E3C

Drawing No.
WST02A-E3C-32-XXX-DR-B-001
Project-Originator-Functional-Breakdown-Spatial-Breakdown-Form-Discipline-Number

