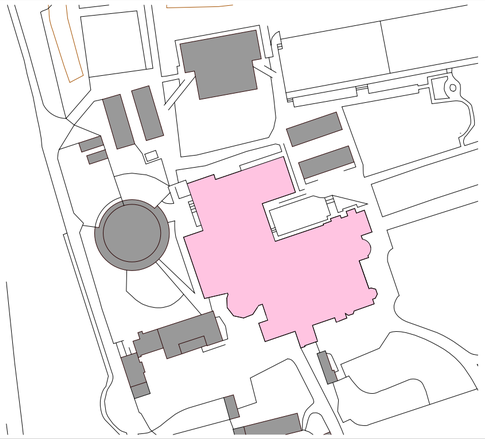

Works on Existing Internal Doors to be Retained Schedule

Door Number	From Room: Number	S/O Width	S/O Height	Comments
Interior				
A 01 03	146	940	2110	Refer to Door Schedule Report for refurbishment details.
A 01 04	144	1010	2190	Refer to Door Schedule Report for refurbishment details.
A 01 09	141	1010	2010	Refer to Door Schedule Report for refurbishment details.
A 01 12	139	940	2110	Refer to Door Schedule Report for refurbishment details.
A 01 15	135	940	2110	Refer to Door Schedule Report for refurbishment details.
A 01 19	133	940	2110	Refer to Door Schedule Report for refurbishment details.
A 01 21	Corridor	910	2110	Refer to Door Schedule Report for refurbishment details.
A 01 07	Corridor	1010	2050	Refer to Door Schedule Report for refurbishment details.
Grand total: 8				

Notes

1. This drawing is subject to Copyright all rights reserved.
2. All existing dimensions should be checked on site before commencement of the work, any discrepancies to be reported to E3 Cube Ltd.
3. Dimensions should not be scaled from drawing.
4. Figured dimensions are to be used in all case.

Internal Doors Schedule as Proposed

Door Number	From Room: Number	Door Type	Wider S/O Required	S/O Width	S/O Height	Door Fire Door	Door Vision Panel	Ironmongery Closer/Hold Type	Lock Type	Handle Type	Signage Type	Set No.	Leaf Finish	Frame Finish	Comments
Interior															
A 01 01	Corridor	6g	NO	876	1868	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.
A 01 02	Corridor	6e	NO	727	2100	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.
A 01 05	Corridor	6g	NO	830	1859	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.
A 01 06	145	6a	NO	910	2010	YES	YES	SC	Sashlock - Anti Barricade	Lever	FDKS	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.
A 01 08	143	6a	NO	850	2050	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.
A 01 10	139	6a	NO	1010	2010	YES	YES	SC	Sashlock - Anti Barricade	Lever	FDKS	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.
A 01 11	Corridor	6e	NO	750	2100	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.
A 01 13		6b	NO	710	2110	YES	YES	None	Deadlock - Key/Thumb turn	Lever	FDKL	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.
A 01 14	136	6a	NO	1010	2110	YES	YES	None	Sashlock - Anti Barricade	Lever	FDKS	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.
A 01 16	Corridor	6e	NO	788	1910	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.
A 01 17	134	6a	NO	910	2110	YES	YES	SC	Sashlock - Anti Barricade	Lever	FDKS	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.
A 01 18	134	6a	NO	810	2010	YES	YES	SC	Sashlock - Anti Barricade	Lever	FDKS	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.
A 01 20	Corridor	6e	NO	745	1960	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.
A 01 22	150	2a	NO	940	2110	YES	YES	SC	Sashlock - Anti Barricade	Lever	FDKS	(none)	Veneer	White gloss	
A 01 23	151	2a	NO	1010	2110	YES	YES	SC	Sashlock - Anti Barricade	Lever	FDKS	(none)	Veneer	White gloss	
A 01 24	152	2a	NO	910	2010	YES	YES	SC	Sashlock - Anti Barricade	Lever	FDKS	(none)	Veneer	White gloss	
A 01 26	154	2a	NO	960	2077	YES	YES	SC	Sashlock - Anti Barricade	Lever	FDKS	(none)	Veneer	White gloss	
A 01 25	16	4d	NO	1588	1978	YES	YES	MagHO	None	Push/Pull	AFDKC	(none)	Veneer	White gloss	
A 01 27	179	1	NO	870	2100	YES	NO	None	Deadlock - Key/Thumb turn	Lever	FDKL	(none)	Veneer	White gloss	
A 01 28	Corridor	6a	NO	940	2100	YES	YES	MagHO	Deadlock - Key/Thumb turn	Lever	AFDKC	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.
A 01 29	138	6a	NO	810	2010	YES	YES	SC	Sashlock - Anti Barricade	Push/Pull	FDKS	(none)	Veneer	White gloss	Varnish or gloss paint finish to be confirmed.
Grand total: 21															

First Floor External Doors Schedule as Proposed

Door Number	From Room: Number	Door Type	Wider S/O Required	S/O Width	S/O Height	Door Fire Door	Door Vision Panel	Ironmongery Closer/Hold Type	Lock Type	Handle Type	Signage Type	Set No.	Leaf Finish	Frame Finish	Comments
Exterior															
A 01 30	136	EX1	NO	910	2110	YES	YES	SC	Panic bar	None	Fire Exit	(none)	PPC. RAL TBC	PPC. RAL TBC.	Panic bar to be installed. Door to be FD 30 steel door.Powder coated finish RAL to match existing.
Grand total: 1															

Rev.	Revision Description	Date
P03	Planning Issue.	10/06/2025
P02	Issued to supplier.	30/05/2025
P01	Issued to Client for review.	07/05/2025

E3 CUBE "Delivering Aspirations"
Unit 23, Meridian Business Village, Hansby Drive, Liverpool, L24 9LG
Tel +44 (0) 3333 058 291
www.e3cube.co.uk

Client
Talentum Learning Trust
Westwood College, Westwood Park Dr, Leek
ST13 8NP

Project
Westwood College Fire Safety Works
Westwood College, Westwood Park Dr, Leek
ST13 8NP

Title
Block A First Floor Proposed Door Schedule

Status Code - Purpose of Issue: A3- Plannng Issue
Rev.: P03

E3C Job No.	Scale	Size	Drawn	Checked	Approved
1748	1 : 1500	@A2	SH	MB	E3C

Drawing No.
WST02A-E3C-32-XXX-DR-B-002
Project-Originator-FunctionalBreakdown-SpatialBreakdown-Form-Discipline-Number

Scale 1:1 50mm 40 30 20 10 0