


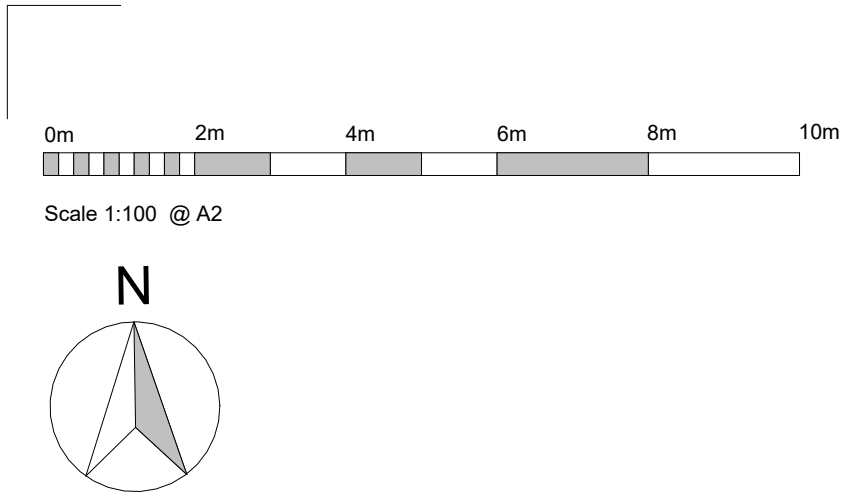

- DEMOLITION NOTES**
- Generally:**
- GD1:** All redundant building services (including redundant rainwater goods) to be removed, both internally and externally mounted
- GD2:** Works to car park as required to install new drainage connections, TBC by Civil Engineer
- Existing/to be retained
- Elements to be removed
- Floor structure, including groundworks/foundations, to be removed

- Notes**
- D1:** Window removed
- D2:** Window removed and structural opening widened (with lintel/structural works as required)
- D3:** Window removed and structural opening increased to full height to allow for doorway
- D4:** New door height structural opening in existing wall
- D5:** Door/gate to be removed
- D6:** Door removed and structural opening widened (with lintel/structural works as required)
- D7:** Staircase removed
- D8:** Sanitaryware removed
- D9:** Partitions and finishes removed, including doors/frames/architraves
- D10:** Shallow excavation for platform lift pit (c.150mm)
- D11:** Existing structural opening widened
- D12:** Raised stage to be removed
- D14:** External masonry boundary wall truncated (c. 1m to be carefully taken down)
- D15:** Existing roof covering and structure to be removed
- D16:** Parapet to be removed
- D17:** Metal railing to be removed
- D18:** Rooflight to be removed
- D19:** Formation of shaft in existing floor/roof with structural bracing as required (c. 2mx2m)
- D20:** Formation of opening in existing roof for installation of rooflight
- D21:** Existing kitchenette, with associated redundant plumbing, cabinetry and finishes to be removed
- D22:** Removal of roof coverings and structural alterations to facilitate floorplate extension, including removal of leaded valley gutter detail
- D23:** Formation of opening in existing floor to allow for staircase, with structural bracing as required.
- D24:** Door to be replaced with new timber fire door, modelled on historic door style


| Window Demolition Schedule<br>(First Floor) |  |
|---------------------------------------------|--|
| Window No.                                  |  |
| W1.16                                       |  |
| W1.17                                       |  |
| W1.18                                       |  |
| W1.19                                       |  |
| W1.24                                       |  |
| W1.25                                       |  |
| W1.26                                       |  |
| W1.27                                       |  |
| W1.28                                       |  |
| W1.29                                       |  |
| W1.30                                       |  |
| W1.31                                       |  |
| W1.32                                       |  |
| W1.33                                       |  |
| W1.34                                       |  |
| W1.35                                       |  |
| W1.36                                       |  |
| W1.37                                       |  |
| W1.38                                       |  |
| W1.39                                       |  |
| W1.40                                       |  |
| Grand total: 21                             |  |

| Door Demolition Schedule<br>(First Floor) |  |
|-------------------------------------------|--|
| Door No.                                  |  |
| D1.17                                     |  |
| D1.18                                     |  |
| D1.21                                     |  |
| D1.22                                     |  |
| D1.23                                     |  |
| D1.24                                     |  |
| D1.25                                     |  |
| D1.26                                     |  |
| D1.27                                     |  |
| D1.28                                     |  |
| D1.29                                     |  |
| D1.30                                     |  |
| D1.31                                     |  |
| D1.32                                     |  |
| D1.33                                     |  |
| D1.34                                     |  |
| D1.35                                     |  |
| D1.36                                     |  |
| Grand total: 18                           |  |

© This drawing and the building works depicted are the copyright of the Architect and may not be reproduced except with written consent. Figured dimensions only are to be taken from this drawing. All contractors must visit the site and be responsible for taking and checking all dimensions relative to their work. Lathams are to be advised of any variation between drawings and site conditions.

Quality Assurance  
REGISTERED FIRM  
ISO 9001:2008

Quality Assurance  
REGISTERED FIRM  
ISO 14001:2004

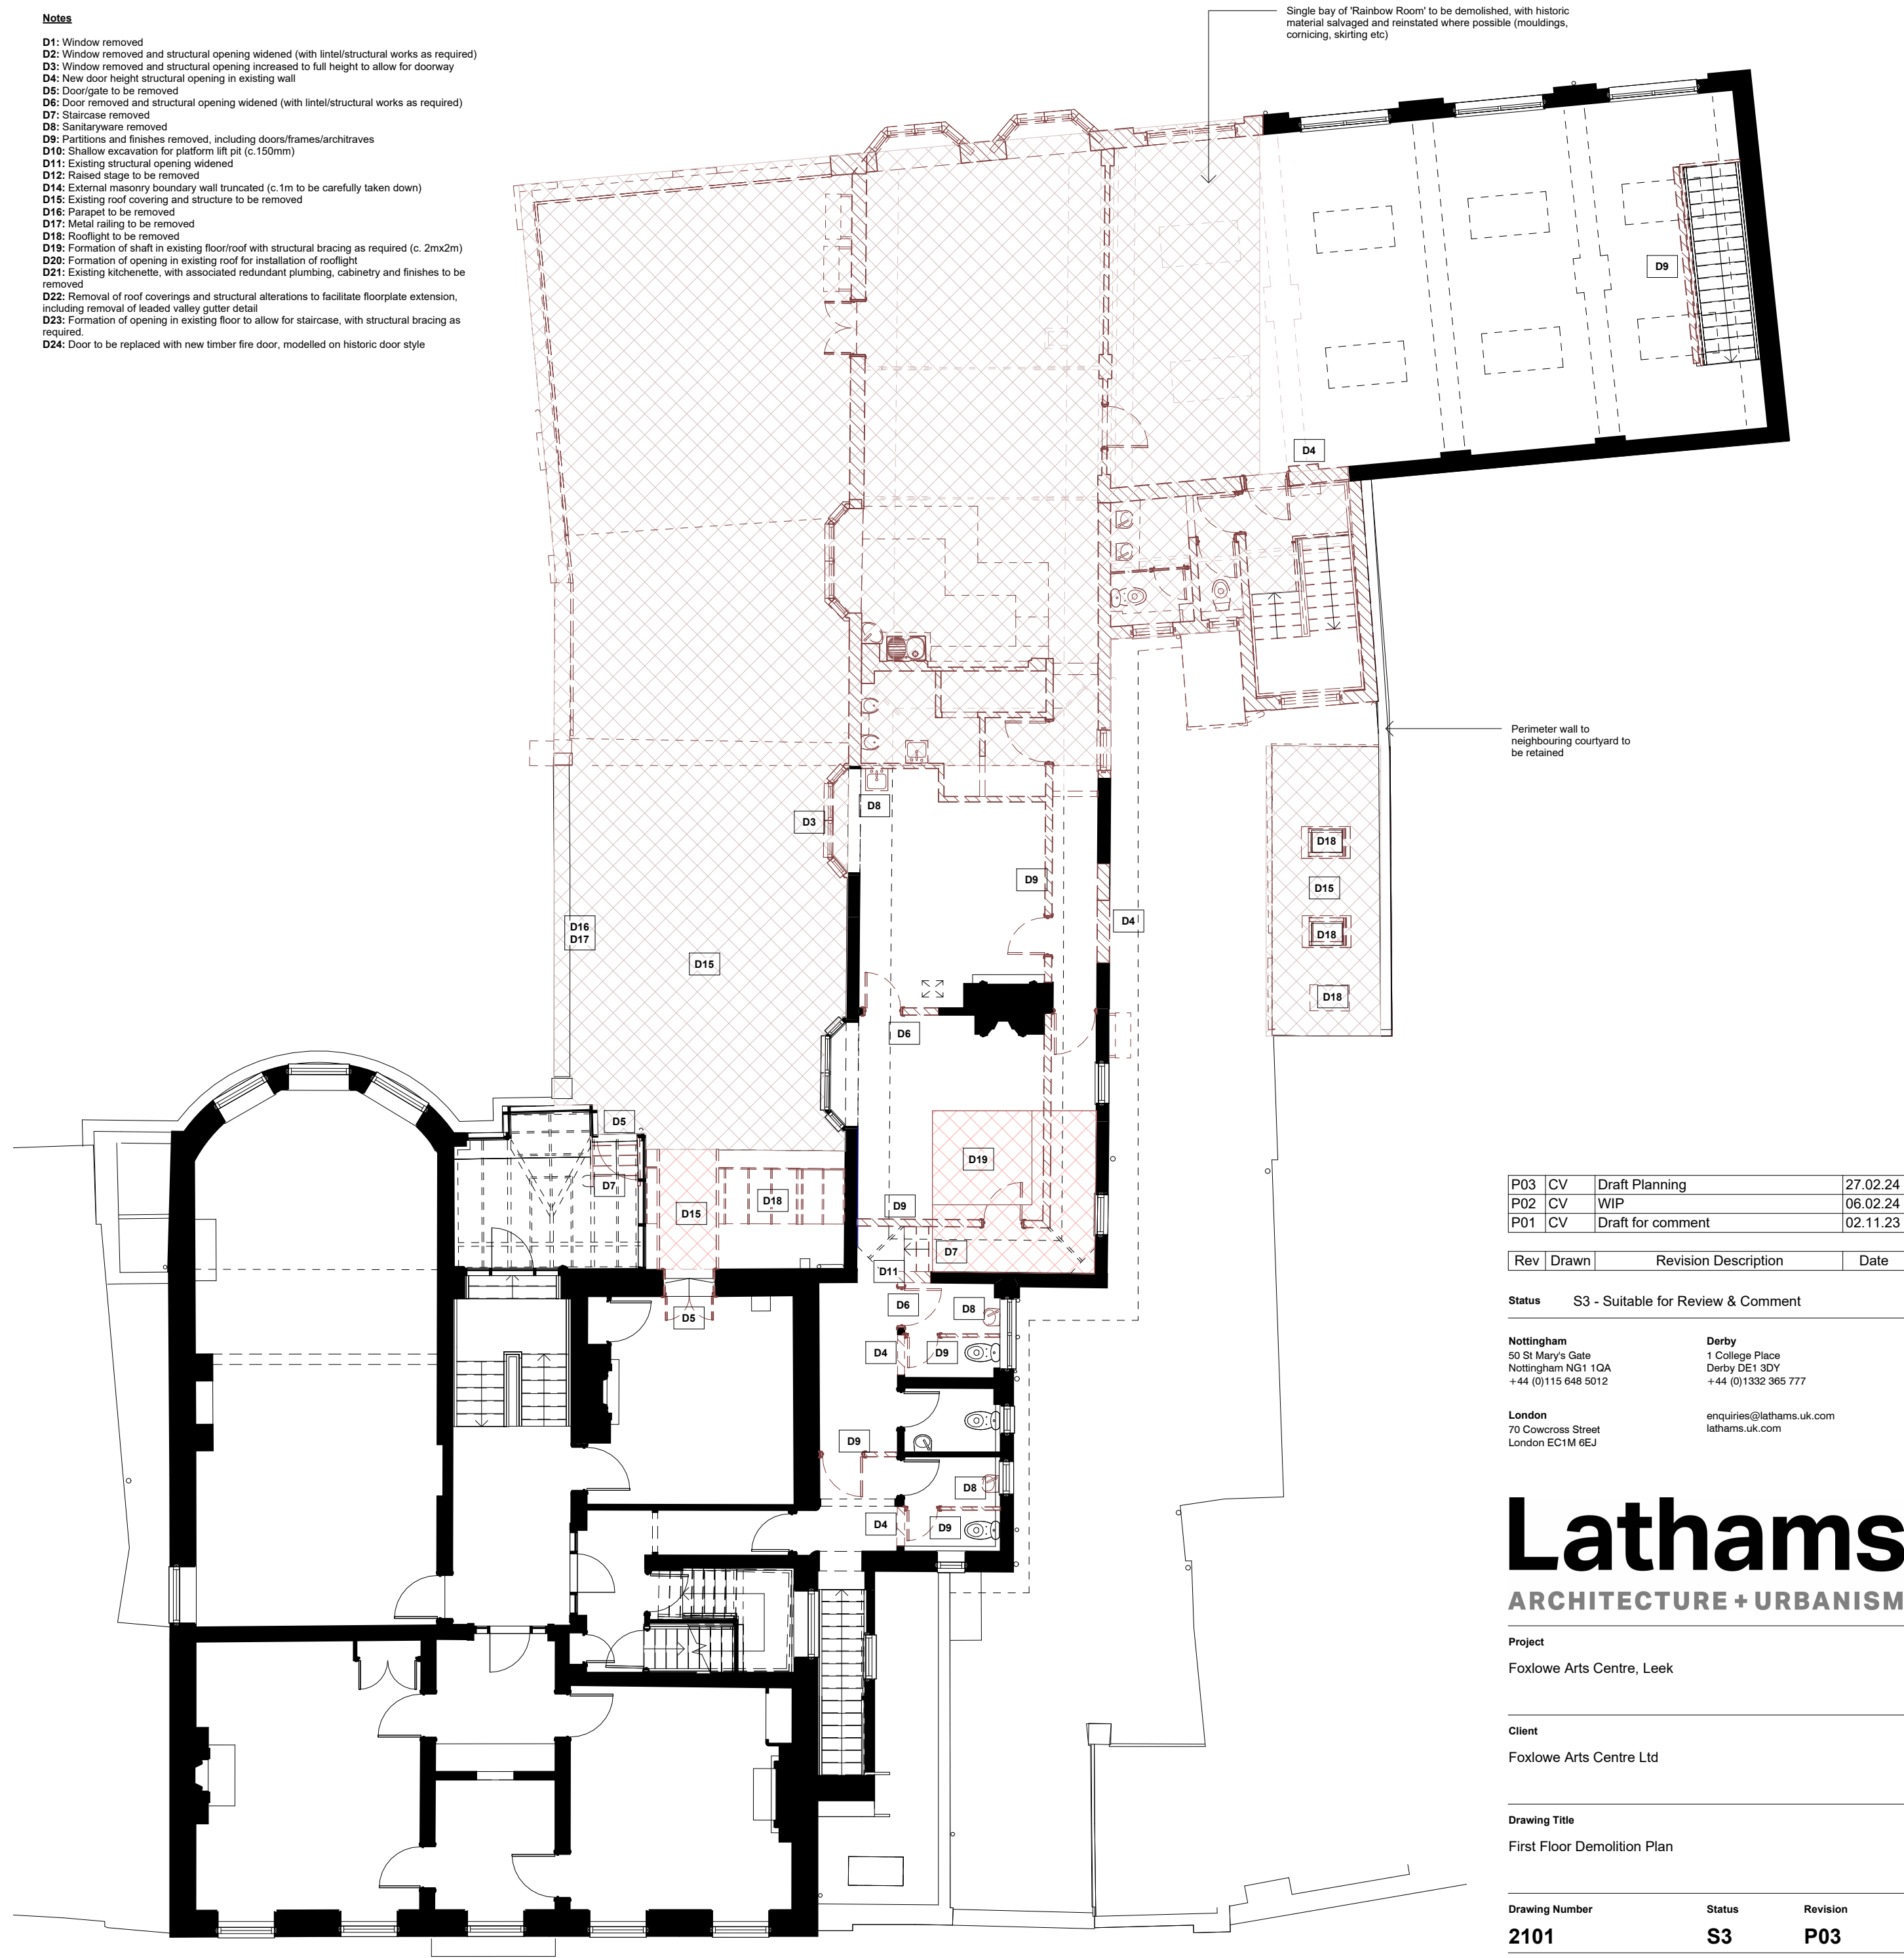

01 - First Floor Demolition Plan

1 : 100