
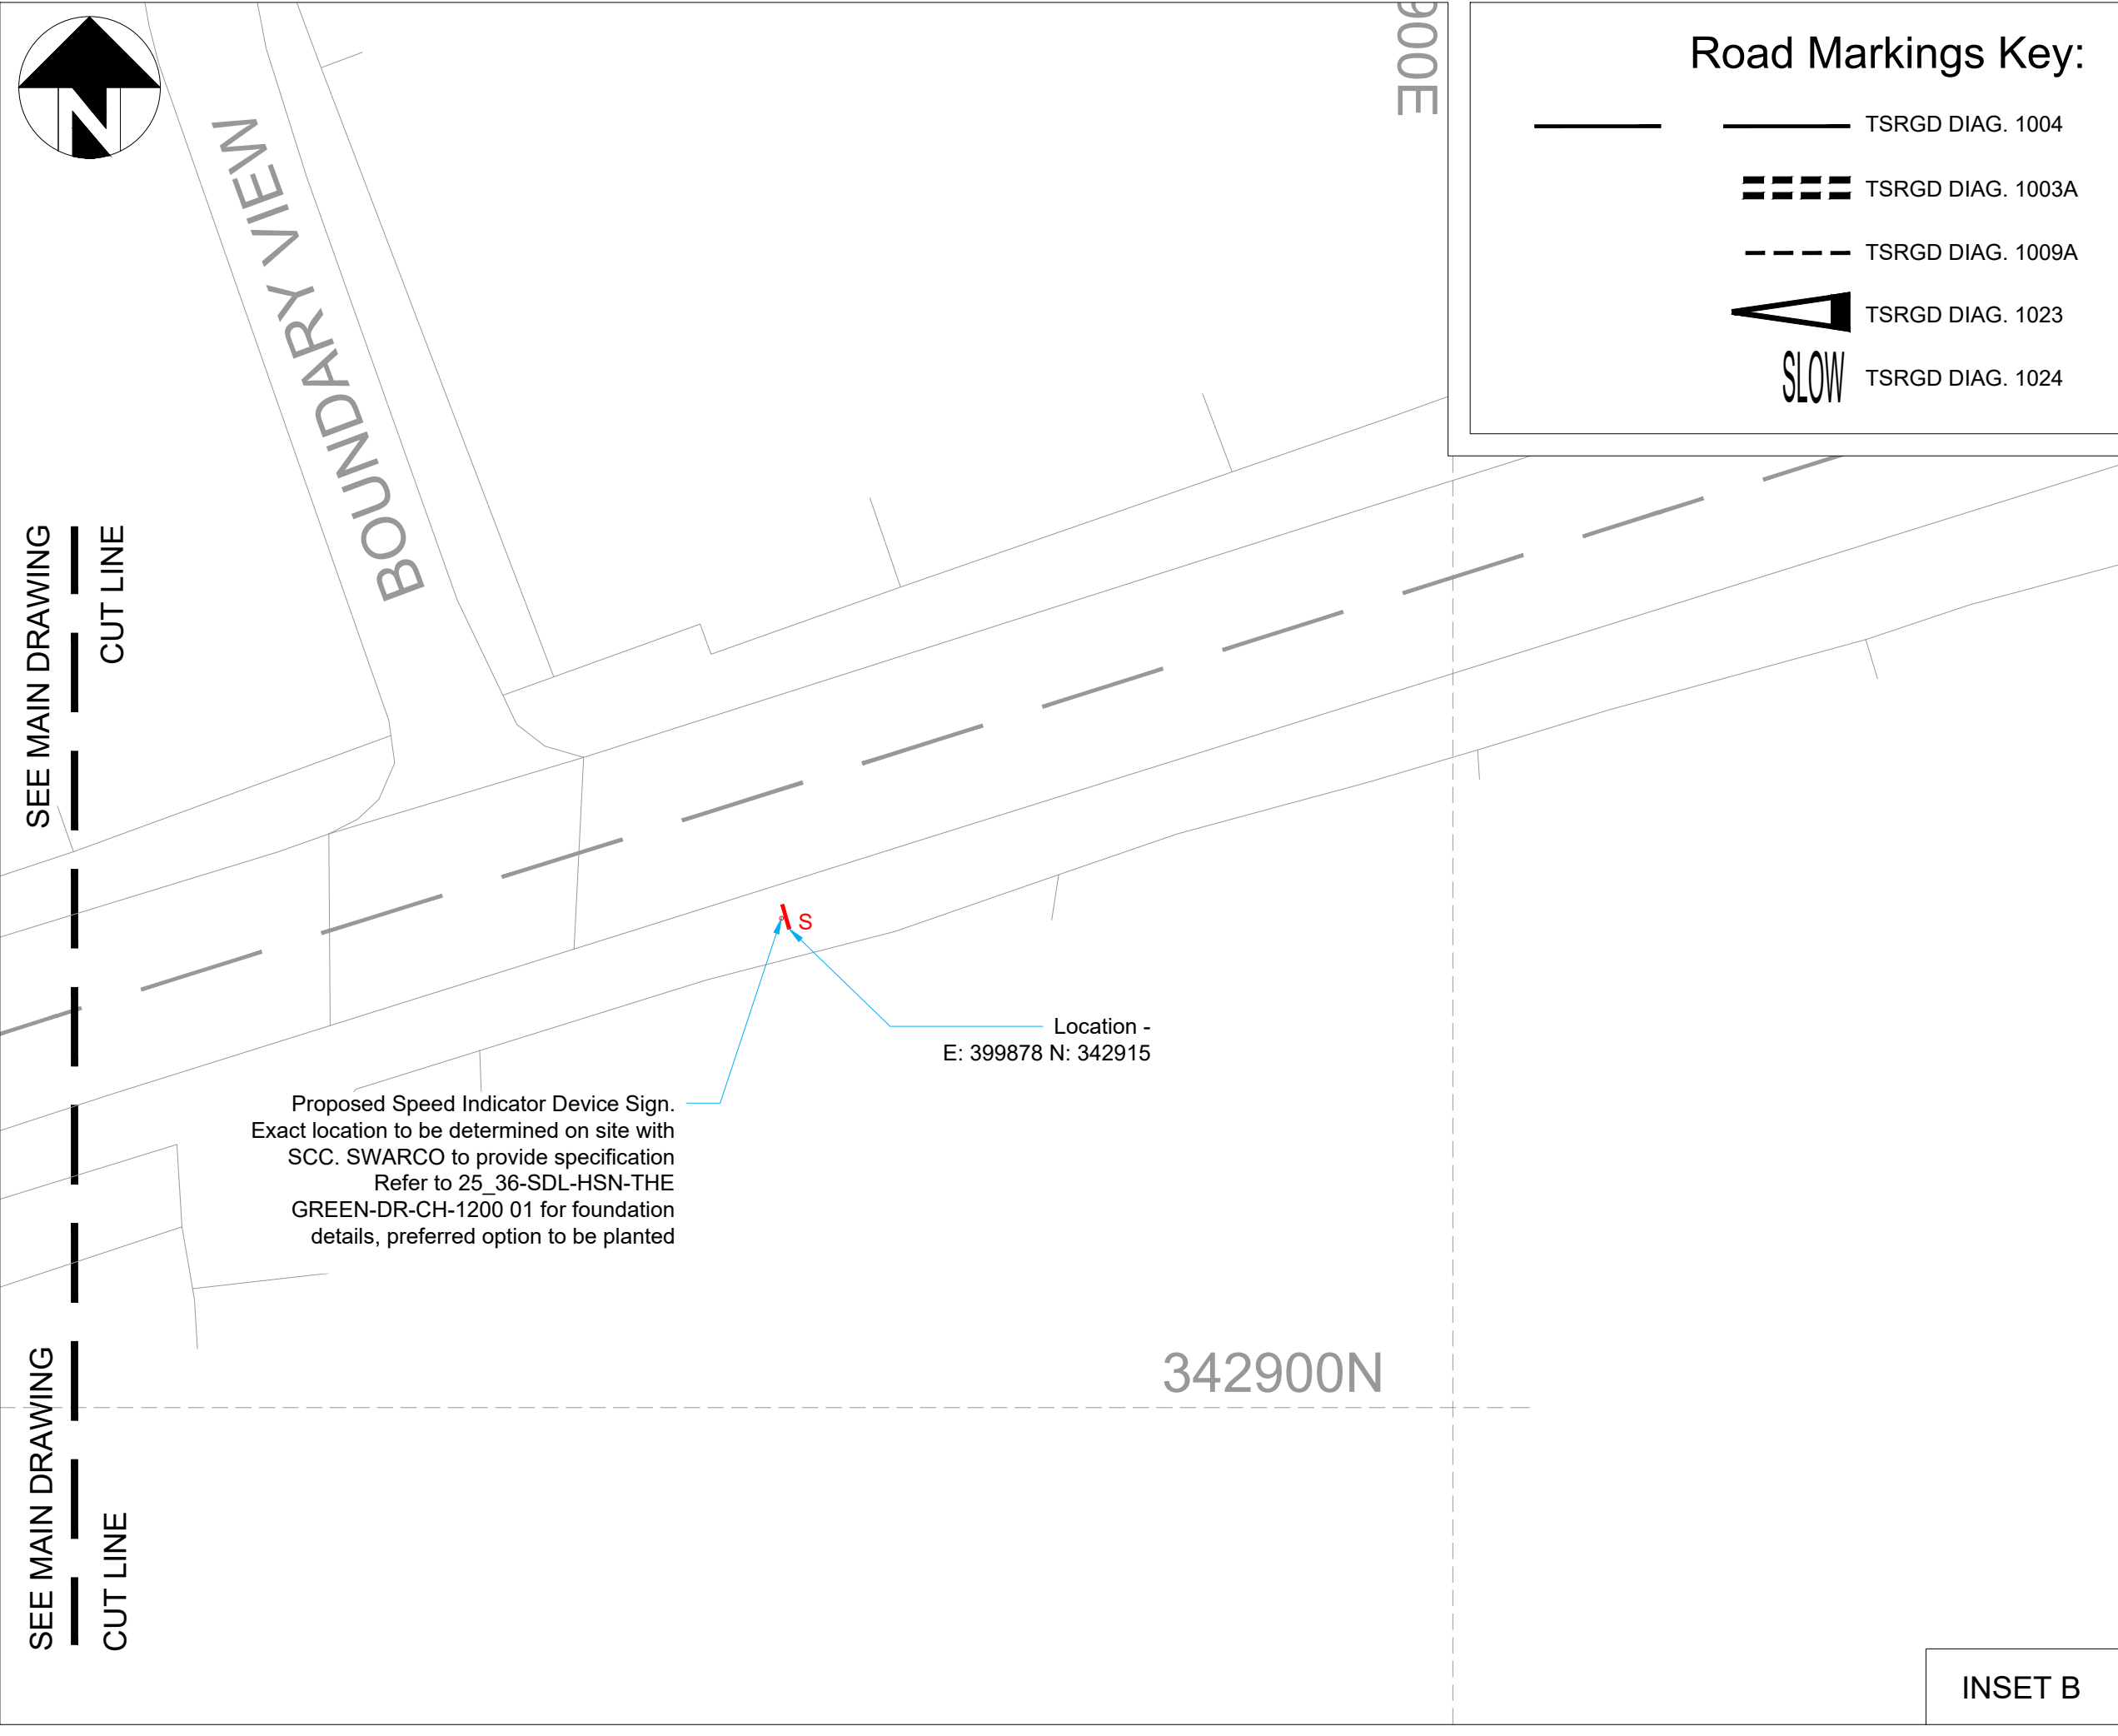
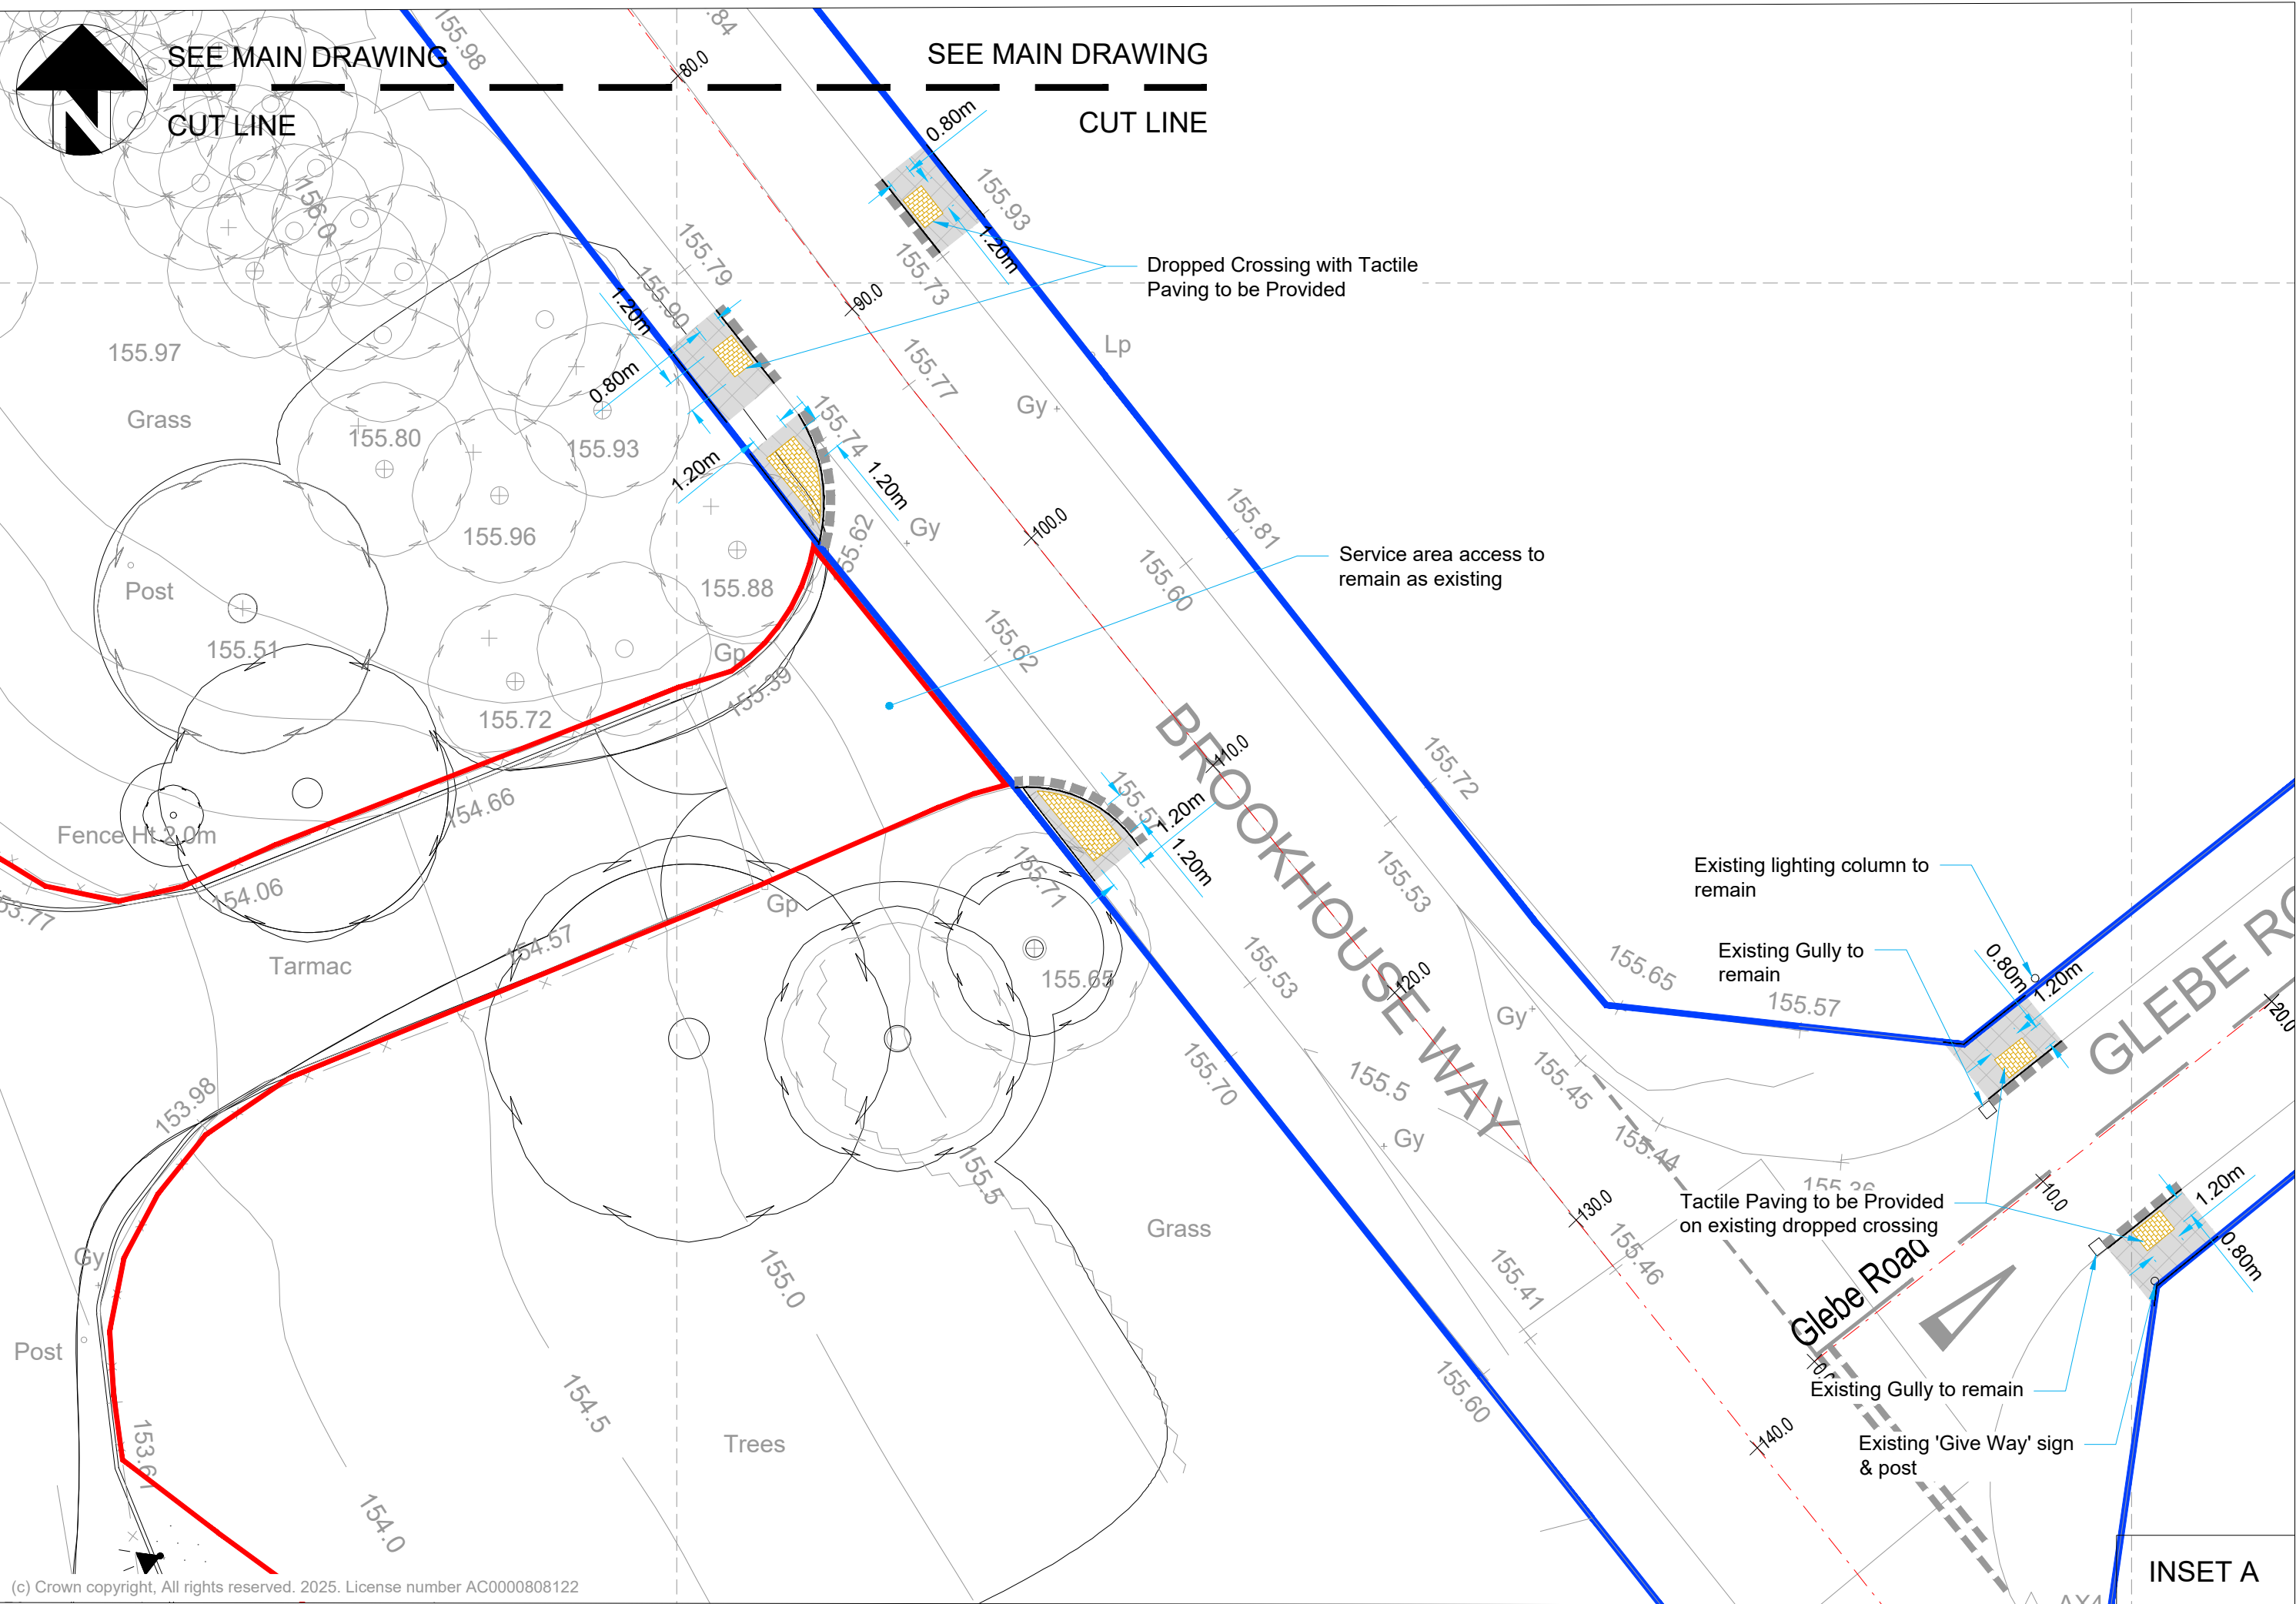
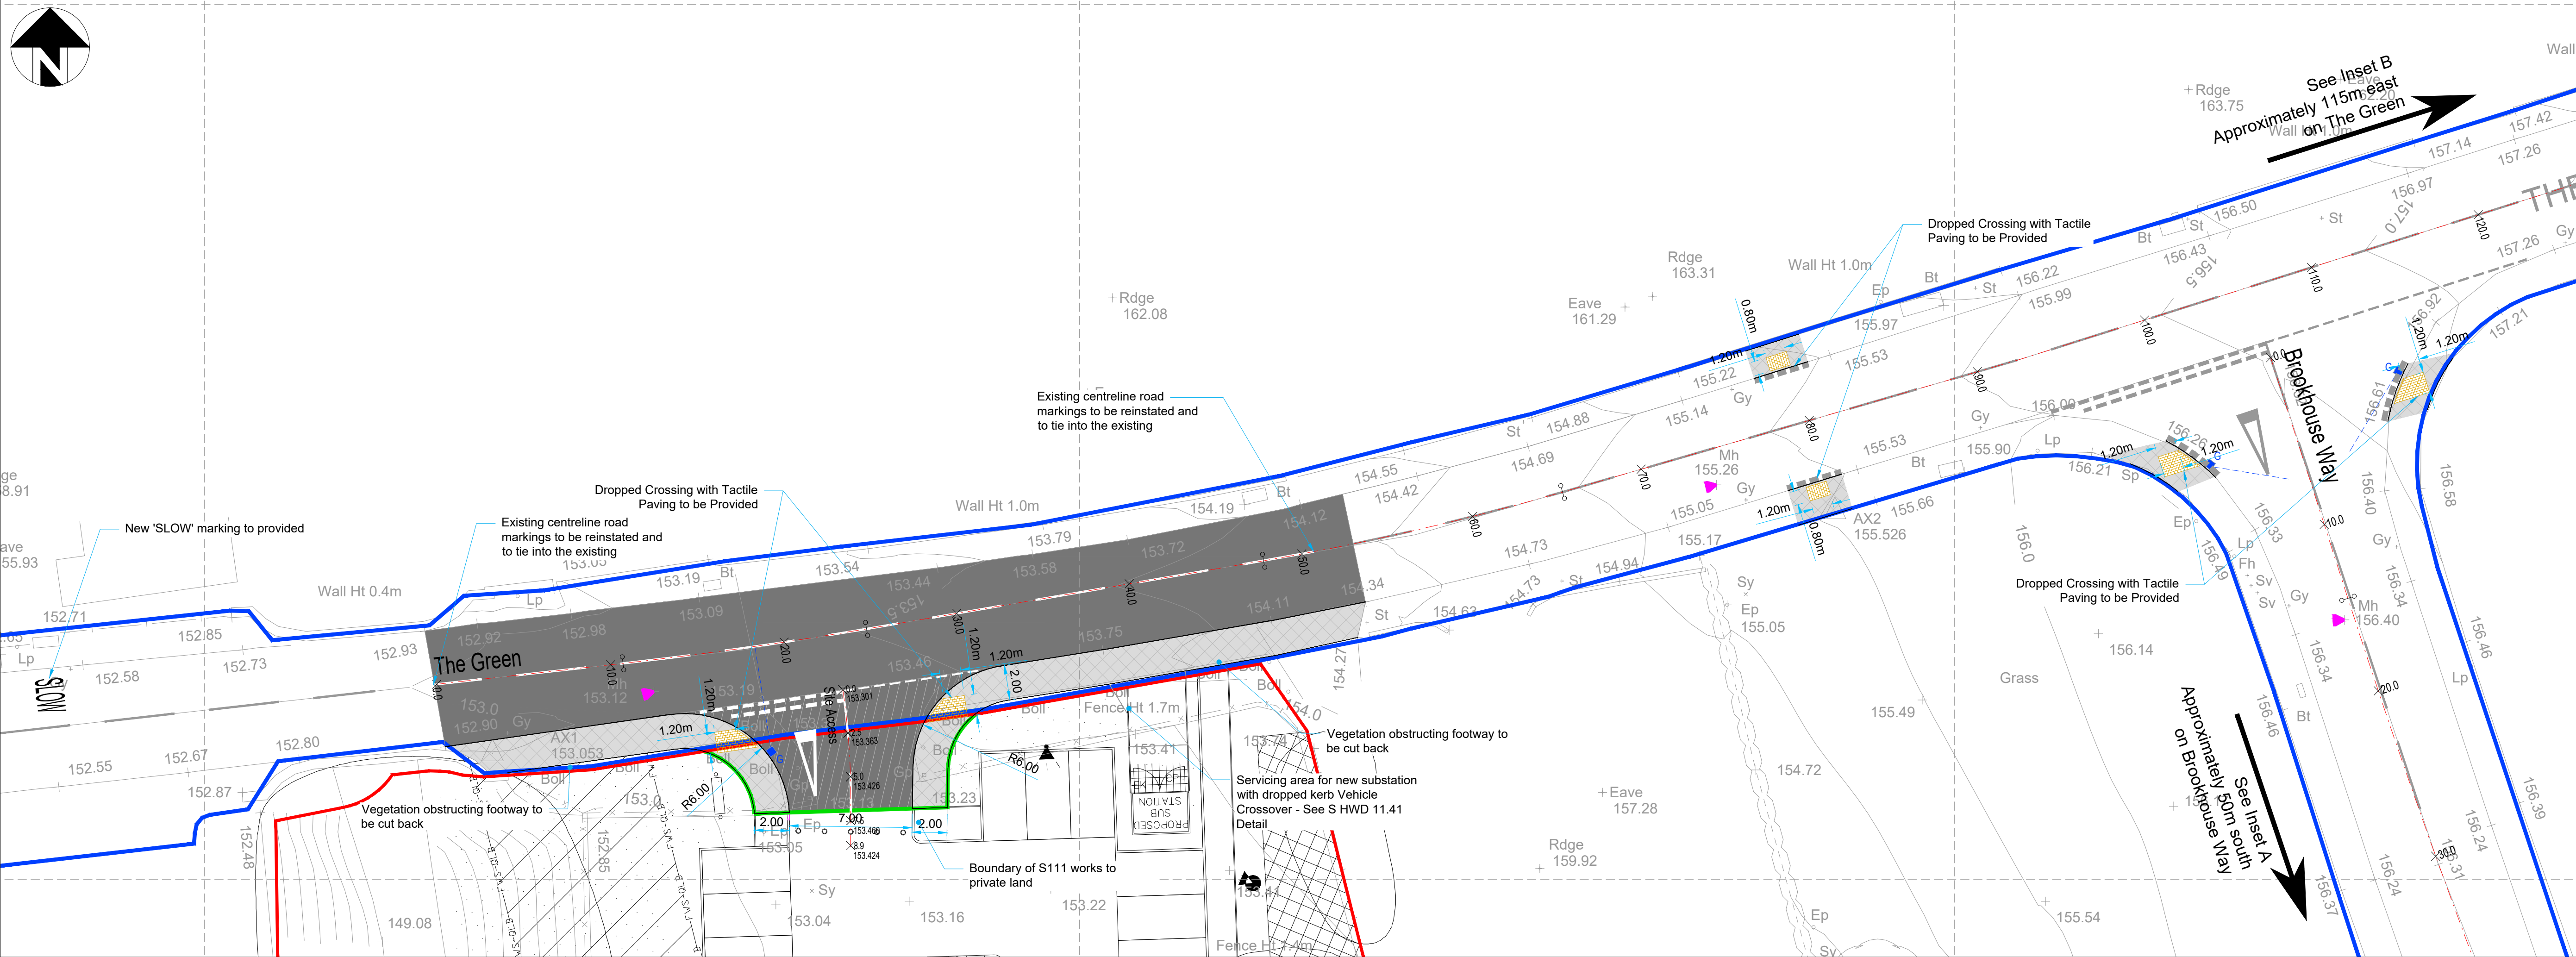




- NOTES**
1. All dimensions are in metres unless noted otherwise.
 2. All dimensions & levels to be checked by the contractor prior to commencement of work, any discrepancy shall be reported immediately to the engineer.
 3. Underground services are present in the area, contractor is to confirm the precise line and depth of any services prior to the commencement of any excavation works.
 4. All work shall be carried out in accordance with local authority, statutory authority, health & safety requirements and regulations.
 5. The drawings shall be read in accordance with all other contract documents relevant at that time of issue and during the period of the contract.
 6. The contractor must ensure the overall stability of the works is adequate at all stages of the construction.
 7. All chamber covers, valve boxes etc., situated within the works to be raised/lowered to match proposed levels where necessary.
 8. All setting out shall be agreed on site with the overseeing organisation.
 9. All works are to be in accordance with the Staffordshire County Council Highways Design Guide and the Specification for Highway Works.
 10. If any discrepancies between technical drawings are found, the highway authority is to be notified.
 11. All works are to comply with the latest revision of SCC's base specification and highway works detail unless otherwise agreed with the highway authority.
 12. No works may take place within the highway until a permit to dig has been granted. One permit to dig is required for each named road.
 13. This drawing is to be read in conjunction with all technically approved drawings.
 14. The nature and extents of any pavement tie in works shown are indicative only with the details to be confirmed when the existing pavement composition is confirmed.

KEY

Road Markings Key:

- TSRGD DIAG. 1004
- TSRGD DIAG. 1003A
- TSRGD DIAG. 1009A
- ▲ TSRGD DIAG. 1023
- ▲ SLOW TSRGD DIAG. 1024

Legend:

- Site Boundary
- Existing Highway Boundary
- Proposed Highway Boundary
- Proposed new kerbing
- Existing carriageway to be partially reconstructed to existing levels. Refer to AMA/45030/S111/011 Pavement Type 2 for details
- Carriageway reinstatement at new kerbs as per Appendix 11/1 of SCC Base Spec and HWD 07.09
- Carriageway construction refer to AMA/45030/S111/011 Pavement Type 1 for details
- New Footway construction refer to AMA/45030/S111/011 Footway Type 2 for details
- Precast concrete Blister Tactile. Refer to AMA/45030/S111/006 & 011 Type 4 Footway for details and Blocks per SCC Base Spec 11.37
- Proposed Gully Locations
- Existing manhole to remain as existing
- New SID Sign & Post to be provided. Exact location TBC

Rev	Description	Date	By
P09	Updated following meeting on 19.09.25	22.09.25	AJA
P08	Updated following SCC Comments	08.09.25	AJA
P07	Updated following SCC Comments	29.07.25	AJA
P06	Updated following SCC Comments	18.06.25	RJD
P05	Updated following SCC Comments	30.04.25	RJD
P04	Substation access amended	30.10.24	AJA
P03	Substation access provided	18.10.24	AJA
P02	Updated to include resurfacing neighbouring drive	15.08.24	RJD
P01	Preliminary issue	03.06.24	GDM

AMA
ANDREW MOSELEY ASSOCIATES
15 St Paul's Street
Second Floor
Leeds
LS1 2JG
www.ama.co.uk

THE GREEN, CHEADLE

ALDI STORES LTD

**SECTION 111 WORKS
GENERAL ARRANGEMENT**

Drawn By: MSF Date: 18.04.2024
Checked: GDM Scale: 1:200 Status: For Approval Paper: A1
Drawing No: AMA-45030-S111-01 Rev: P09