
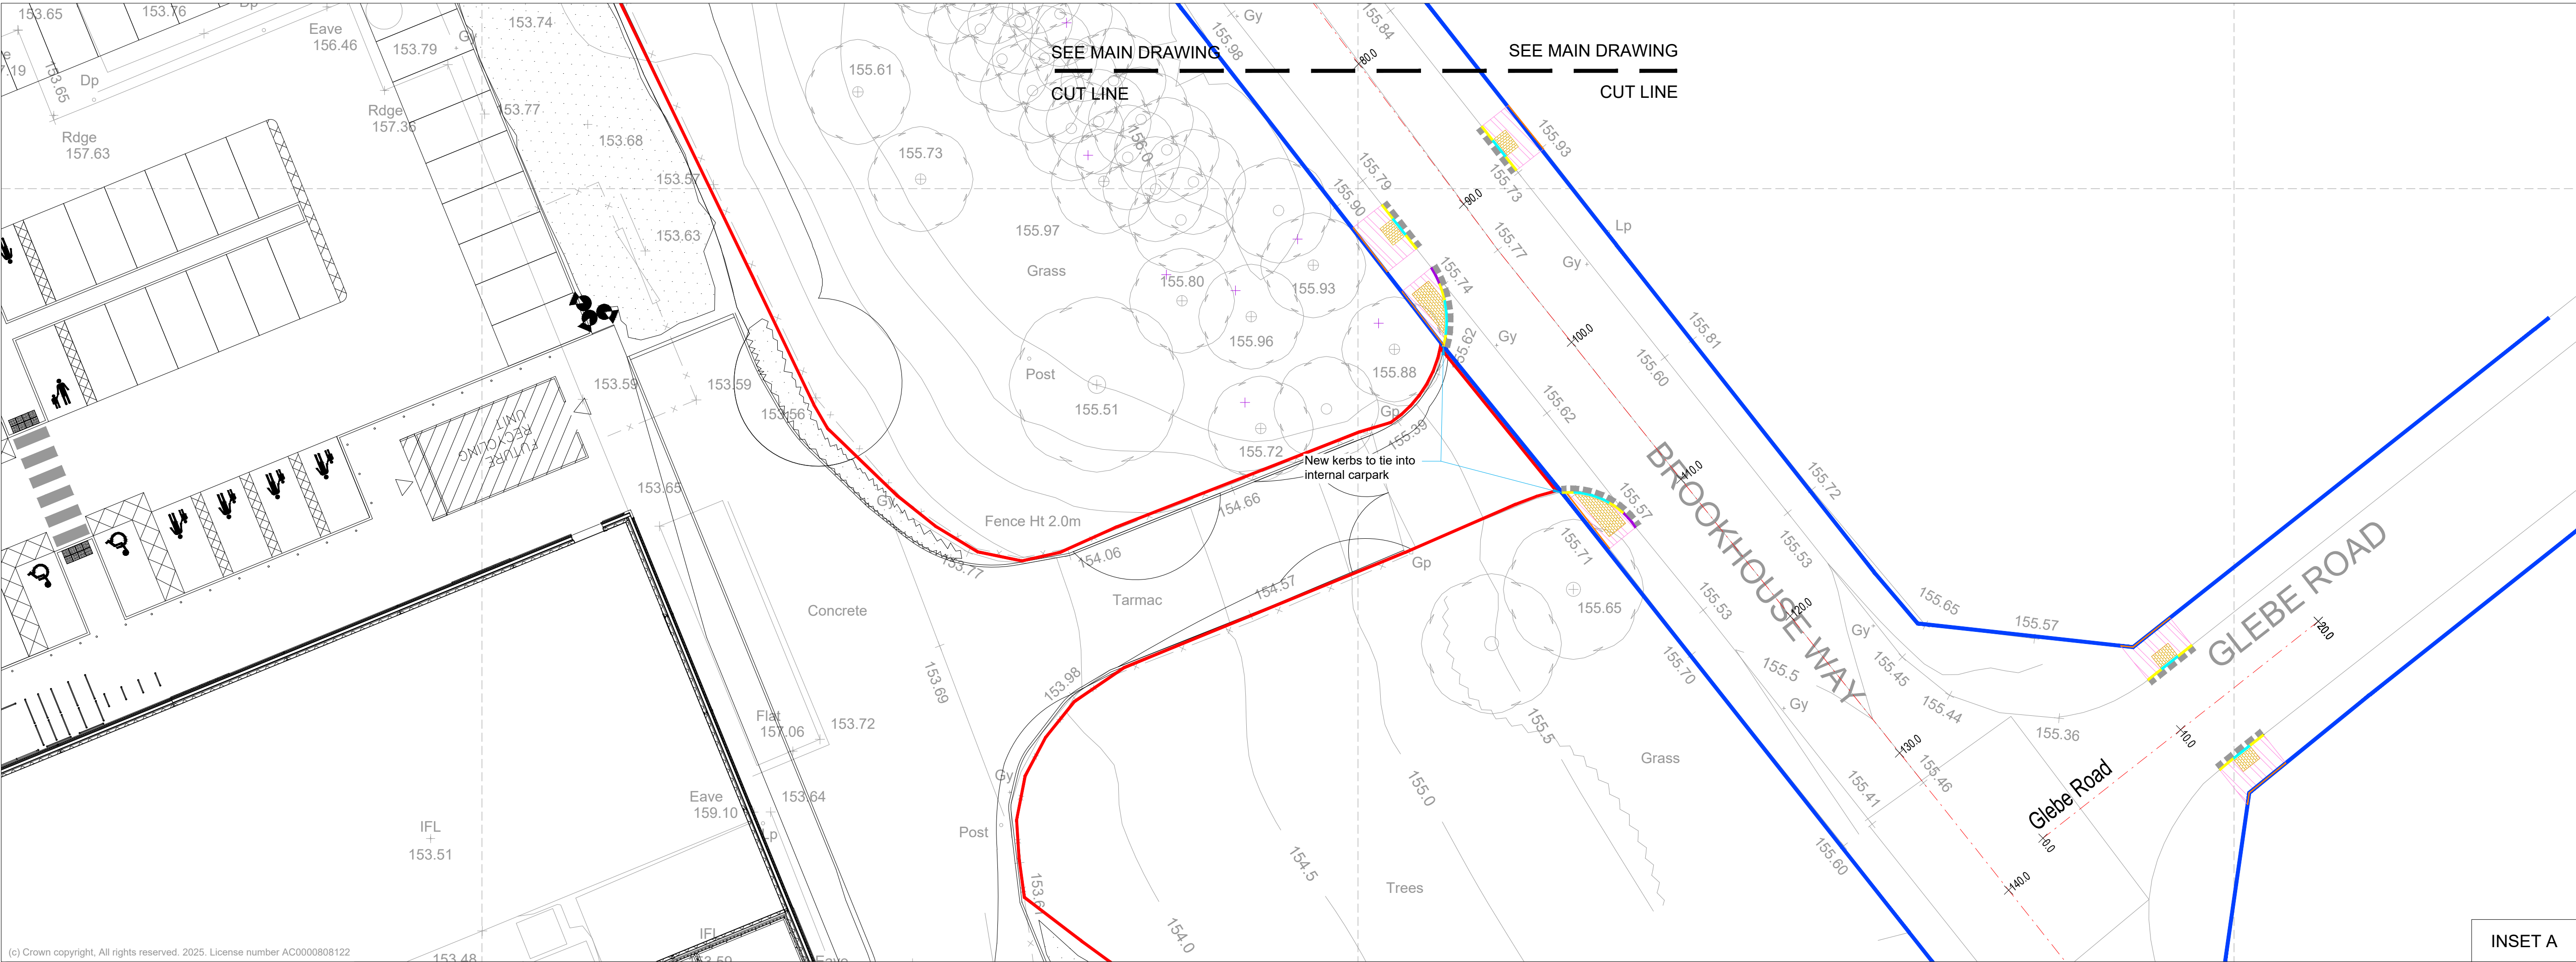
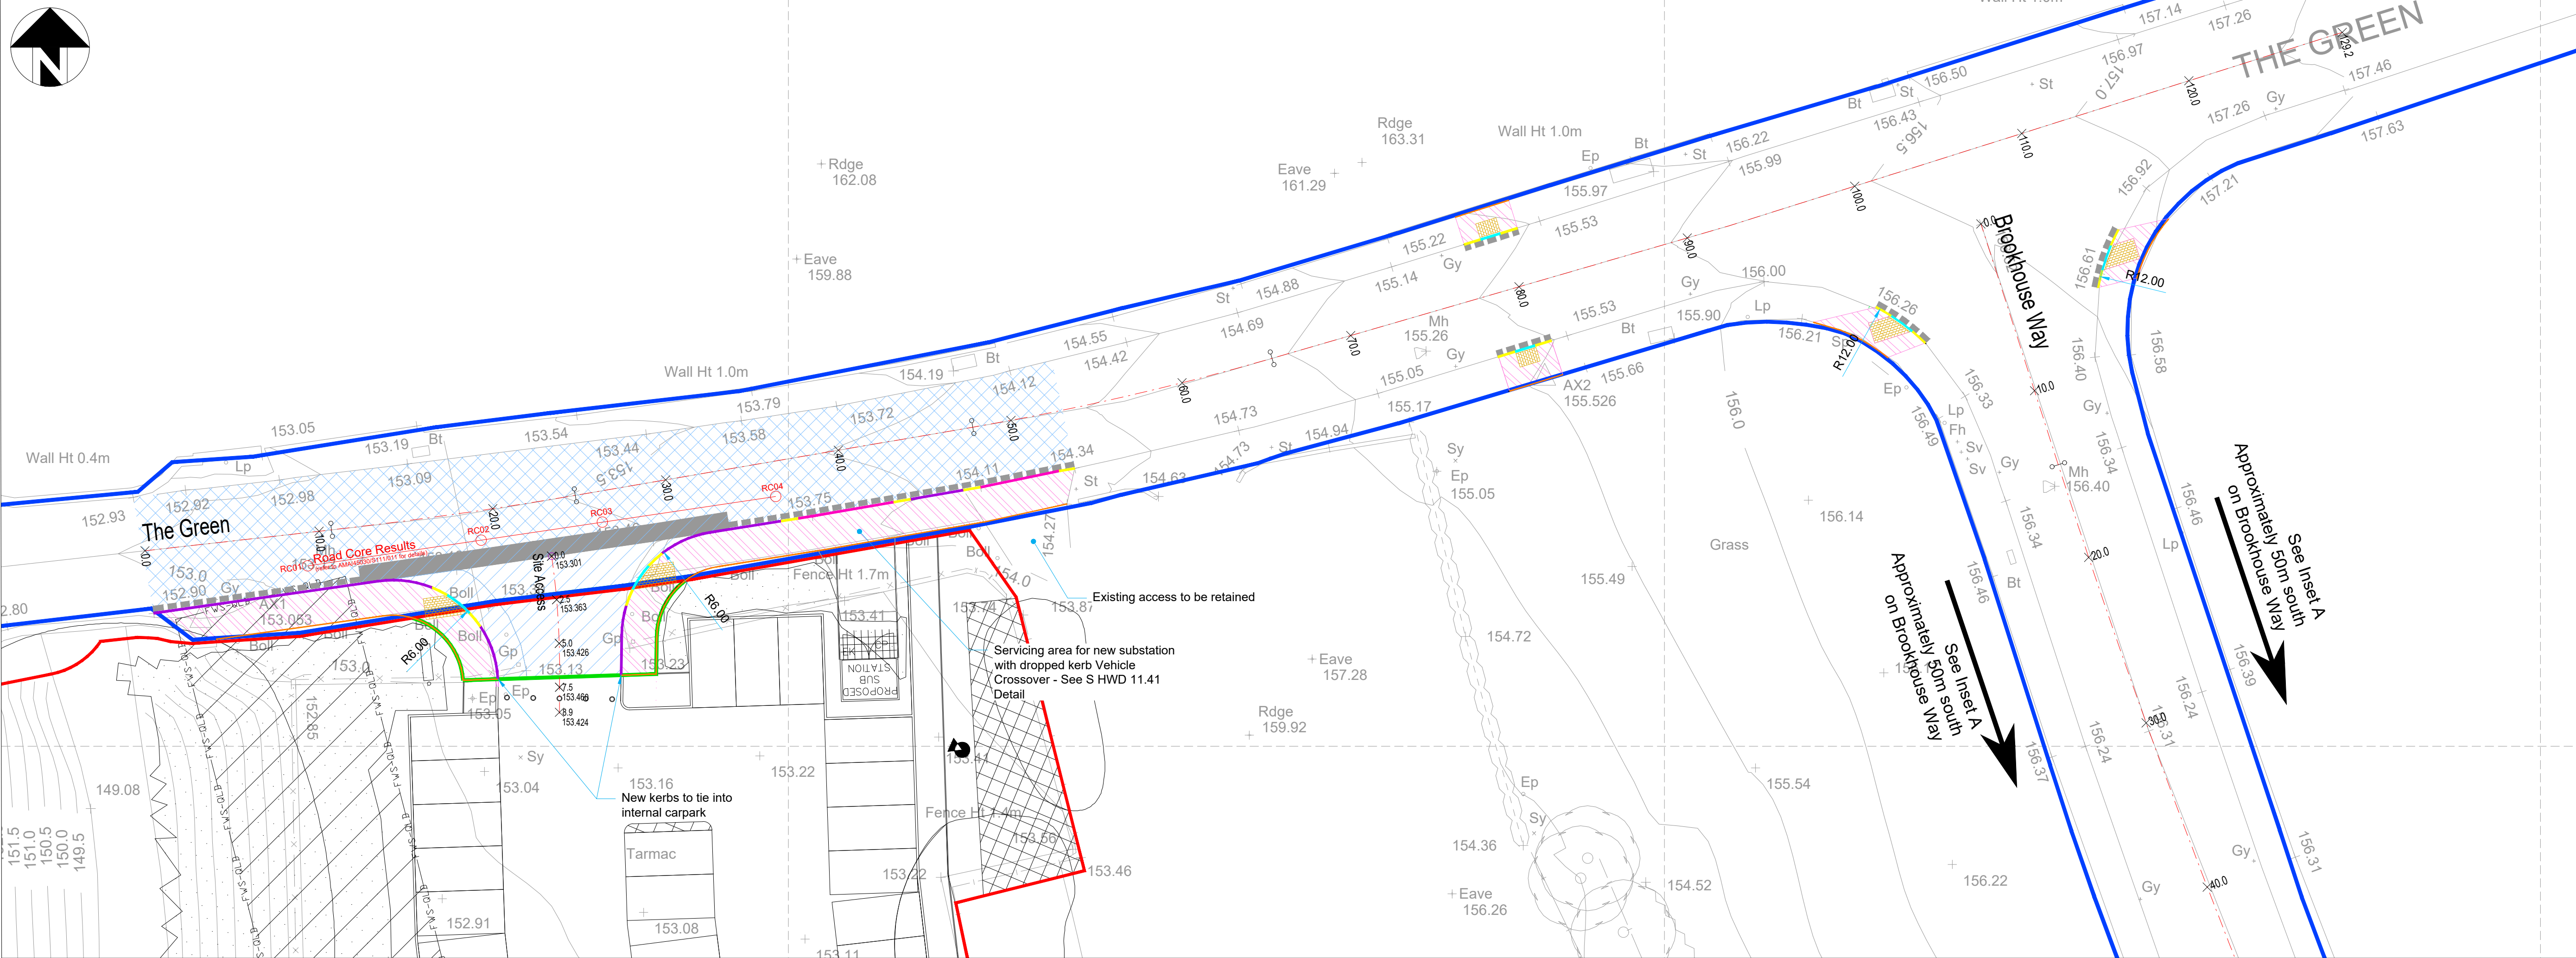




(c) Crown copyright. All rights reserved. 2025. License number AC0000808122

NOTES

General

1. All dimensions are in metres unless noted otherwise.

2. All dimensions & levels to be checked by the contractor prior to commencement of work, any discrepancy shall be reported immediately to the engineer.

3. Underground services are present in the area, contractor is to confirm the precise line and depth of any services prior to the commencement of any excavation works.

4. All work shall be carried out in accordance with local authority, statutory authority, health & safety requirements and regulations.

5. The drawings shall be read in accordance with all other contract documents relevant at that time of issue and during the period of the contract.

6. The contractor must ensure the overall stability of the works is adequate at all stages of the construction.

7. All chamber covers, valve boxes etc., situated within the works to be raised/lowered to match proposed levels where necessary.

8. All setting out shall be agreed on site with the overseeing organisation.

9. All works are to be in accordance with the Staffordshire County Council Highways Design Guide and the Specification for Highway Works.

10. If any discrepancies between technical drawings are found, the highway authority is to be notified.

11. All works are to comply with the latest revision of SCC's base specification and highway works detail unless otherwise agreed with the highway authority.

12. No works may take place within the highway until a permit to dig has been granted. One permit to dig is required for each named road.

13. This drawing is to be read in conjunction with all technically approved drawings.

KEY

14. The nature and extents of any pavement tie in works shown are indicative only with the details to be confirmed when the existing pavement composition is confirmed (see 65) Full Carriageway Construction refer to AMA-45030-S111-11 for details

Pavement type 2 (minimum PSV 65) Partial Carriageway reconstruction refer to AMA-45030-S111-11 for details and SCC HWD Appendix 7/9

Pavement Tie-In per Regulating courses for Tie-Ins on Existing carriageway per SCC Detail Drg 07.09

Footway type 2 Construction within SCC Base Spec, minimum PSV 45 - Existing Type 2 Footway to be resurfaced to minimise Cut Lines

Footway type 4 Precast Concrete Blister Tactile Blocks per SCC Detail Drg 11.37 in Type 4 footway per SCC Base Spec

125 x 255mm 'HB2' Half Battered Kerbs with 125mm upstand Type 'K1' to SCC Detail Drg 11.01 C1

125 x 150mm 'BN' Bullnosed Kerbs with 0-6mm upstand Type K3 to SCC Detail Drg 11.01 C1 with transition kerbs either side

125 x 150mm 'BN' Bullnosed Kerbs with 25mm upstand Type K3 to SCC Detail Drg 11.01 C1

Dropped Transition kerbs type HB2 to BN. Additional HB2 Kerbs to be cut to size to ensure a proper tie-in. Type T3 & T4 to SCC Detail Drg 11.01 C1. Cut kerbs to retain at least 50% of original length.

50 x 150mm 'EP' Precast Concrete Flat Top Edging Laid Flush Type E2 to SCC Detail Drg 11.11 C1

Carriageway reinstatement at new kerbs as per Appendix 11/1 of SCC Base Spec and HWD 07.09

Site boundary

Existing Highway boundary

Proposed Highway boundary

P08	Updated following meeting on 19.09.25	22.09.25	AJA
P07	Updated following SCC Comments	18.09.25	AJA
P06	Updated following SCC Comments	18.09.25	RHD
P05	Updated following SCC Comments	30.04.25	RHD
P04	Substation access amended	31.10.24	AJA
P03	Substation access provided	18.10.24	AJA
P02	Updated to include neighbouring drive	15.08.24	RHD
P01	Preliminary issue	01.05.24	GDM



Project: THE GREEN, CHEADLE

Client: ALDI STORES LTD

Drawing: SECTION 111 WORKS KERBS, FOOTWAYS & PAVED AREAS

Drawn By: MSF Date: 18.04.2024

Checked: GDM Scale: 1:200 Status: For Approval Paper: A1

Drawing No: AMA-45030-S111-03 Rev: P08