



5-1. Sound levels in cooling mode

PUHY-P-Y(S)NW-A

Measurement condition
PUHY-P200, 250, 300YNW-A(-BS)

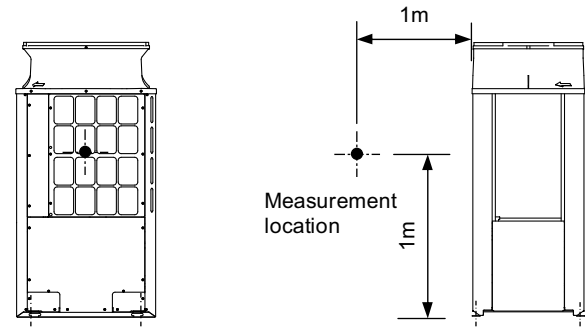


Sound level of PUHY-P300YNW-A(-BS)

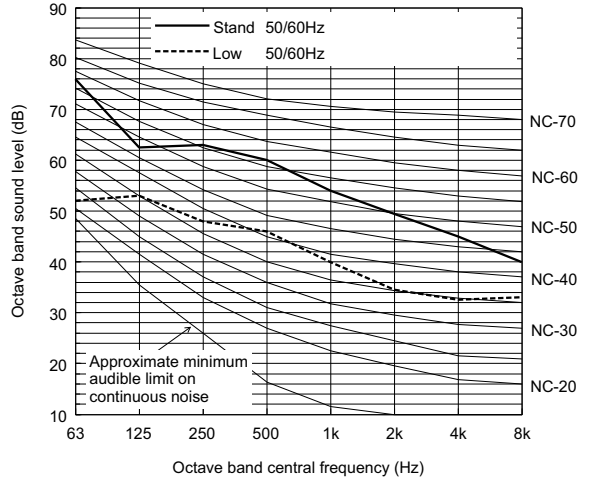

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	76.0	62.5	63.0	60.0	54.0	49.5	45.0	40.0	61.0
Low noise mode	50/60Hz	52.0	53.0	48.0	46.0	40.0	34.5	32.5	33.0	47.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-P200YNW-A(-BS)

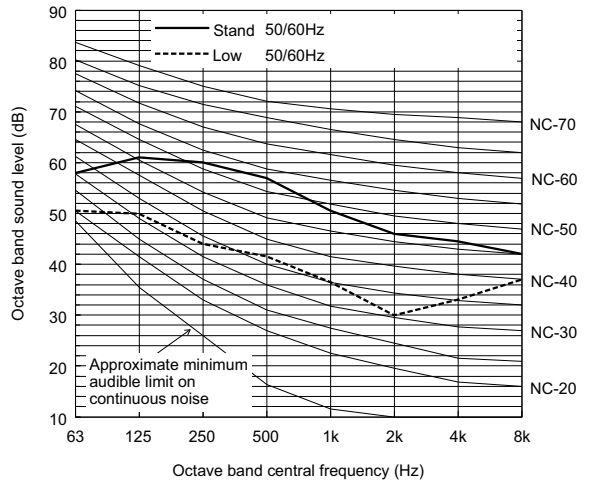

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	58.0	61.0	60.0	57.0	50.5	46.0	44.5	42.0	58.0
Low noise mode	50/60Hz	50.5	50.0	44.0	41.5	36.5	30.0	33.0	37.0	44.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-P250YNW-A(-BS)

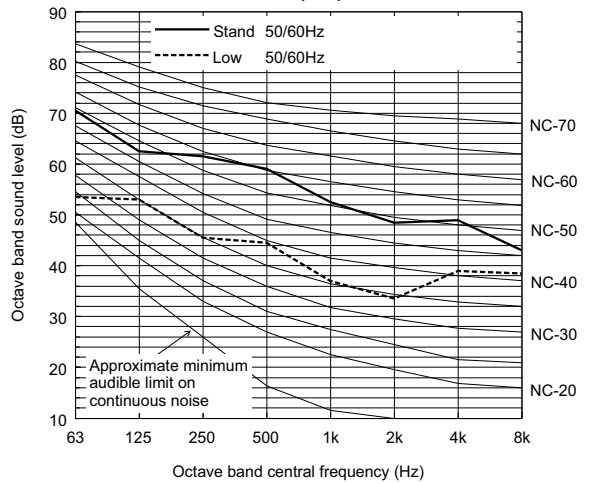


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	70.5	62.5	61.5	59.0	52.5	48.5	49.0	43.0	60.0
Low noise mode	50/60Hz	53.5	53.0	45.5	44.5	37.0	33.5	39.0	38.5	46.5


When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

• Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.

Measurement condition PUHY-P350, 400, 450YNW-A(-BS)

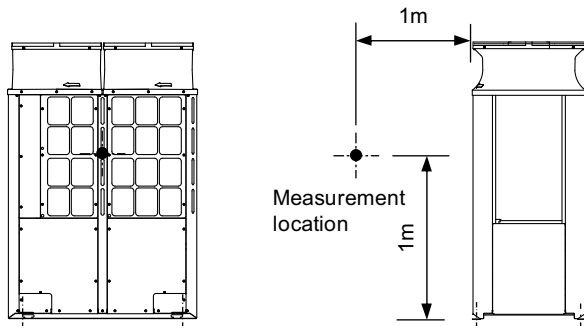


Sound level of PUHY-P450YNW-A(-BS)

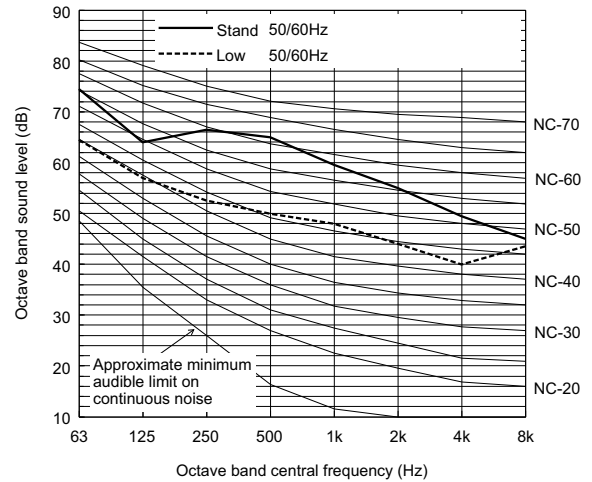

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	74.5	64.0	66.5	65.0	59.5	55.0	49.5	45.0	65.5
Low noise mode	50/60Hz	64.5	57.0	52.5	50.0	48.0	44.0	40.0	43.5	53.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-P350YNW-A(-BS)

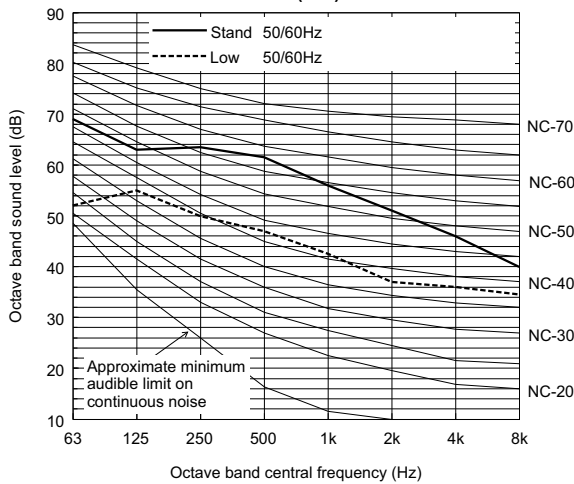

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	69.0	63.0	63.5	61.5	56.0	51.0	46.0	40.0	62.0
Low noise mode	50/60Hz	52.0	55.0	50.0	47.0	42.5	37.0	36.0	34.5	49.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-P400YNW-A(-BS)

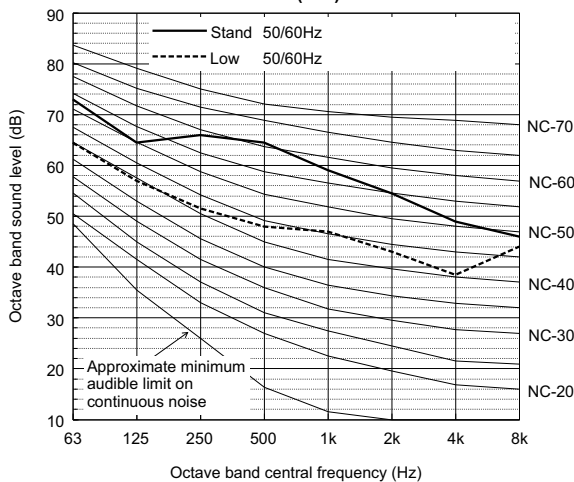


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	73.0	64.5	66.0	64.5	59.0	54.5	49.0	46.0	65.0
Low noise mode	50/60Hz	64.5	57.0	51.5	48.0	47.0	43.0	38.5	44.0	52.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


- Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.

PUHY-P-Y(S)NW-A

Measurement condition
PUHY-P500YNW-A(-BS)

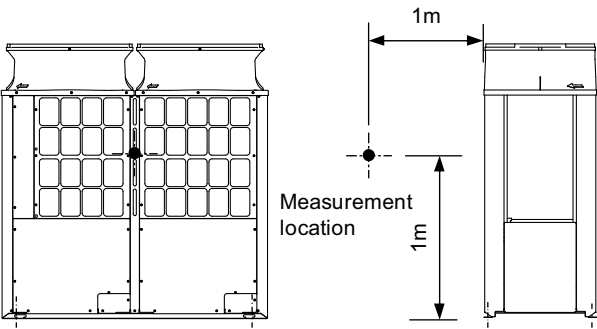


Sound level of PUHY-P500YNW-A(-BS)

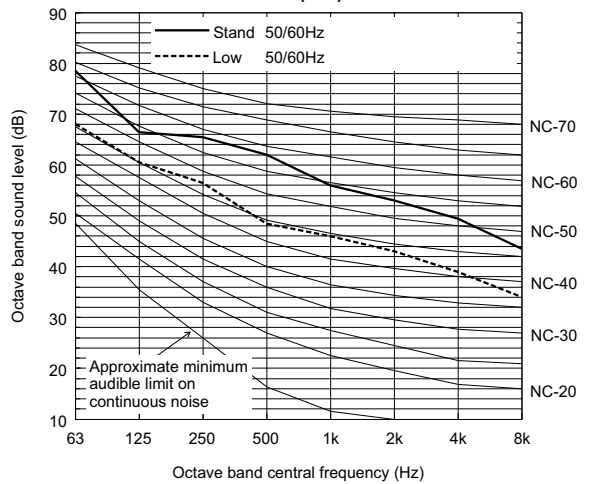


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	78.5	66.5	65.5	62.0	56.0	53.0	49.5	43.5	63.5
Low noise mode	50/60Hz	68.0	60.5	56.5	48.5	46.0	43.0	39.0	34.0	53.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Measurement condition
PUHY-P400, 450, 500, 550, 600YSNW-A(-BS)

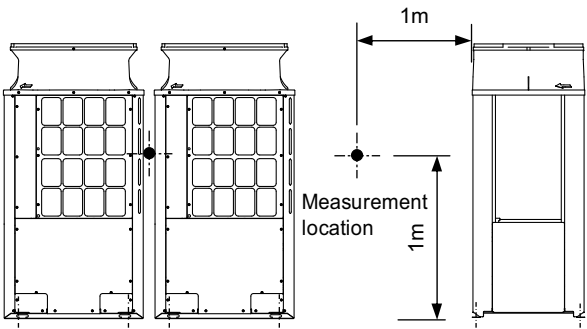


Sound level of PUHY-P400YSNW-A(-BS)

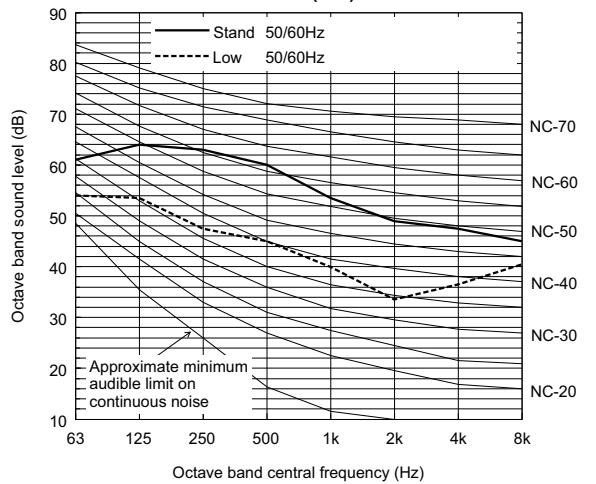

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	61.0	64.0	63.0	60.0	53.5	49.0	47.5	45.0	61.0
Low noise mode	50/60Hz	54.0	53.5	47.5	45.0	40.0	33.5	36.5	40.5	47.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-P450YSNW-A(-BS)

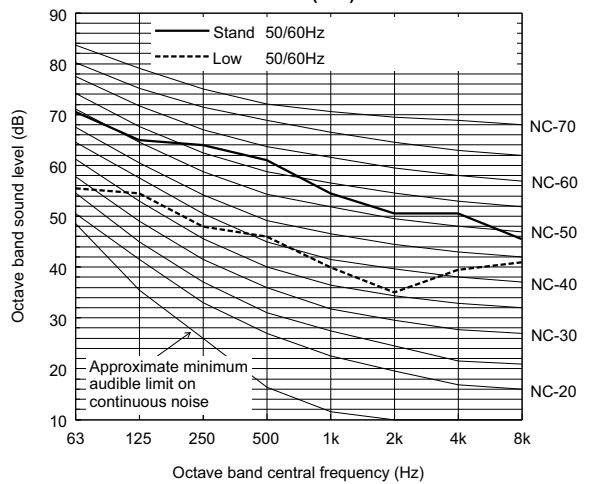


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	70.5	65.0	64.0	61.0	54.5	50.5	50.5	45.5	62.0
Low noise mode	50/60Hz	55.5	54.5	48.0	46.0	40.0	35.0	39.5	41.0	48.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

• Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.


Sound level of PUHY-P500YSNW-A(-BS)

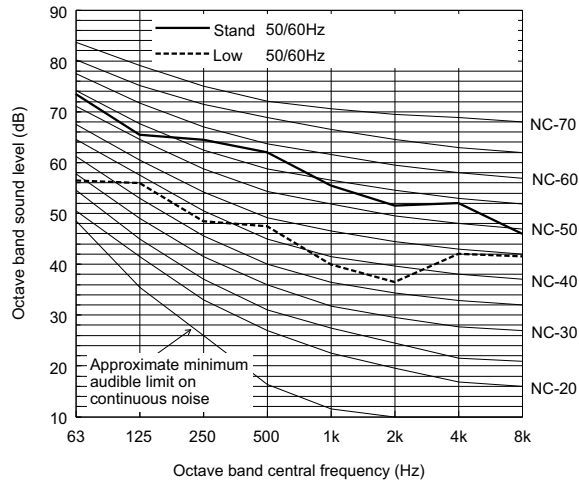


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	73.5	65.5	64.5	62.0	55.5	51.5	52.0	46.0	63.0
Low noise mode	50/60Hz	56.5	56.0	48.5	47.5	40.0	36.5	42.0	41.5	49.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

**Measurement condition
PUHY-P650YSNW-A(-BS)**

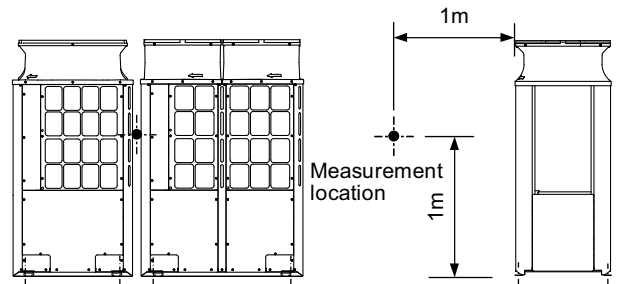


Sound level of PUHY-P550YSNW-A(-BS)

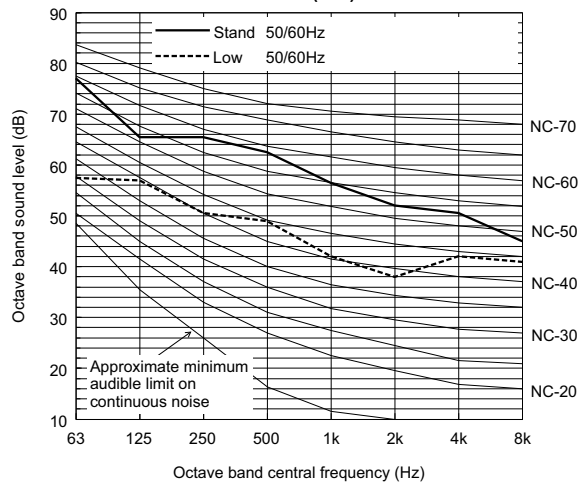

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	77.0	65.5	65.5	62.5	56.5	52.0	50.5	45.0	63.5
Low noise mode	50/60Hz	57.5	57.0	50.5	49.0	42.0	38.0	42.0	41.0	51.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-P650YSNW-A(-BS)

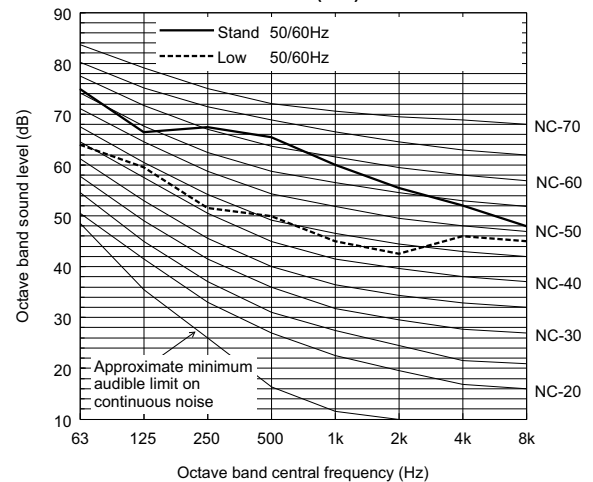

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	75.0	66.5	67.5	65.5	60.0	55.5	52.0	48.0	66.5
Low noise mode	50/60Hz	64.0	59.5	51.5	50.0	45.0	42.5	46.0	45.0	53.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.



Sound level of PUHY-P600YSNW-A(-BS)

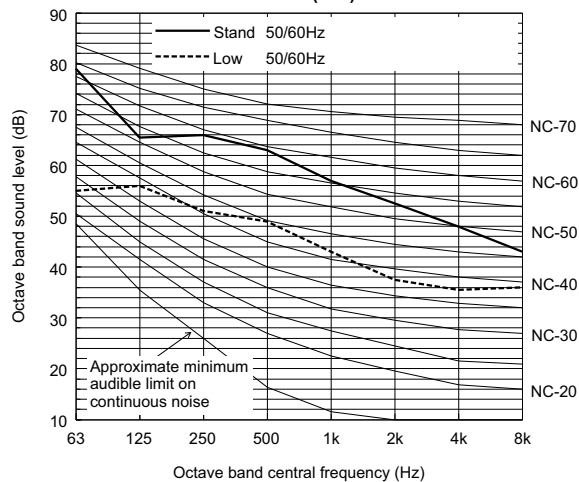

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	79.0	65.5	66.0	63.0	57.0	52.5	48.0	43.0	64.0
Low noise mode	50/60Hz	55.0	56.0	51.0	49.0	43.0	37.5	35.5	36.0	50.0


When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

• Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.

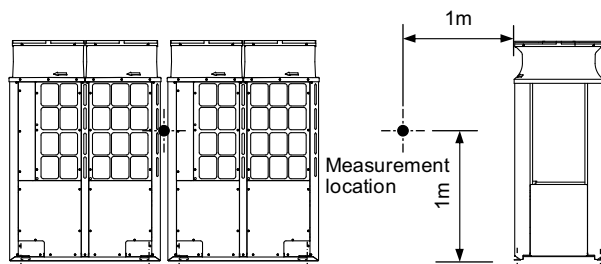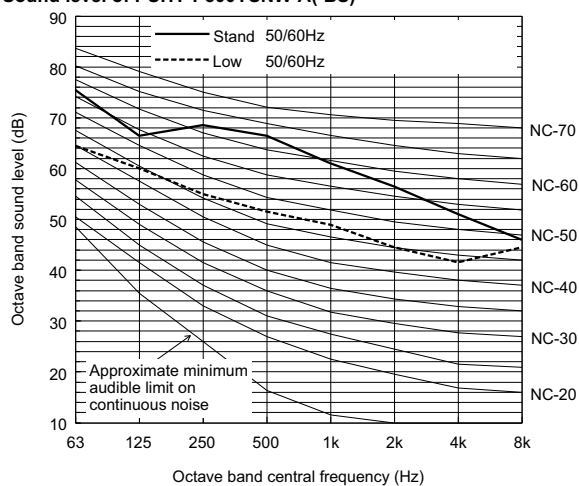Measurement condition
PUHY-P700, 750, 800, 850, 900YSNW-A(-BS)

Sound level of PUHY-P800YSNW-A(-BS)


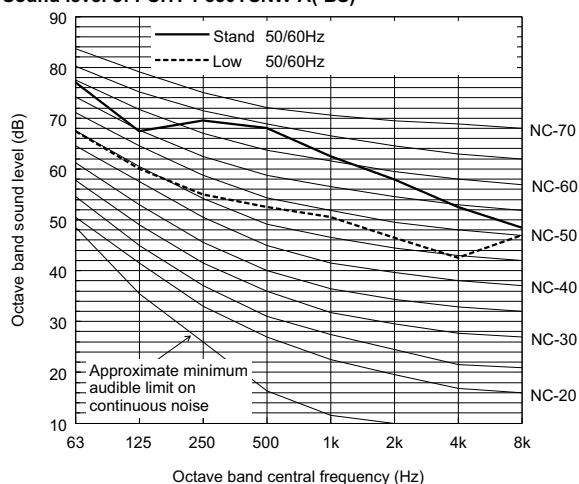
		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	75.5	66.5	68.5	66.5	61.0	56.5	51.0	46.0	67.5
Low noise mode	50/60Hz	64.5	60.0	55.0	51.5	49.0	44.5	41.5	44.5	55.0

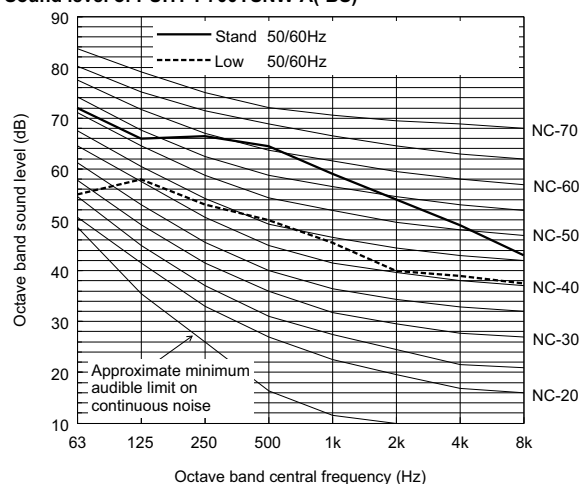When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-P700YSNW-A(-BS)


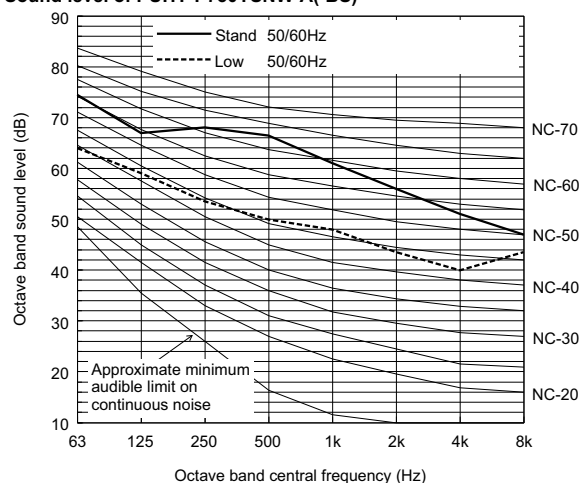
		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	72.0	66.0	66.5	64.5	59.0	54.0	49.0	43.0	65.0
Low noise mode	50/60Hz	55.0	58.0	53.0	50.0	45.5	40.0	39.0	37.5	52.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-P850YSNW-A(-BS)


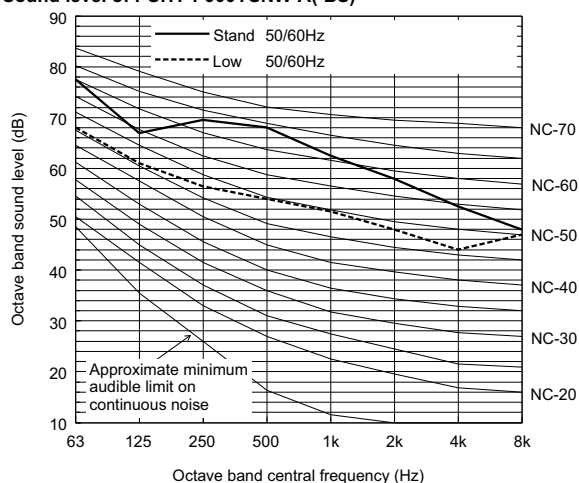
		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	77.0	67.5	69.5	68.0	62.5	58.0	52.5	48.5	68.5
Low noise mode	50/60Hz	67.5	60.0	55.0	52.5	50.5	46.5	42.5	47.0	56.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-P750YSNW-A(-BS)


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	74.5	67.0	68.0	66.5	61.0	56.0	51.0	47.0	67.0
Low noise mode	50/60Hz	64.0	59.0	53.5	50.0	48.0	43.5	40.0	43.5	53.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-P900YSNW-A(-BS)


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	77.5	67.0	69.5	68.0	62.5	58.0	52.5	48.0	68.5
Low noise mode	50/60Hz	68.0	61.0	56.5	54.0	51.5	48.0	44.0	47.0	57.0


When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

♦ Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.

Measurement condition PUHY-P950, 1000, 1050YSNW-A(-BS)

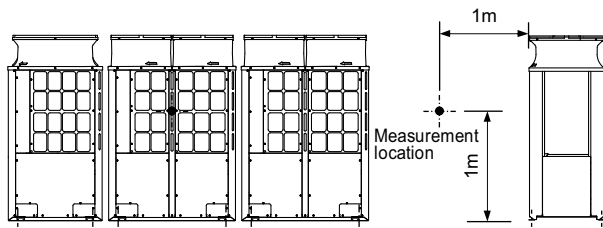


Sound level of PUHY-P1050YSNW-A(-BS)

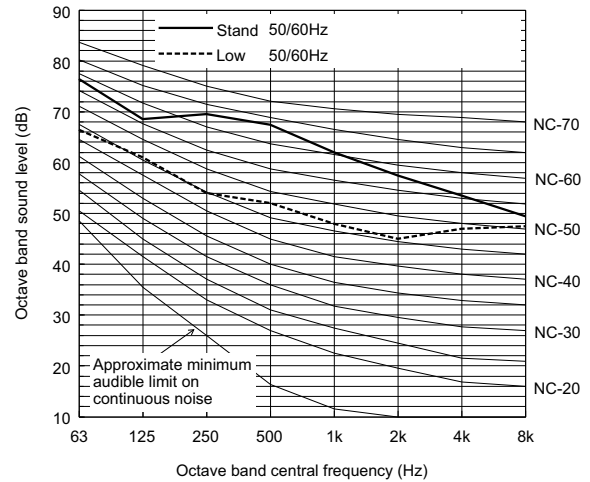

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	76.5	68.5	69.5	67.5	62.0	57.5	53.5	49.5	68.5
Low noise mode	50/60Hz	66.5	61.0	54.0	52.0	48.0	45.0	47.0	47.5	55.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-P950YSNW-A(-BS)

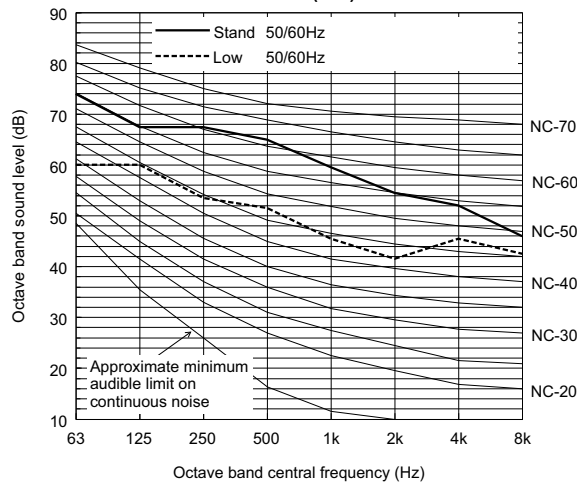

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	74.0	67.5	67.5	65.0	59.5	54.5	52.0	46.0	66.0
Low noise mode	50/60Hz	60.0	60.0	53.5	51.5	45.5	41.5	45.5	42.5	54.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-P1000YSNW-A(-BS)

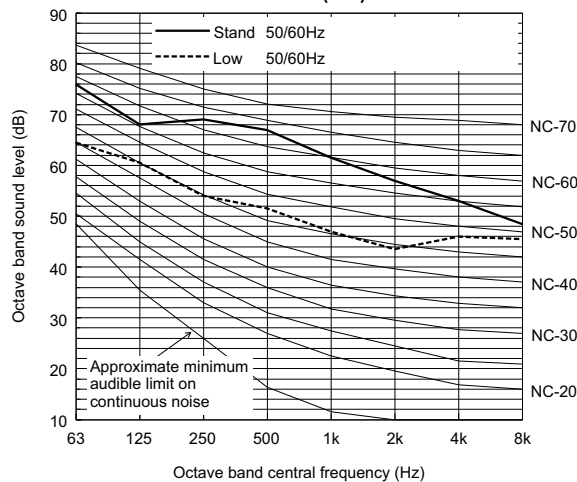


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	76.0	68.0	69.0	67.0	61.5	57.0	53.0	48.5	68.0
Low noise mode	50/60Hz	64.5	60.5	54.0	51.5	47.0	43.5	46.0	45.5	54.5


When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

- Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.

Measurement condition PUHY-P1100, 1150, 1200, 1250, 1300, 1350YSNW-A(-BS)

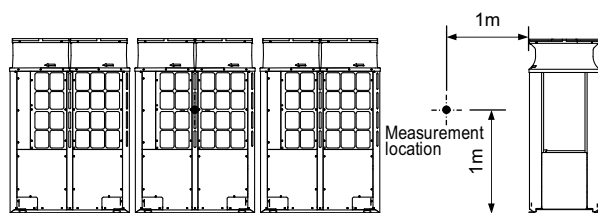


Sound level of PUHY-P1200YSNW-A(-BS)

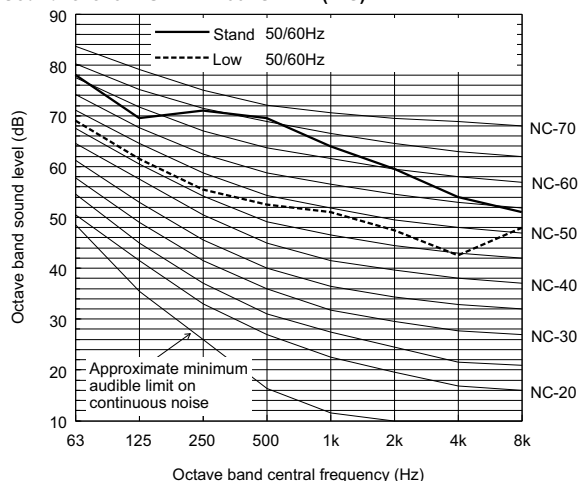

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	78.0	69.5	71.0	69.5	64.0	59.5	54.0	51.0	70.0
Low noise mode	50/60Hz	69.0	61.5	55.5	52.5	51.0	47.5	42.5	48.0	56.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-P1100YSNW-A(-BS)

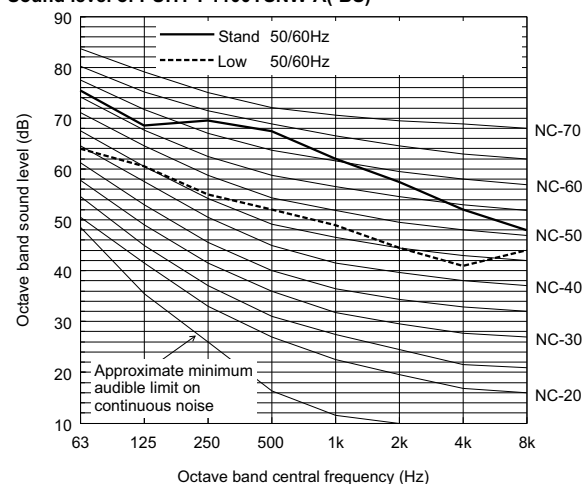

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	75.5	68.5	69.5	67.5	62.0	57.5	52.0	48.0	68.5
Low noise mode	50/60Hz	64.0	60.5	55.0	52.0	49.0	44.5	41.0	44.0	55.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-P1250YSNW-A(-BS)

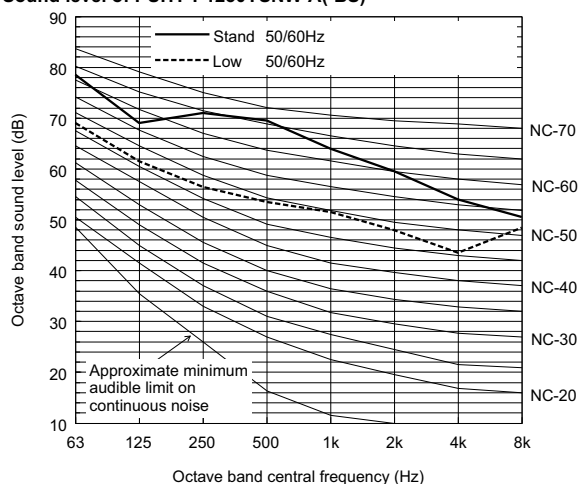

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	78.5	69.0	71.0	69.5	64.0	59.5	54.0	50.5	70.0
Low noise mode	50/60Hz	69.0	61.5	56.5	53.5	51.5	48.0	43.5	48.5	57.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-P1150YSNW-A(-BS)

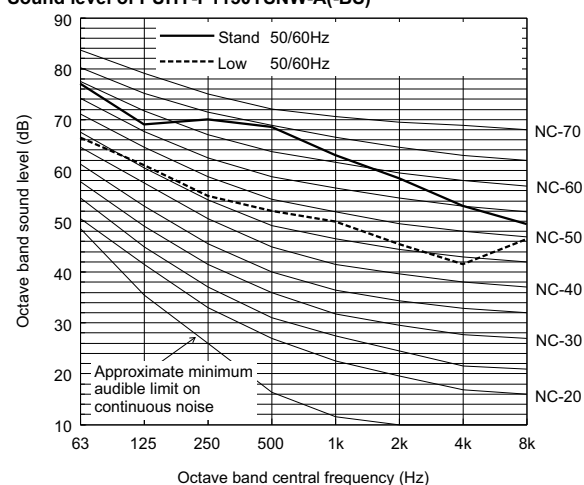

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	77.0	69.0	70.0	68.5	63.0	58.5	53.0	49.5	69.0
Low noise mode	50/60Hz	66.5	61.0	55.0	52.0	50.0	45.5	41.5	46.5	55.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-P1300YSNW-A(-BS)

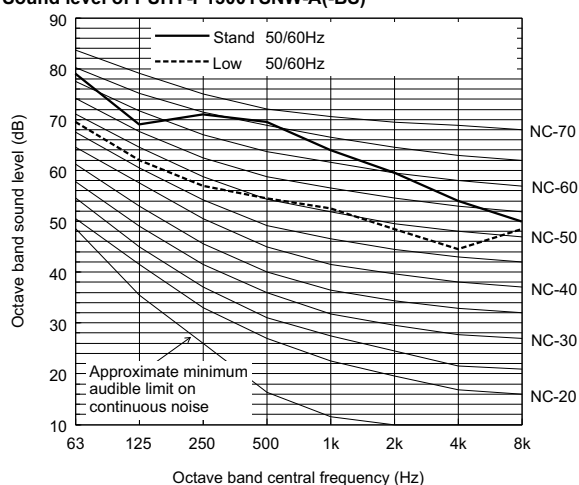

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	79.0	69.0	71.0	69.5	64.0	59.5	54.0	50.0	70.0
Low noise mode	50/60Hz	69.5	62.0	57.0	54.5	52.5	48.5	44.5	48.5	58.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

• Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.

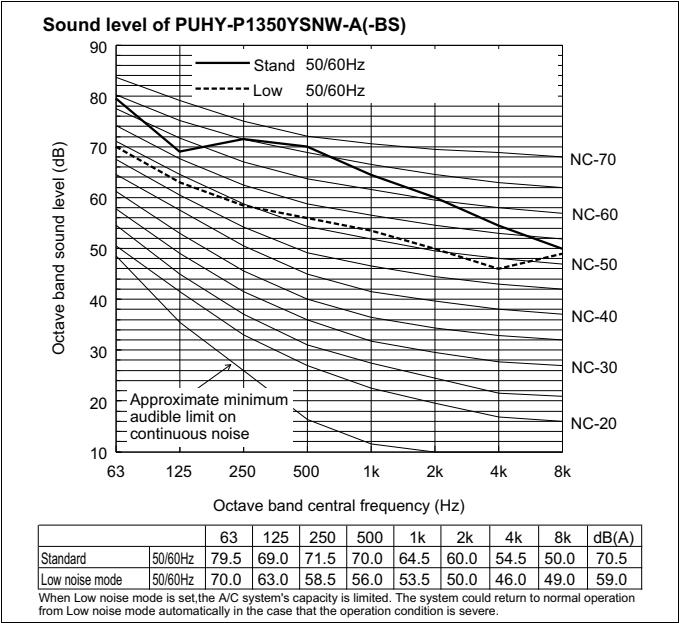


♦ Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.


5-2. Sound levels in heating mode

PUHY-P-Y(S)NW-A

Measurement condition
PUHY-P200, 250, 300YNW-A(-BS)

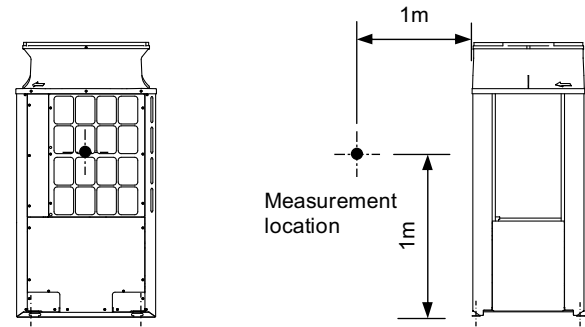


Sound level of PUHY-P300YNW-A(-BS)

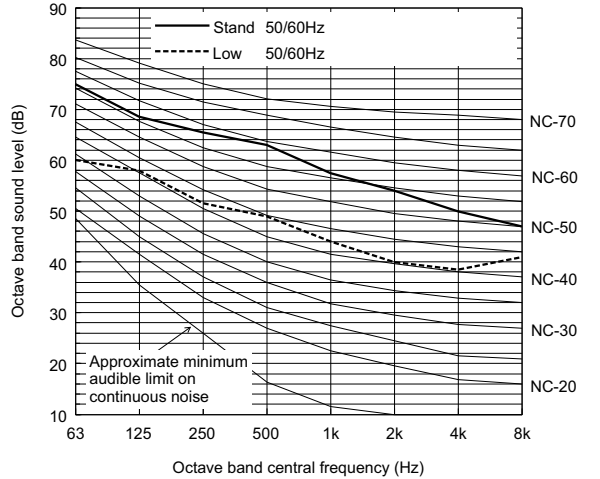

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	75.0	68.5	65.5	63.0	57.5	54.0	50.0	47.0	64.5
Low noise mode	50/60Hz	60.0	58.0	51.5	49.0	44.0	40.0	38.5	41.0	51.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-P200YNW-A(-BS)

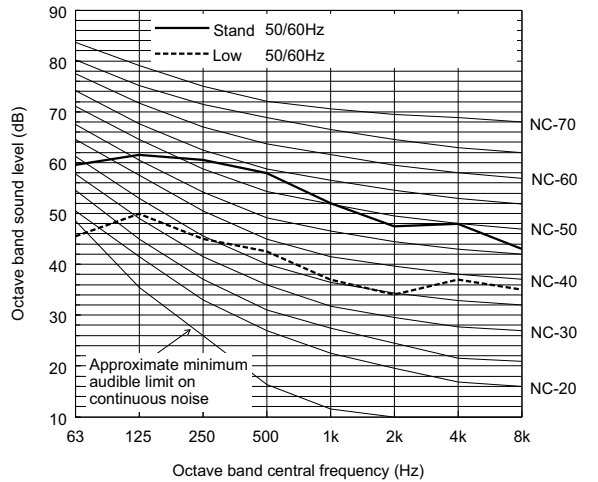

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	59.5	61.5	60.5	58.0	52.0	47.5	48.0	43.0	59.0
Low noise mode	50/60Hz	45.5	50.0	45.0	42.5	37.0	34.0	37.0	35.0	45.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-P250YNW-A(-BS)

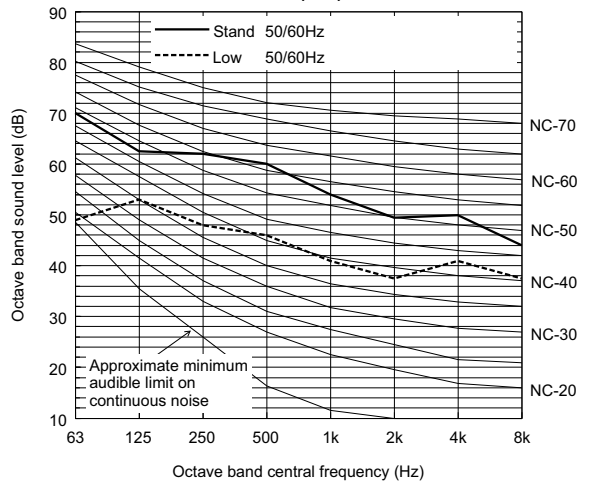


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	70.0	62.5	62.0	60.0	54.0	49.5	50.0	44.0	61.0
Low noise mode	50/60Hz	49.0	53.0	48.0	46.0	41.0	37.5	41.0	37.5	48.5


When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

• Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.

Measurement condition PUHY-P350, 400, 450YNW-A(-BS)

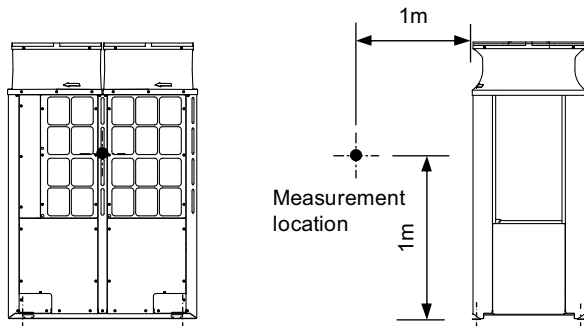


Sound level of PUHY-P450YNW-A(-BS)

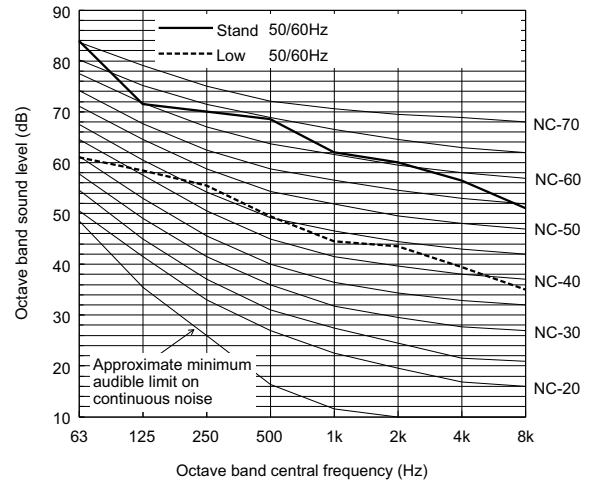

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	84.0	71.5	70.0	68.5	62.0	60.0	56.5	51.0	69.5
Low noise mode	50/60Hz	61.0	58.5	55.5	49.5	44.5	43.5	39.5	35.0	52.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-P350YNW-A(-BS)

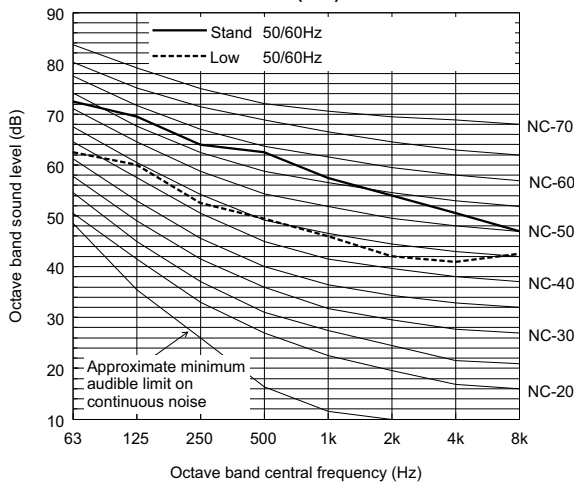

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	72.5	69.5	64.0	62.5	57.5	54.0	50.5	47.0	64.0
Low noise mode	50/60Hz	62.5	60.0	52.5	49.5	46.0	42.0	41.0	42.5	52.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-P400YNW-A(-BS)

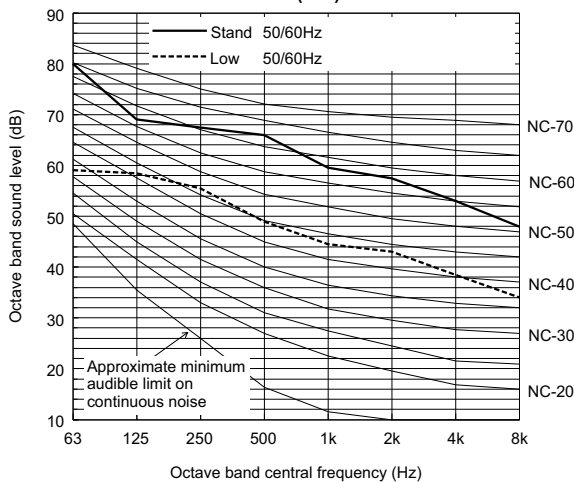


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	80.0	69.0	67.5	66.0	59.5	57.5	53.0	48.0	67.0
Low noise mode	50/60Hz	59.0	58.5	55.5	49.0	44.5	43.0	38.5	34.0	52.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


- Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.

PUHY-P-Y(S)NW-A

Measurement condition
PUHY-P500YNW-A(-BS)

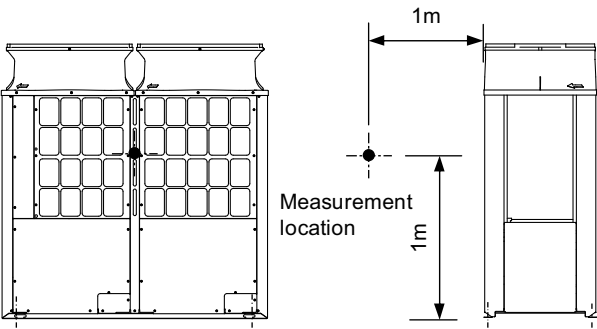


Sound level of PUHY-P500YNW-A(-BS)

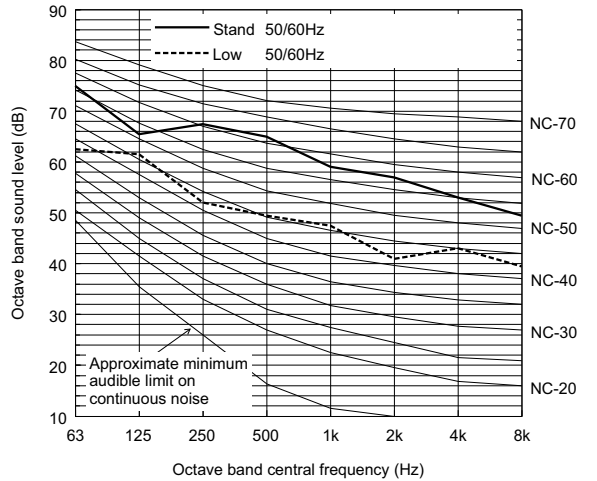


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	75.0	65.5	67.5	65.0	59.0	57.0	53.0	49.5	66.5
Low noise mode	50/60Hz	62.5	61.5	52.0	49.5	47.5	41.0	43.0	39.5	53.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Measurement condition
PUHY-P400, 450, 500, 550, 600YSNW-A(-BS)

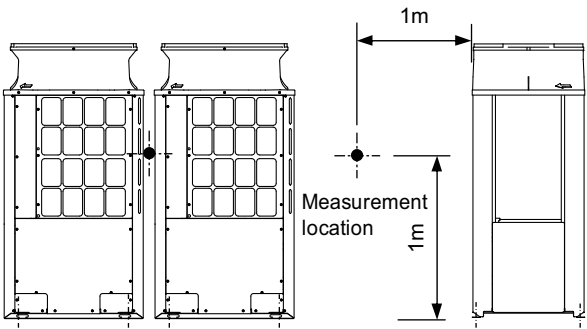


Sound level of PUHY-P400YSNW-A(-BS)

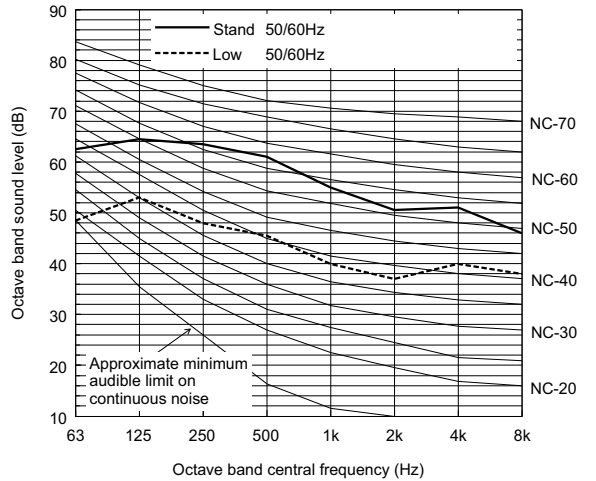

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	62.5	64.5	63.5	61.0	55.0	50.5	51.0	46.0	62.0
Low noise mode	50/60Hz	48.5	53.0	48.0	45.5	40.0	37.0	40.0	38.0	48.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-P450YSNW-A(-BS)

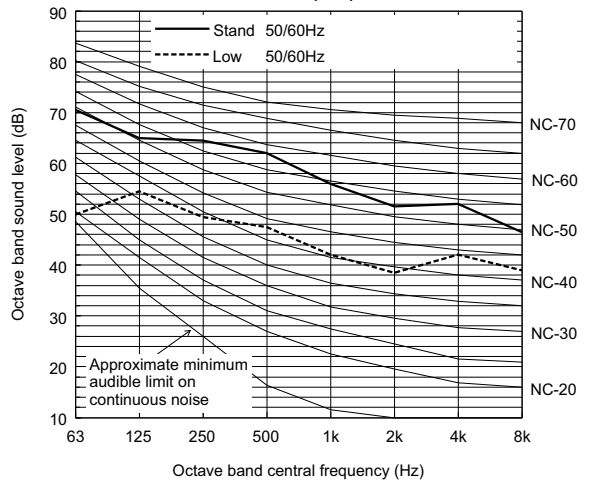


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	70.5	65.0	64.5	62.0	56.0	51.5	52.0	46.5	63.0
Low noise mode	50/60Hz	50.0	54.5	49.5	47.5	42.0	38.5	42.0	39.0	50.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

• Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.


Sound level of PUHY-P500YSNW-A(-BS)

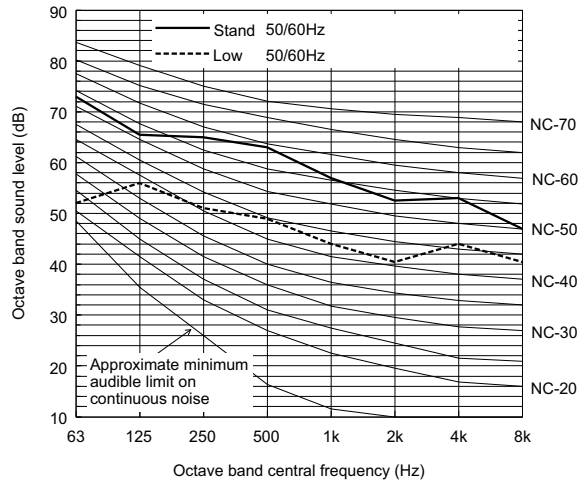


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	73.0	65.5	65.0	63.0	57.0	52.5	53.0	47.0	64.0
Low noise mode	50/60Hz	52.0	56.0	51.0	49.0	44.0	40.5	44.0	40.5	51.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Measurement condition
PUHY-P650YSNW-A(-BS)

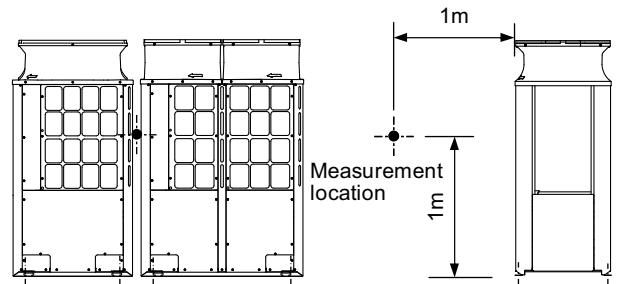


Sound level of PUHY-P550YSNW-A(-BS)

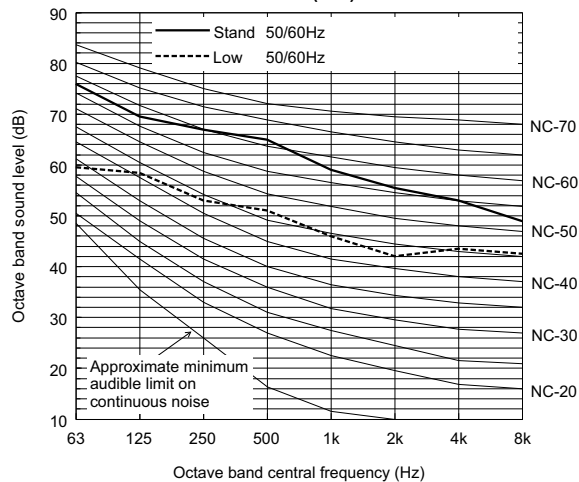

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	76.0	69.5	67.0	65.0	59.0	55.5	53.0	49.0	66.0
Low noise mode	50/60Hz	59.5	58.5	53.0	51.0	46.0	42.0	43.5	42.5	53.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-P650YSNW-A(-BS)

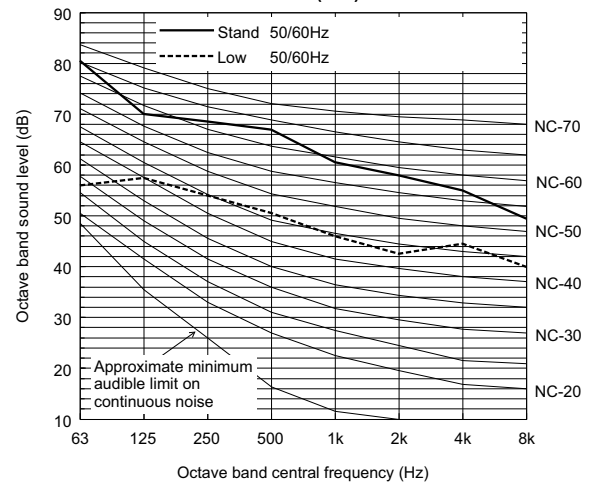

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	80.5	70.0	68.5	67.0	60.5	58.0	55.0	49.5	68.0
Low noise mode	50/60Hz	56.0	57.5	54.0	50.5	46.0	42.5	44.5	40.0	53.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.



Sound level of PUHY-P600YSNW-A(-BS)

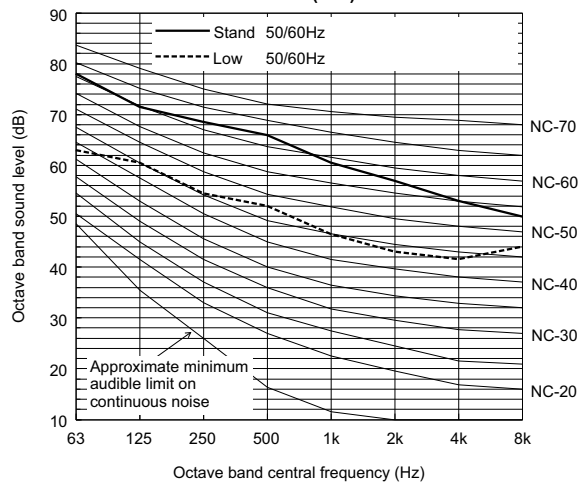

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	78.0	71.5	68.5	66.0	60.5	57.0	53.0	50.0	67.5
Low noise mode	50/60Hz	63.0	60.5	54.5	52.0	46.5	43.0	41.5	44.0	54.0


When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

• Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.

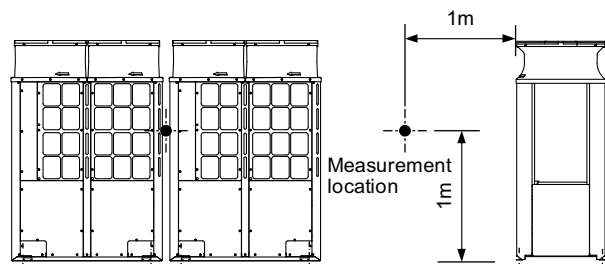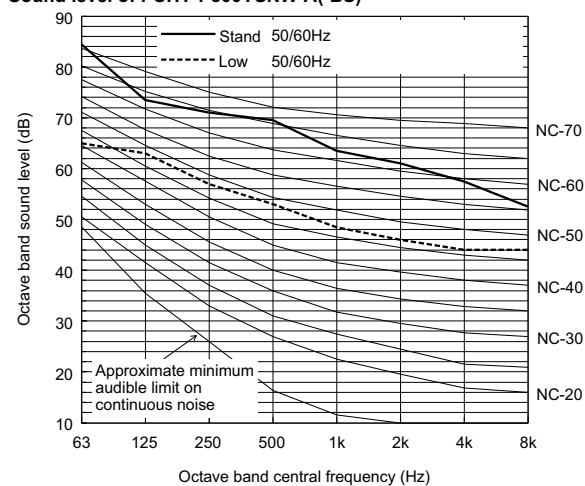Measurement condition
PUHY-P700, 750, 800, 850, 900YSNW-A(-BS)

Sound level of PUHY-P800YSNW-A(-BS)


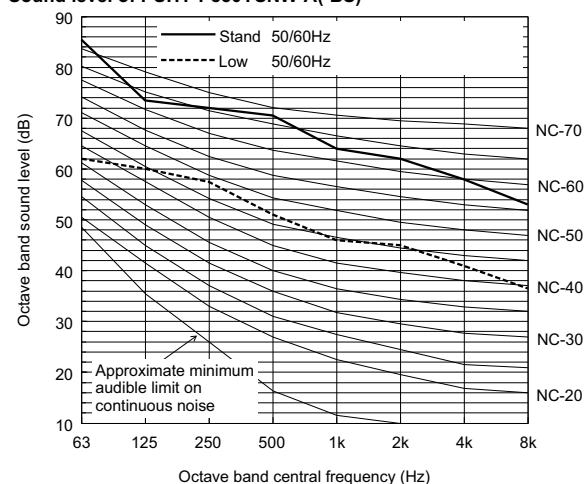
		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	84.5	73.5	71.0	69.5	63.5	61.0	57.5	52.5	71.0
Low noise mode	50/60Hz	65.0	63.0	57.0	53.0	48.5	46.0	44.0	44.0	56.0

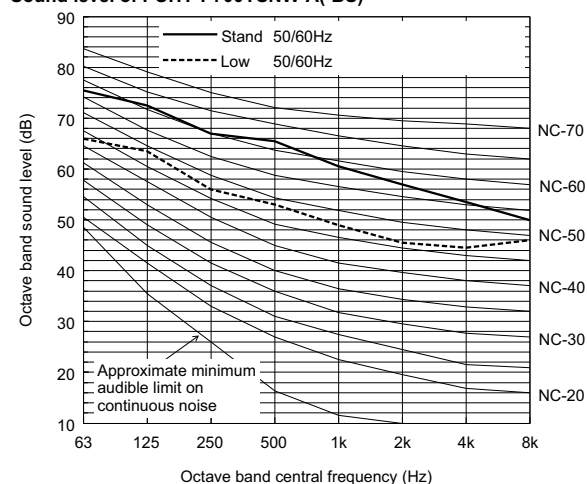When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-P700YSNW-A(-BS)


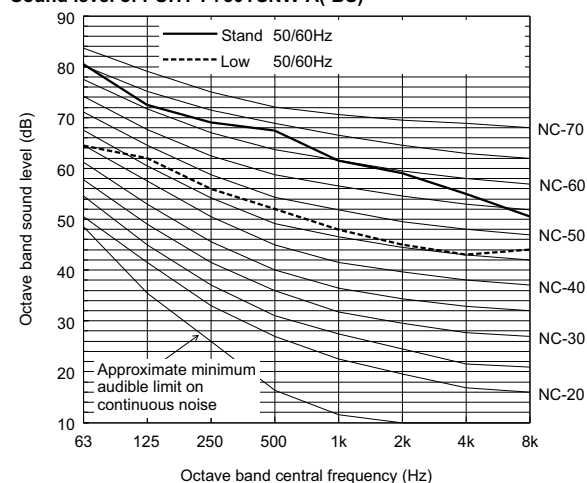
		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	75.5	72.5	67.0	65.5	60.5	57.0	53.5	50.0	67.0
Low noise mode	50/60Hz	66.0	63.5	56.0	53.0	49.0	45.5	44.5	46.0	56.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-P850YSNW-A(-BS)


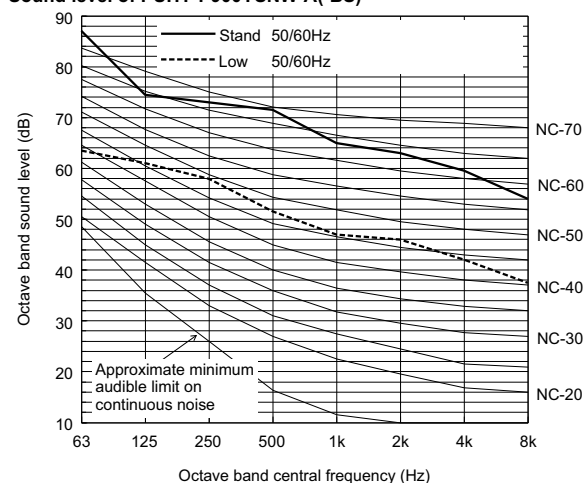
		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	85.5	73.5	72.0	70.5	64.0	62.0	58.0	53.0	71.5
Low noise mode	50/60Hz	62.0	60.0	57.5	51.0	46.0	45.0	41.0	36.5	54.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-P750YSNW-A(-BS)


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	80.5	72.5	69.0	67.5	61.5	59.0	55.0	50.5	68.5
Low noise mode	50/60Hz	64.5	62.0	56.0	52.0	48.0	45.0	43.0	44.0	55.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-P900YSNW-A(-BS)


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	87.0	74.5	73.0	71.5	65.0	63.0	59.5	54.0	72.5
Low noise mode	50/60Hz	63.5	61.0	58.0	51.5	47.0	46.0	42.0	37.5	55.0


When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

♦ Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.

Measurement condition PUHY-P950, 1000, 1050YSNW-A(-BS)

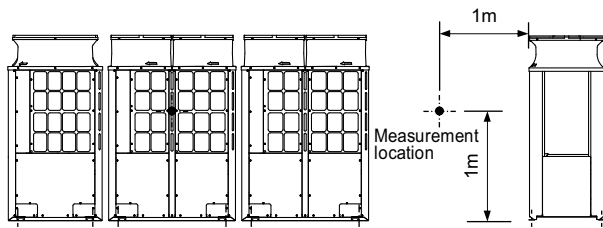


Sound level of PUHY-P1050YSNW-A(-BS)

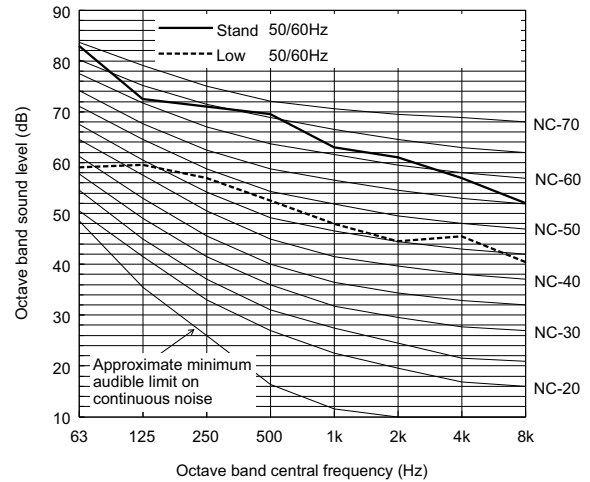

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	83.0	72.5	71.0	69.5	63.0	61.0	57.0	52.0	70.5
Low noise mode	50/60Hz	59.0	59.5	57.0	52.5	48.0	44.5	45.5	40.5	55.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-P950YSNW-A(-BS)

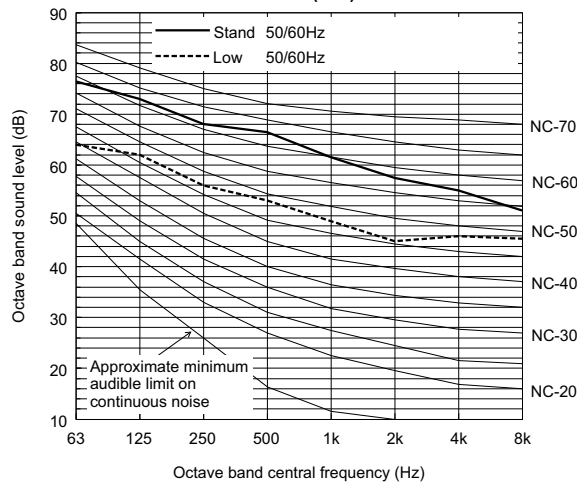

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	76.5	73.0	68.0	66.5	61.5	57.5	55.0	51.0	68.0
Low noise mode	50/60Hz	64.0	62.0	56.0	53.0	49.0	45.0	46.0	45.5	56.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-P1000YSNW-A(-BS)

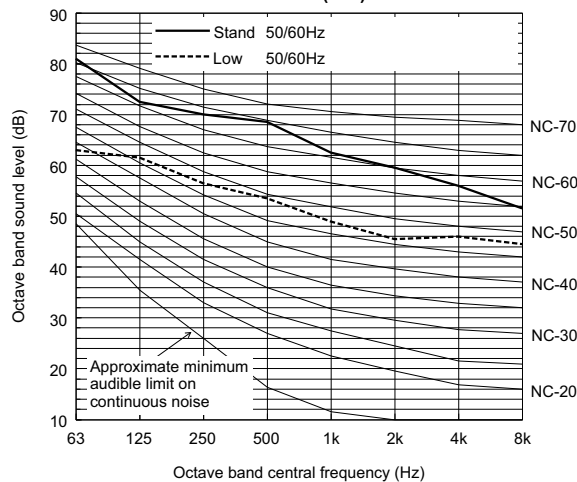


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	81.0	72.5	70.0	68.5	62.5	59.5	56.0	51.5	69.5
Low noise mode	50/60Hz	63.0	61.5	56.5	53.5	49.0	45.5	46.0	44.5	56.0


When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

- Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.

Measurement condition PUHY-P1100, 1150, 1200, 1250, 1300, 1350YSNW-A(-BS)

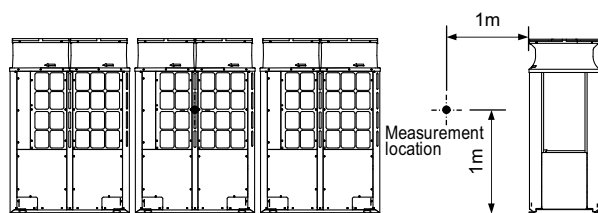


Sound level of PUHY-P1200YSNW-A(-BS)

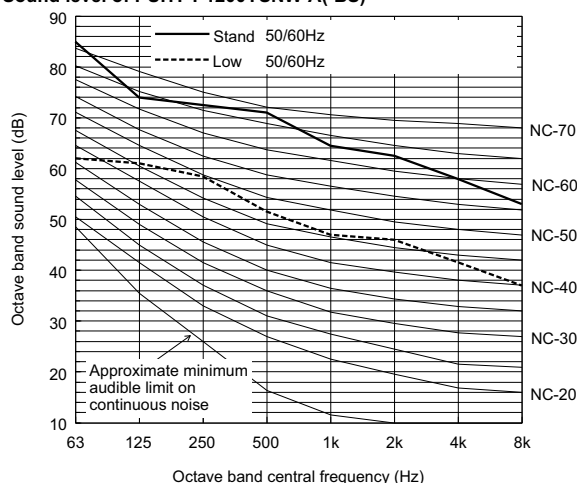

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	85.0	74.0	72.5	71.0	64.5	62.5	58.0	53.0	72.0
Low noise mode	50/60Hz	62.0	61.0	58.5	51.5	47.0	46.0	41.5	37.0	55.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-P1100YSNW-A(-BS)

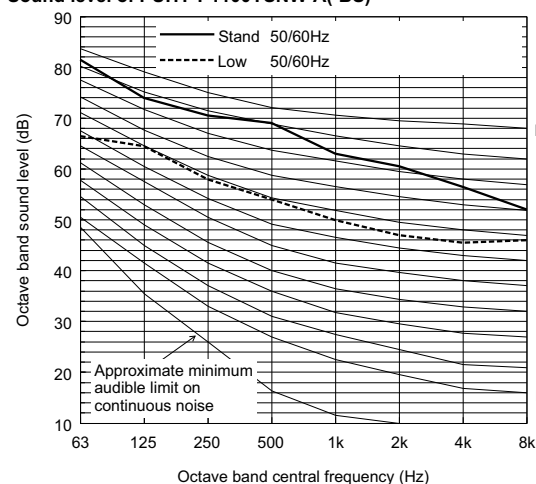

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	81.5	74.0	70.5	69.0	63.0	60.5	56.5	52.0	70.0
Low noise mode	50/60Hz	66.5	64.5	58.0	54.0	50.0	47.0	45.5	46.0	57.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-P1250YSNW-A(-BS)

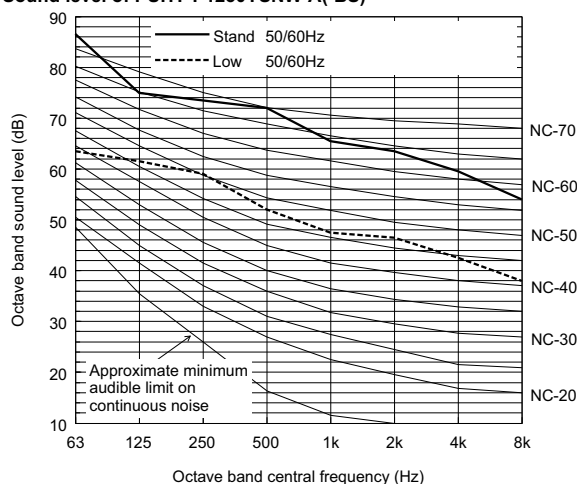

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	86.5	75.0	73.5	72.0	65.5	63.5	59.5	54.0	73.0
Low noise mode	50/60Hz	63.5	61.5	59.0	52.0	47.5	46.5	42.5	38.0	55.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-P1150YSNW-A(-BS)

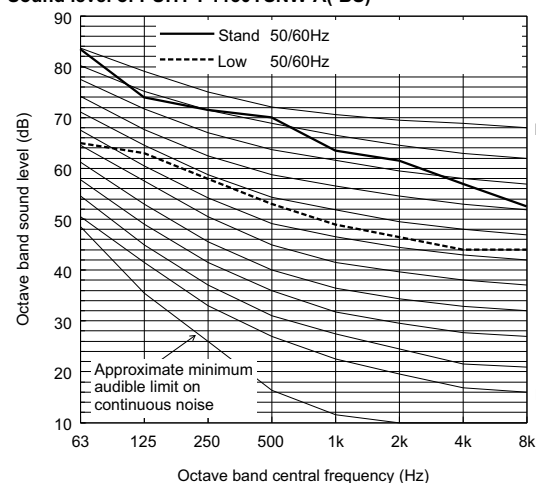

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	83.5	74.0	71.5	70.0	63.5	61.5	57.0	52.5	71.0
Low noise mode	50/60Hz	65.0	63.0	58.0	53.0	49.0	46.5	44.0	44.0	56.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-P1300YSNW-A(-BS)

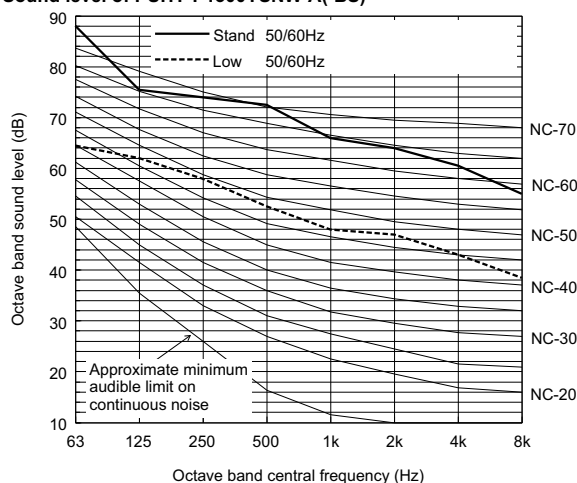

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	88.0	75.5	74.0	72.5	66.0	64.0	60.5	55.0	73.5
Low noise mode	50/60Hz	64.5	62.0	58.0	52.5	48.0	47.0	43.0	38.5	56.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

• Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.

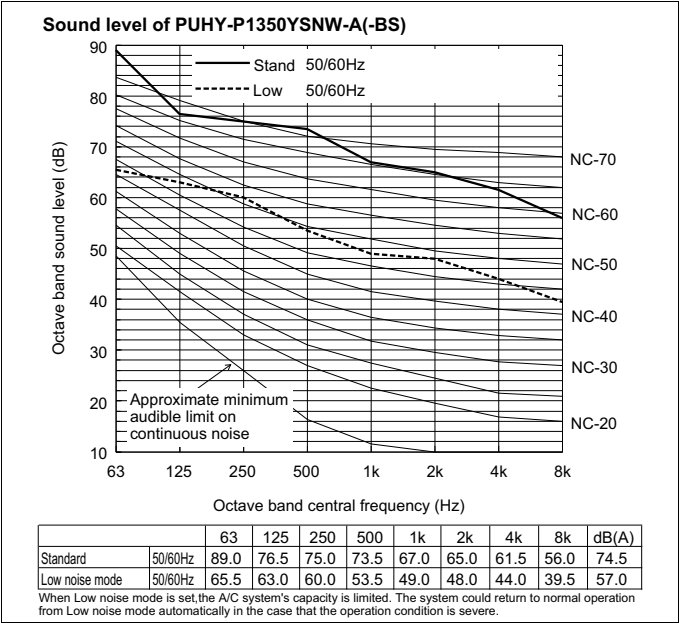

♦Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.