Terrace

Fire Escape

existing gate

unfixed bench location

planter

unfixed bench location

planter

unfixed bench location

planter

planter

planter

Carpark
(21 spaces)

breakout existing surface and form planted bed (using plants as box planters)

existing gates and boundary treatment to be retained

Carpark Plan 1:100

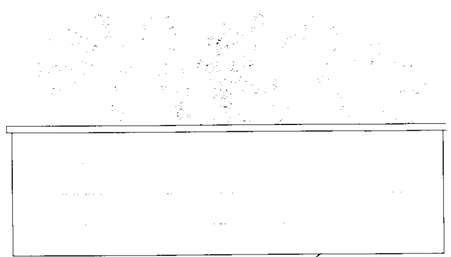

Timber Planter Elevation (freestanding)
1:20

Notes :

The carpark is to receive no white lining. Spaces shown on plan are indicative only. Parking layout suggested by soft landscaping (small trees and raised timber box planters). Limited dedicated parking is proposed for this facility. Existing usage by the RC church and parishoners will be maintained on completion of the works.

Trees to be Sorbus "Sheerwater Seeding" (Rowan) trees for year round colour & berries (height 6-8m max). Trees to have Marshalls 'Pallas' concrete block paving (colour grey granite) set in existing carpark.

Timber box planters to be 2000x1000x600mm (high) formed in planed pressure treated timber with 25x100mm pressure treated coping, DPM to internal face.

Planting for box planters:

1 - Rosmarinus 'Miss Jessop's upright'
2 - Lonicera 'Bagessen's Gold'
3 - Mahonia 'charity'
4 - Photinia 'Red robin'

Rev	Details	Date	Checked By
A	Parking layout amended	11/02/10	AM

planning

BROWNHILL HAYWARD BROWN
CHARTERED ARCHITECTS
GEORGIAN HOUSE 24 BIRD STREET LICHFIELD STAFFS WS13 6PT
TEL 01543 254357 FAX 01543 416540 e-mail mail@bhbarchitects.co.uk

Client Alton School

Project Alton School dormitories

Title Proposed Carpark Landscape Plan

Scale	Date	Drawn By	Checked By	Drawing Number	Revision
1/100@A2	july 09	jw	am	2419-04	A

ISO 9001

The copyright of this drawing and design is vested in the Architect and must not be copied or reproduced without written consent. All dimensions given are to be verified on site by the responsible contractor. Do not scale dimensions from this drawing.