

Roof and verges formed using Metro Tile Roofing Sheets & Accessories

UPVC Fascia Board

Textured External Coating

Front Elevation 1:100



Side Elevation 1:100



UPVC windows fitted with 'K' glass double glazed units to achieve 2.0 W/sqmK

Textured External Coating

Front Elevation 1:100



Side Elevation 1:100

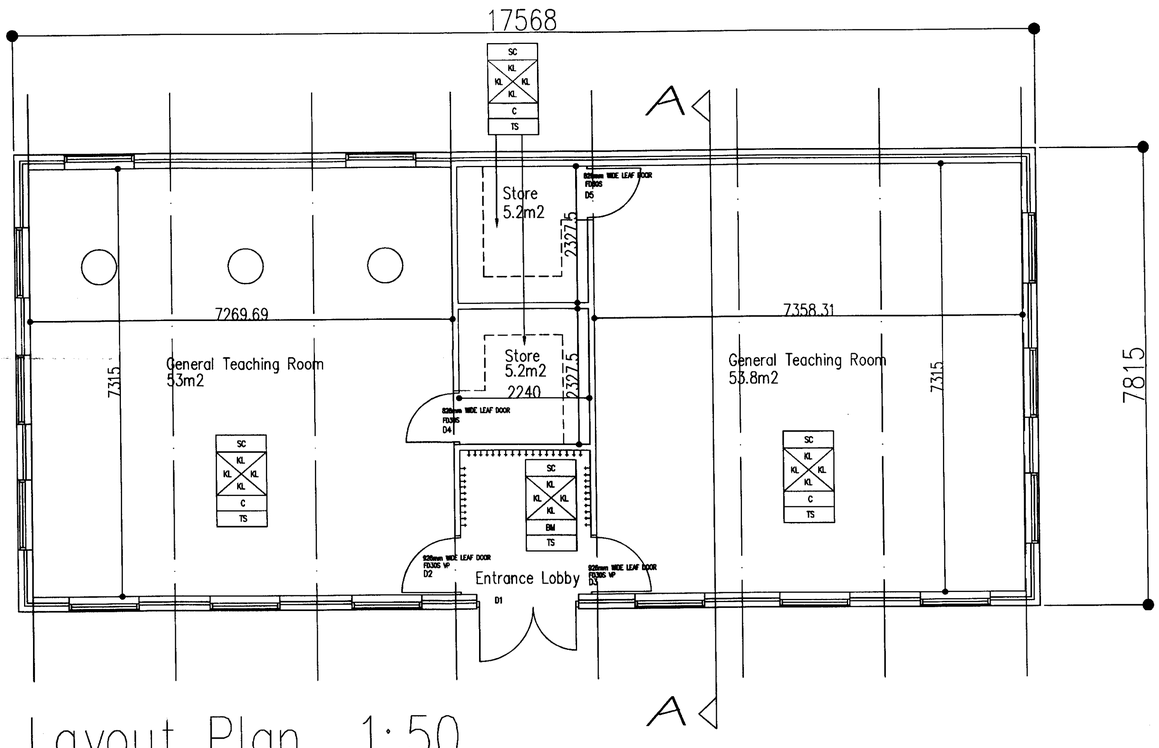

Layout Plan 1:50

Overall Building Area 137.3m2

Modular 1

Notes:

FINISHES SCHEDULE

Ceiling
Wall
Wall
Wall
Floor
Skirting

KL	KRONOSPAN LAMINATE PANELS
TS	TIMBER SKIRTING
SC	15mm PRIMA TEGULAR FINE FISSURED CEILING PANELS 600x600mm, TRULOCK 15 EXPOSED GRID SYSTEM,
C	CARPET SHEET TYPE HECKMONDWIKE SUPERCORD
BM	BARRIER MATTING TYPE HECKMONDWIKE DREADNOUGHT

26 NOV 2009

APP...

DATE V...

S M ...

09/01230/FUL 24 DEC 2009

REVISION	DESCRIPTION	DATE/INITIAL

Staffordshire County Council

Green Hall
Lichfield Road
Stafford ST17 4LA
Tel 01785 223121
Fax 01785 277727

GROUP: Design Group Schools
CHECKED BY: Johnston
ISSUED FOR: Tender

PROJECT: Endon High School
Demolition of Existing 2No Mobiles and Replacement with New Modular Buildings

DRAWING: Proposed Plans & Elevations Replacement Modular for Existing Modular B

FILE Ref: SET 5090
SCALES: 1:50 1:100
DRAWN: RJ
DATE: Oct 2009
DRAWING NO. A/03
REVISION

Copyright in this drawing and design belongs to Staffordshire County Council. Unauthorised reproduction infringes copyright and may result in prosecution or civil proceedings. Contractors must advise the Architect / Project Contract Administrator / Engineer or Surveyor of any variations between this drawing and conditions found on site. DO NOT SCALE. Only written dimensions to be used. This product may include mapping data licensed from Ordnance Survey with the permission of the Controller of Her Majesty's Stationery Office. Crown copyright and / or database right 2008. All rights reserved. Licence Number 100019422.

Original Sheet A1