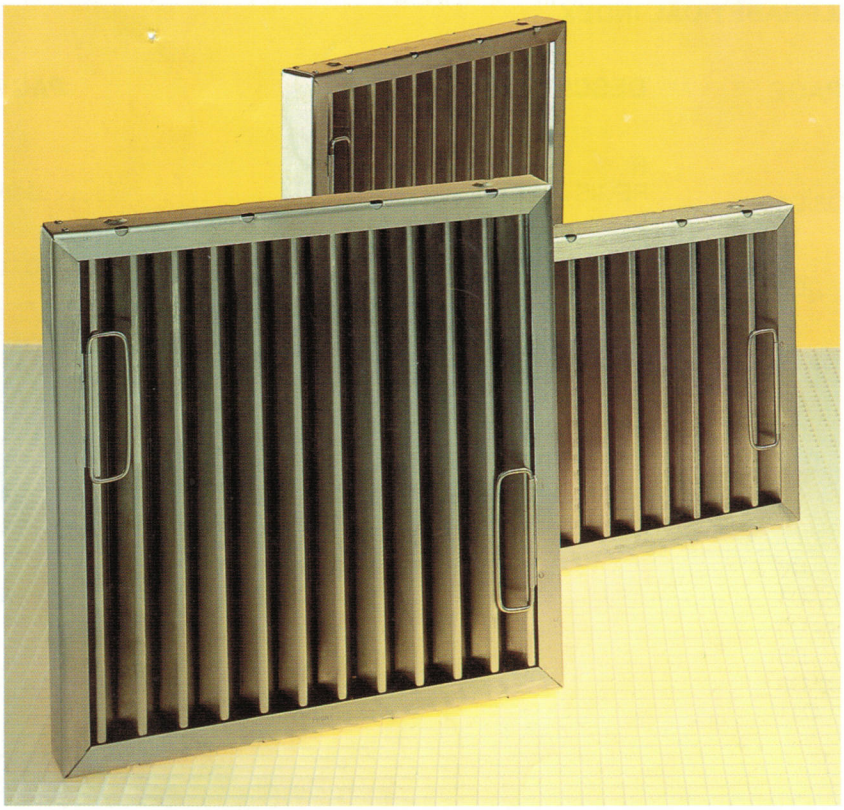

STAINLESS STEEL GREASE FILTERS

DUAL ACTION GREASE FILTER FEATURES:

ACTION ONE provides positive flame barrier protection. Its stainless steel interlocking baffle walls make it the most effective flame barrier of all filters marketed today.

ACTION TWO provides unsurpassed performance in efficient grease removal. The aerodynamic twin-wall "V" baffles continuously separate grease and air. Stainless steel surfaces assure constant run-off and allow grease to be safely deposited in collection troughs.

NSF COMPONENT

STAINLESS STEEL GREASE FILTERS

- SAFEST BAFFLE FILTER AVAILABLE
- PROVIDES POSITIVE FLAME BARRIER PROTECTION
- HEAVY DUTY SOLID STAINLESS STEEL WELDED CONSTRUCTION
- STURDY DROP HANDLES PROVIDED
- POLISHED VANES PROVIDE SELF-DRAINING GREASE RUN OFF
- HIGHLY EFFICIENT IN GREASE REMOVAL
- PATENTED VANE DESIGN PREVENTS GREASE FROM DRIPPING -FOOD, UTENSILS AND BURNER SURFACES REMAIN CLEAN
- RUGGED, WELDED STAINLESS STEEL CONSTRUCTION OFFERS EASY CLEANABILITY, CAN WITHSTAND TODAY'S HARSH CLEANING SOLUTIONS, AND FITS IN STANDARD SIZE DISHWASHER
- ECONOMICAL...NEVER NEEDS REPLACING
- RECOMMENDED BY LEADING CONSULTANTS AND DESIGNERS
- MEETS REQUIREMENTS OF NATIONAL FIRE PROTECTION ASSOCIATION BULLETIN #96
- TESTED AND CLASSIFIED BY UNDERWRITERS LABORATORIES, INC. FILE #R 10173

F60 SERIES STAINLESS STEEL FILTERS W/DROP HANDLES (STANDARD)

SIZE	CHG MODEL #	STANDARD-KEIL #	WGT. (LBS/KG)
16 x 20 (406mm x 508mm)	**F60-1620**	2610-1620-1251	8-1/2 (3.85kg)
20 x 20 (508mm x 508mm)	**F60-2020**	2610-2020-1251	10-1/4 (4.65kg)
25 x 20 (635mm x 508mm)	**F60-2520**	2610-2520-1251	12 (5.44kg)

FILTERS WITH LOCKING HANDLES

ARE AVAILABLE TO COMPLY WITH MARYLAND, VIRGINIA AND WASHINGTON D.C. SPECIFICATIONS FOR COMMERCIAL HOODS.
TO ORDER STATE SIZE WITH PREFIX...

F61...WITH 2 LOCKING HANDLES

F62...WITH 4 LOCKING HANDLES

CHG COMPONENT HARDWARE GROUP, INC.
www.chgusa.com