

Proposed South Elevation
1 : 50



Proposed West Elevation
1 : 50



Proposed North Elevation
1 : 50

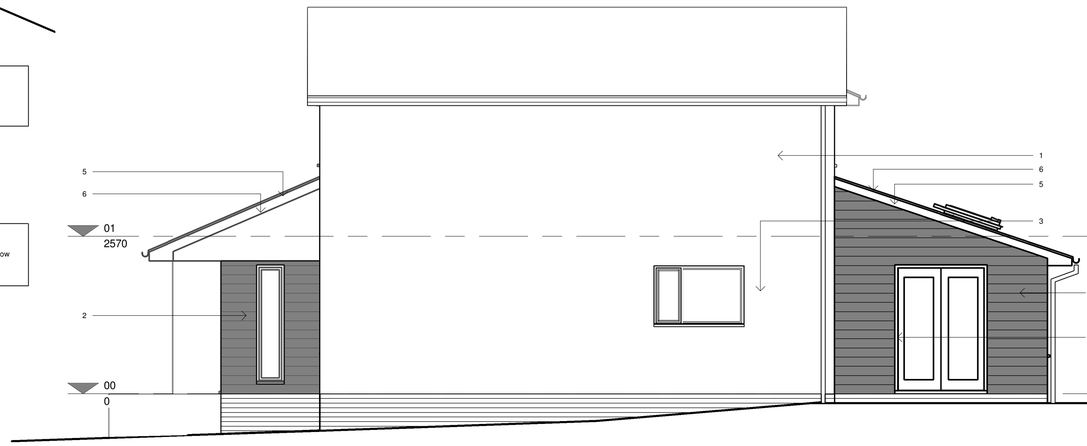

Proposed East Elevation
1 : 50

All heights, sizes and dimensions should be checked on site by the contractor before any work is put in hand.

Figured dimensions should be taken in preference to scaling and any errors or omissions reported to the architect at once

This drawing has been prepared in accordance with the CDM [Construction Design and Management] and all foreseeable design risks to those involved or affected by construction have been avoided wherever possible

Proposed Materials;

1. Walls; Facing brickwork
2. Grey colour tmber cladding
3. Windows; Grey UPVC double glazed windows
4. Doors; Grey UPVC doors and frames
5. Roof; Concrete roof tiles to match existing
6. Fascias and Soffits; Grey UPVC
7. Rainwater goods; White UPVC
8. Velux rooflight
9. Timber frame dormer window

Glazing Calculations;
25% of extended floor area = 15.25m²
Omitted glazing = 9.5m²
Total permissable = 24.75m²

Area of new glazing = 19.8m²

Rev	Date	By	Detail

Drawing status
S4

Client
Mr and Mrs G. McArdle

Project/Location
Rear & Side Extension
3 Chestnut Close
Tean
Staffordshire
ST10 4JD

SMYTHEMAN ARCHITECTURAL
12 High Street
Tean
Stoke-on-Trent
ST10 4DZ
United Kingdom
T +44 (0)1538 722097
F +44 (0)1538 722185
mail@smytheman.co.uk
www.smytheman.co.uk

Drawing title
Proposed Elevations

Scale(s)	Date	Drawn	Checked	Job Number
1 : 50 @A1	10/08/18	GL	SS	3111

Drawing number **Revision**
MA18-SA-XX-XX-DR-A-0402

\\NAS-6E-EB-28\Documents\Drawings\Current Drawings\3111 MCARDLE\01-Architectural\MA18-SA-M3-A-0002.rvt