
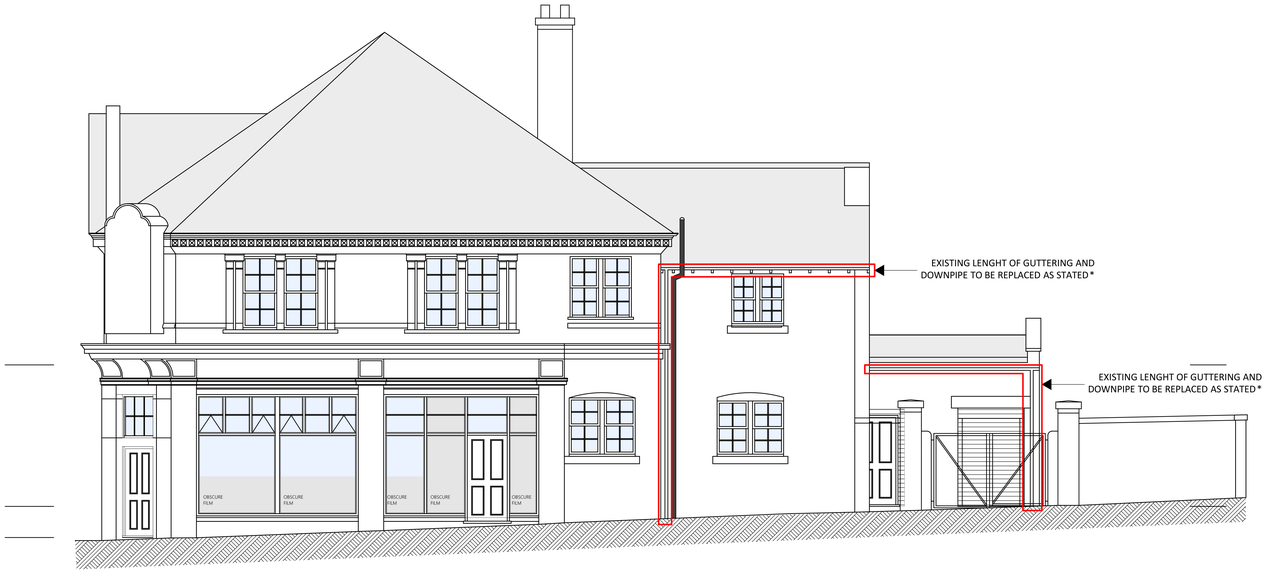


SIDE ELEVATION

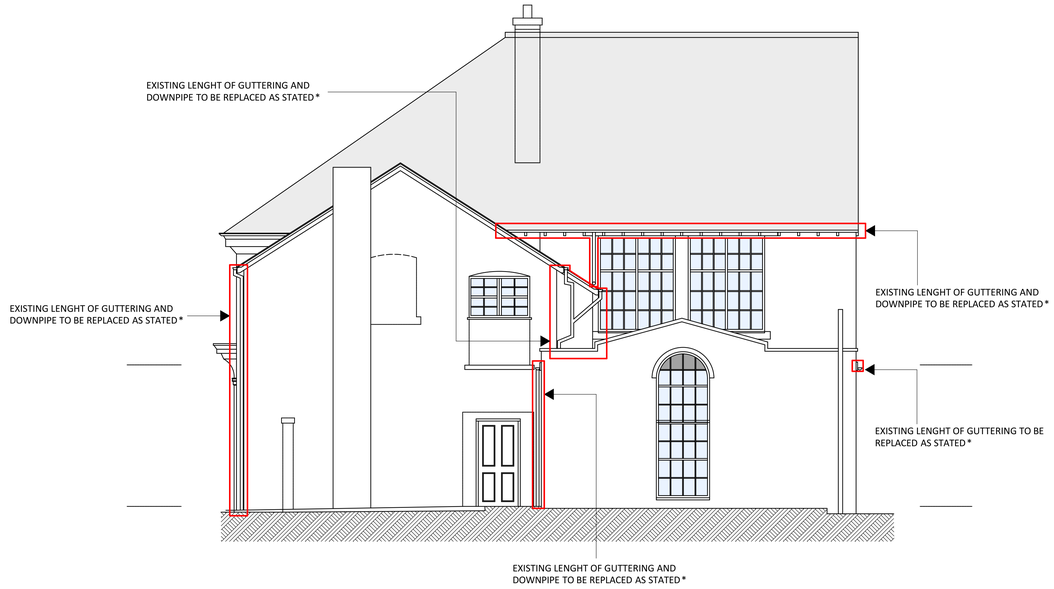

REAR ELEVATION

*GUTTERING TO BE REPLACED HIGHLIGHTED IN RED. PLEASE REFER TO SCHEDULE OF EXTERNAL WORKS - 18.4.18.

EXISTING GUTTERING TO BE REPLACED WITH NEW CAST IRON EFFECT BLACK UPVC GUTTERING, COMPLETE WITH BRACKETS TO MATCH EXISTING STYLE AND SIZES. GUTTERING TO BE OF OGREE PROFILE AS SHOWN IN IMAGE 1.

EXISTING DOWNPIPES TO BE REPLACED WITH NEW CAST IRON EFFECT BLACK UPVC AND 68MM IN DIAMETRE.


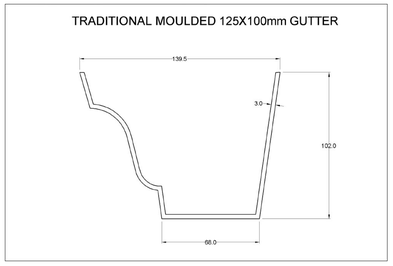


IMAGE 1



FRONT ELEVATION

0 1 2 3 4 5

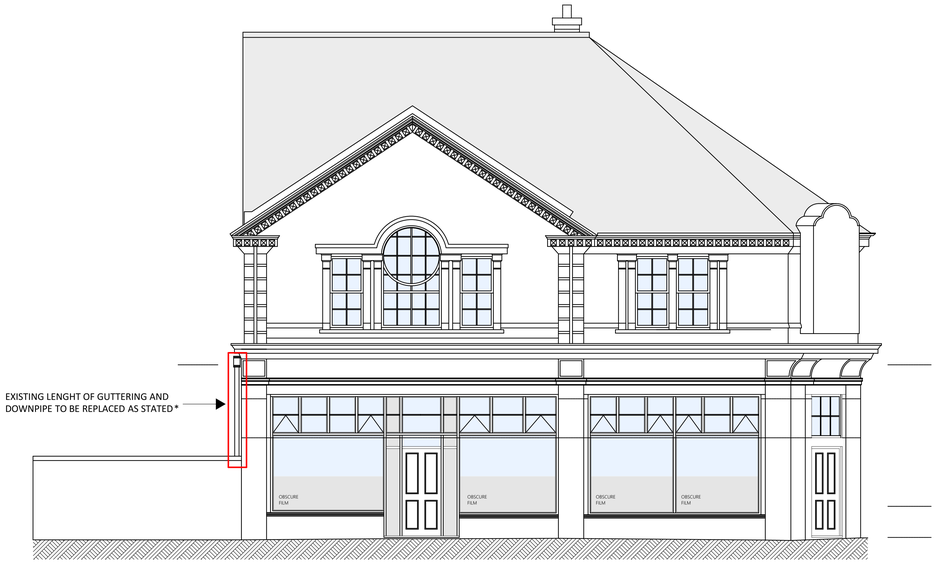

SIDE ELEVATION

Rev/ID	Issue Date	Comment	Modified By	Checked By

Drawing Status

wood goldstraw yorath
ARCHITECTS QUANTITY SURVEYORS CDM CO-ORDINATORS
Churchill House, Regent Road, Stoke on Trent, ST1 3RH.
Tel. 01782 208000 Fax. 01782 208712 E-mail: info@woodgoldstraw.co.uk
http://www.woodgoldstraw.co.uk/

Client
YOUR HOME PROPERTIES

Project
PROPOSED REDEVELOPMENT OF 34-36 PICTON STREET LEEK

Scale		Issue Date
1:50		17/04/2019
Sheet Size: A0	Drawn	Checked

Title
REPLACEMENT RAINWATER GOODS

Drawing Number	Revison ID
4333-01-15	

CAD file path:
X:\2-YR PROJECTS\4333 Your Home Properties\4333-01 Picton Street Proposed Apartments\Design\WCH DWGS\WORKING DRAWING - UPDATE 30-08-17.pln

Copyright. Wood Goldstraw & Yorath.
Contractors are to check all dimensions on site and refer any discrepancies to the Architect immediately. Figured dimensions are to be taken in preference to scaled dimensions. Whilst every effort has been made to ensure digital document is accurate at the stated scale. However, we cannot accept liability for the accuracy of third party data (OS mappings, topographical survey information, etc) used in the production of this document. Any dimensions taken from this drawing are approximate and are noted for reference and any further specific dimensional information can be provided upon request.