


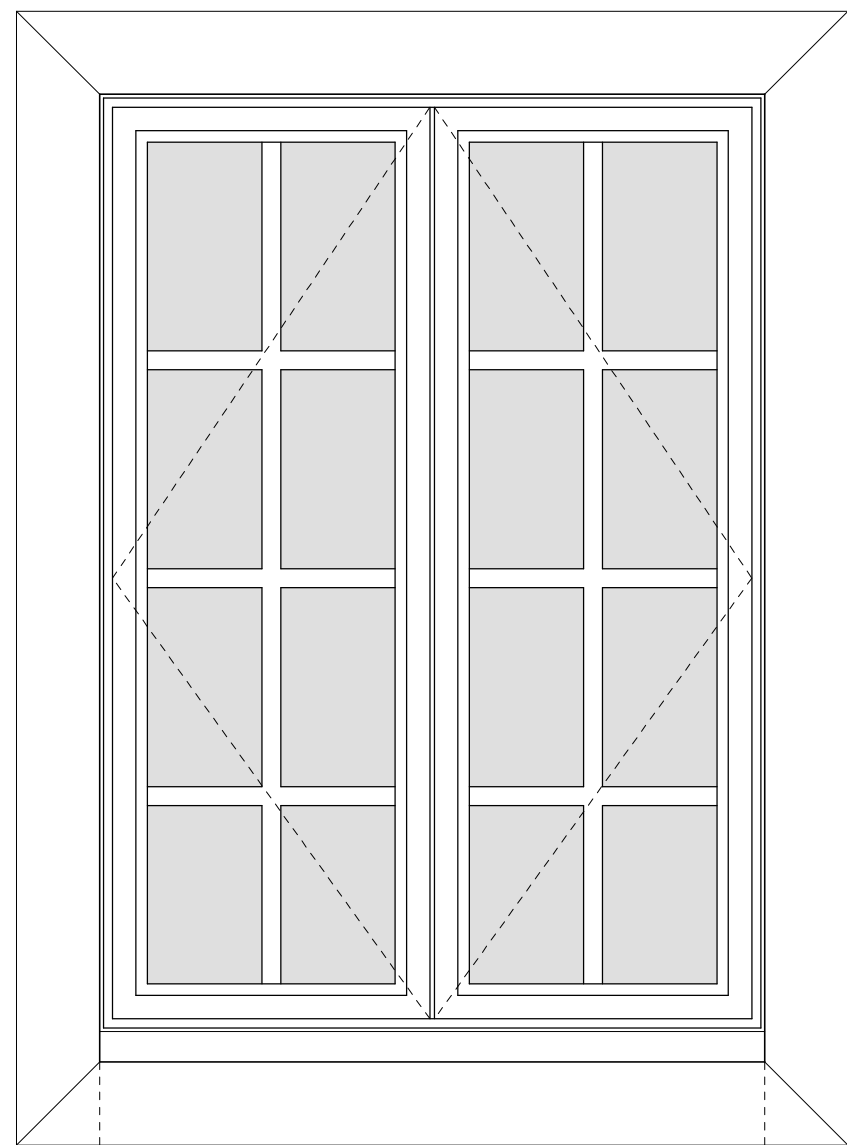


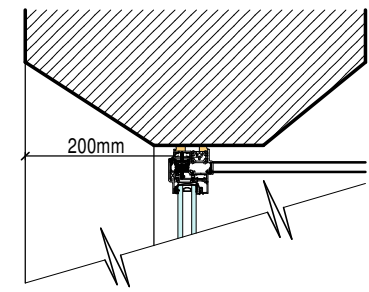


Double Casement Window - Elevation

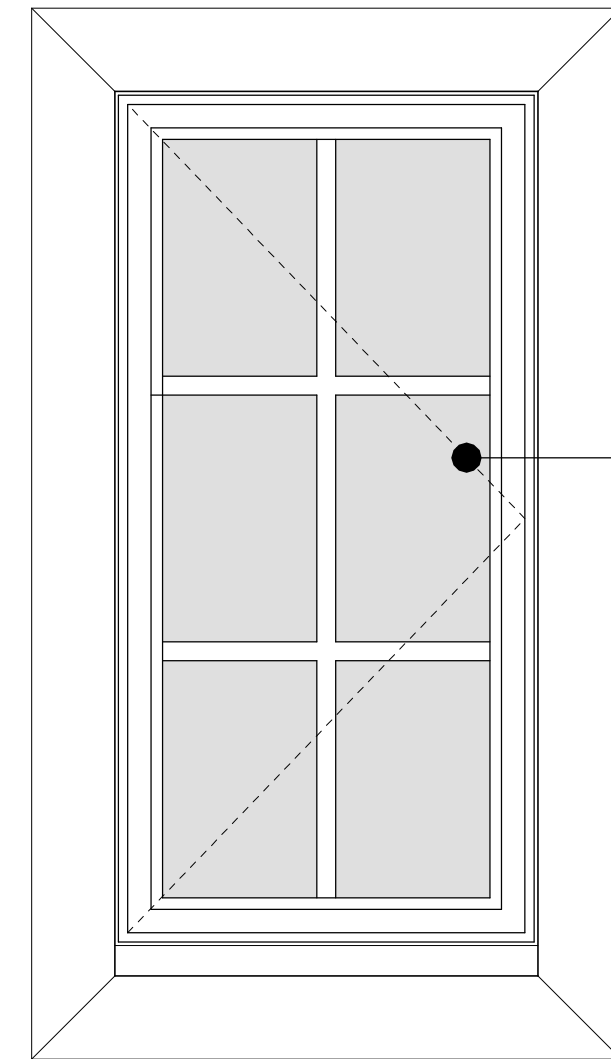



Double Casement Window - Section

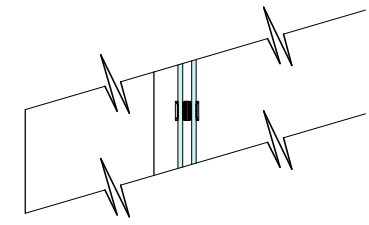

Single Casement Window - Elevation

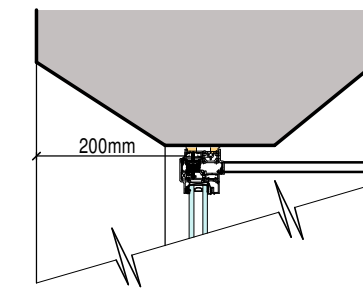



Single Casement Window - Section

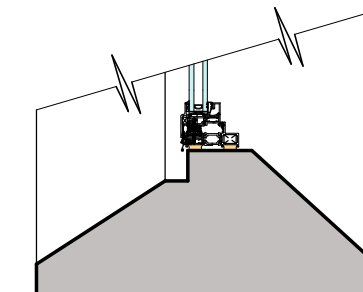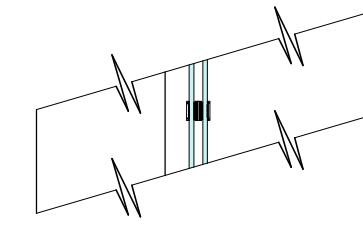


NOTES -
All sizes shall be measured on site by the manufacturer.
Check on site prior to commencement.
These details are to form part of the planning conditions for application SMD/2021/0775

WINDOWS
(max 'U' value 1.4W/m²K)
Shall be 'Smart Architectural Aluminium - Alitherm Heritage' windows finished in Pure White RAL 9010.
Windows to comply with the requirements of PAS 24:2012 enhanced security performance and to have a Secured by Design licence.
All double glazed to domestic rooms utilising low-E glass. Manufacturer's certified 'U' values must be obtained and passed onto L.A. Building Inspector for approval.
Glazing to be 28mm thick units with toughened exterior pane.

GLAZING
All glass installed within these works shall comply to the requirements of current Building Regulations Part K utilising glass to BS EN 12600 Section 4 and BS 6206 in critical locations. (i.e. windows below 800mm from the floor; doors and first 300mm of side screens within 1500mm of the floor).

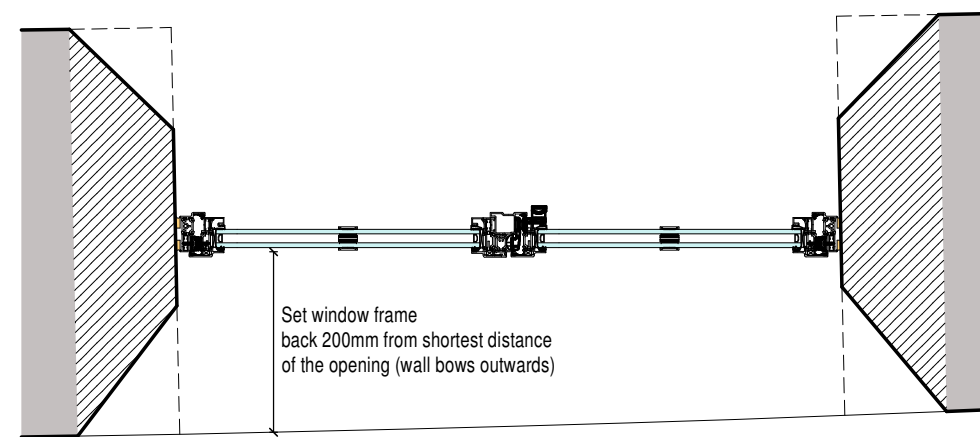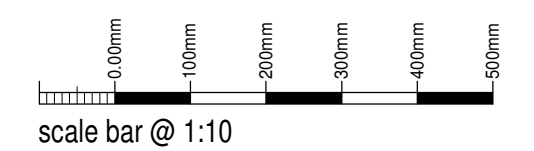

Double Casement Window - Plan

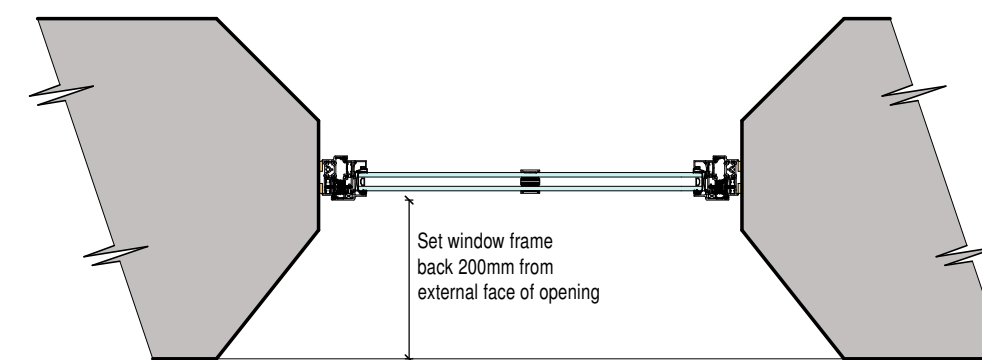

Single Casement Window - Plan

Mr J Shaw

Proposed Change of Use
to Residential
'The Boathouse',
Rudyard, Leek, Staffs

Planning Conditions
Casement Window Details

Date	Sheet	Scale
June 2024	A1	1:10
Dwg No.	Rev.	Drawn
2020-2578-06	-	NAW

SAMMONS
Architectural Ltd
10 Cawdry Buildings, Fountain Street, Leek, ST13 6JP
Telephone: 01538 386002
E-mail: info@sammonsltd.co.uk
Web: www.sammonsltd.co.uk

This drawing is copyright.
All dimensions must be checked prior to commencement.