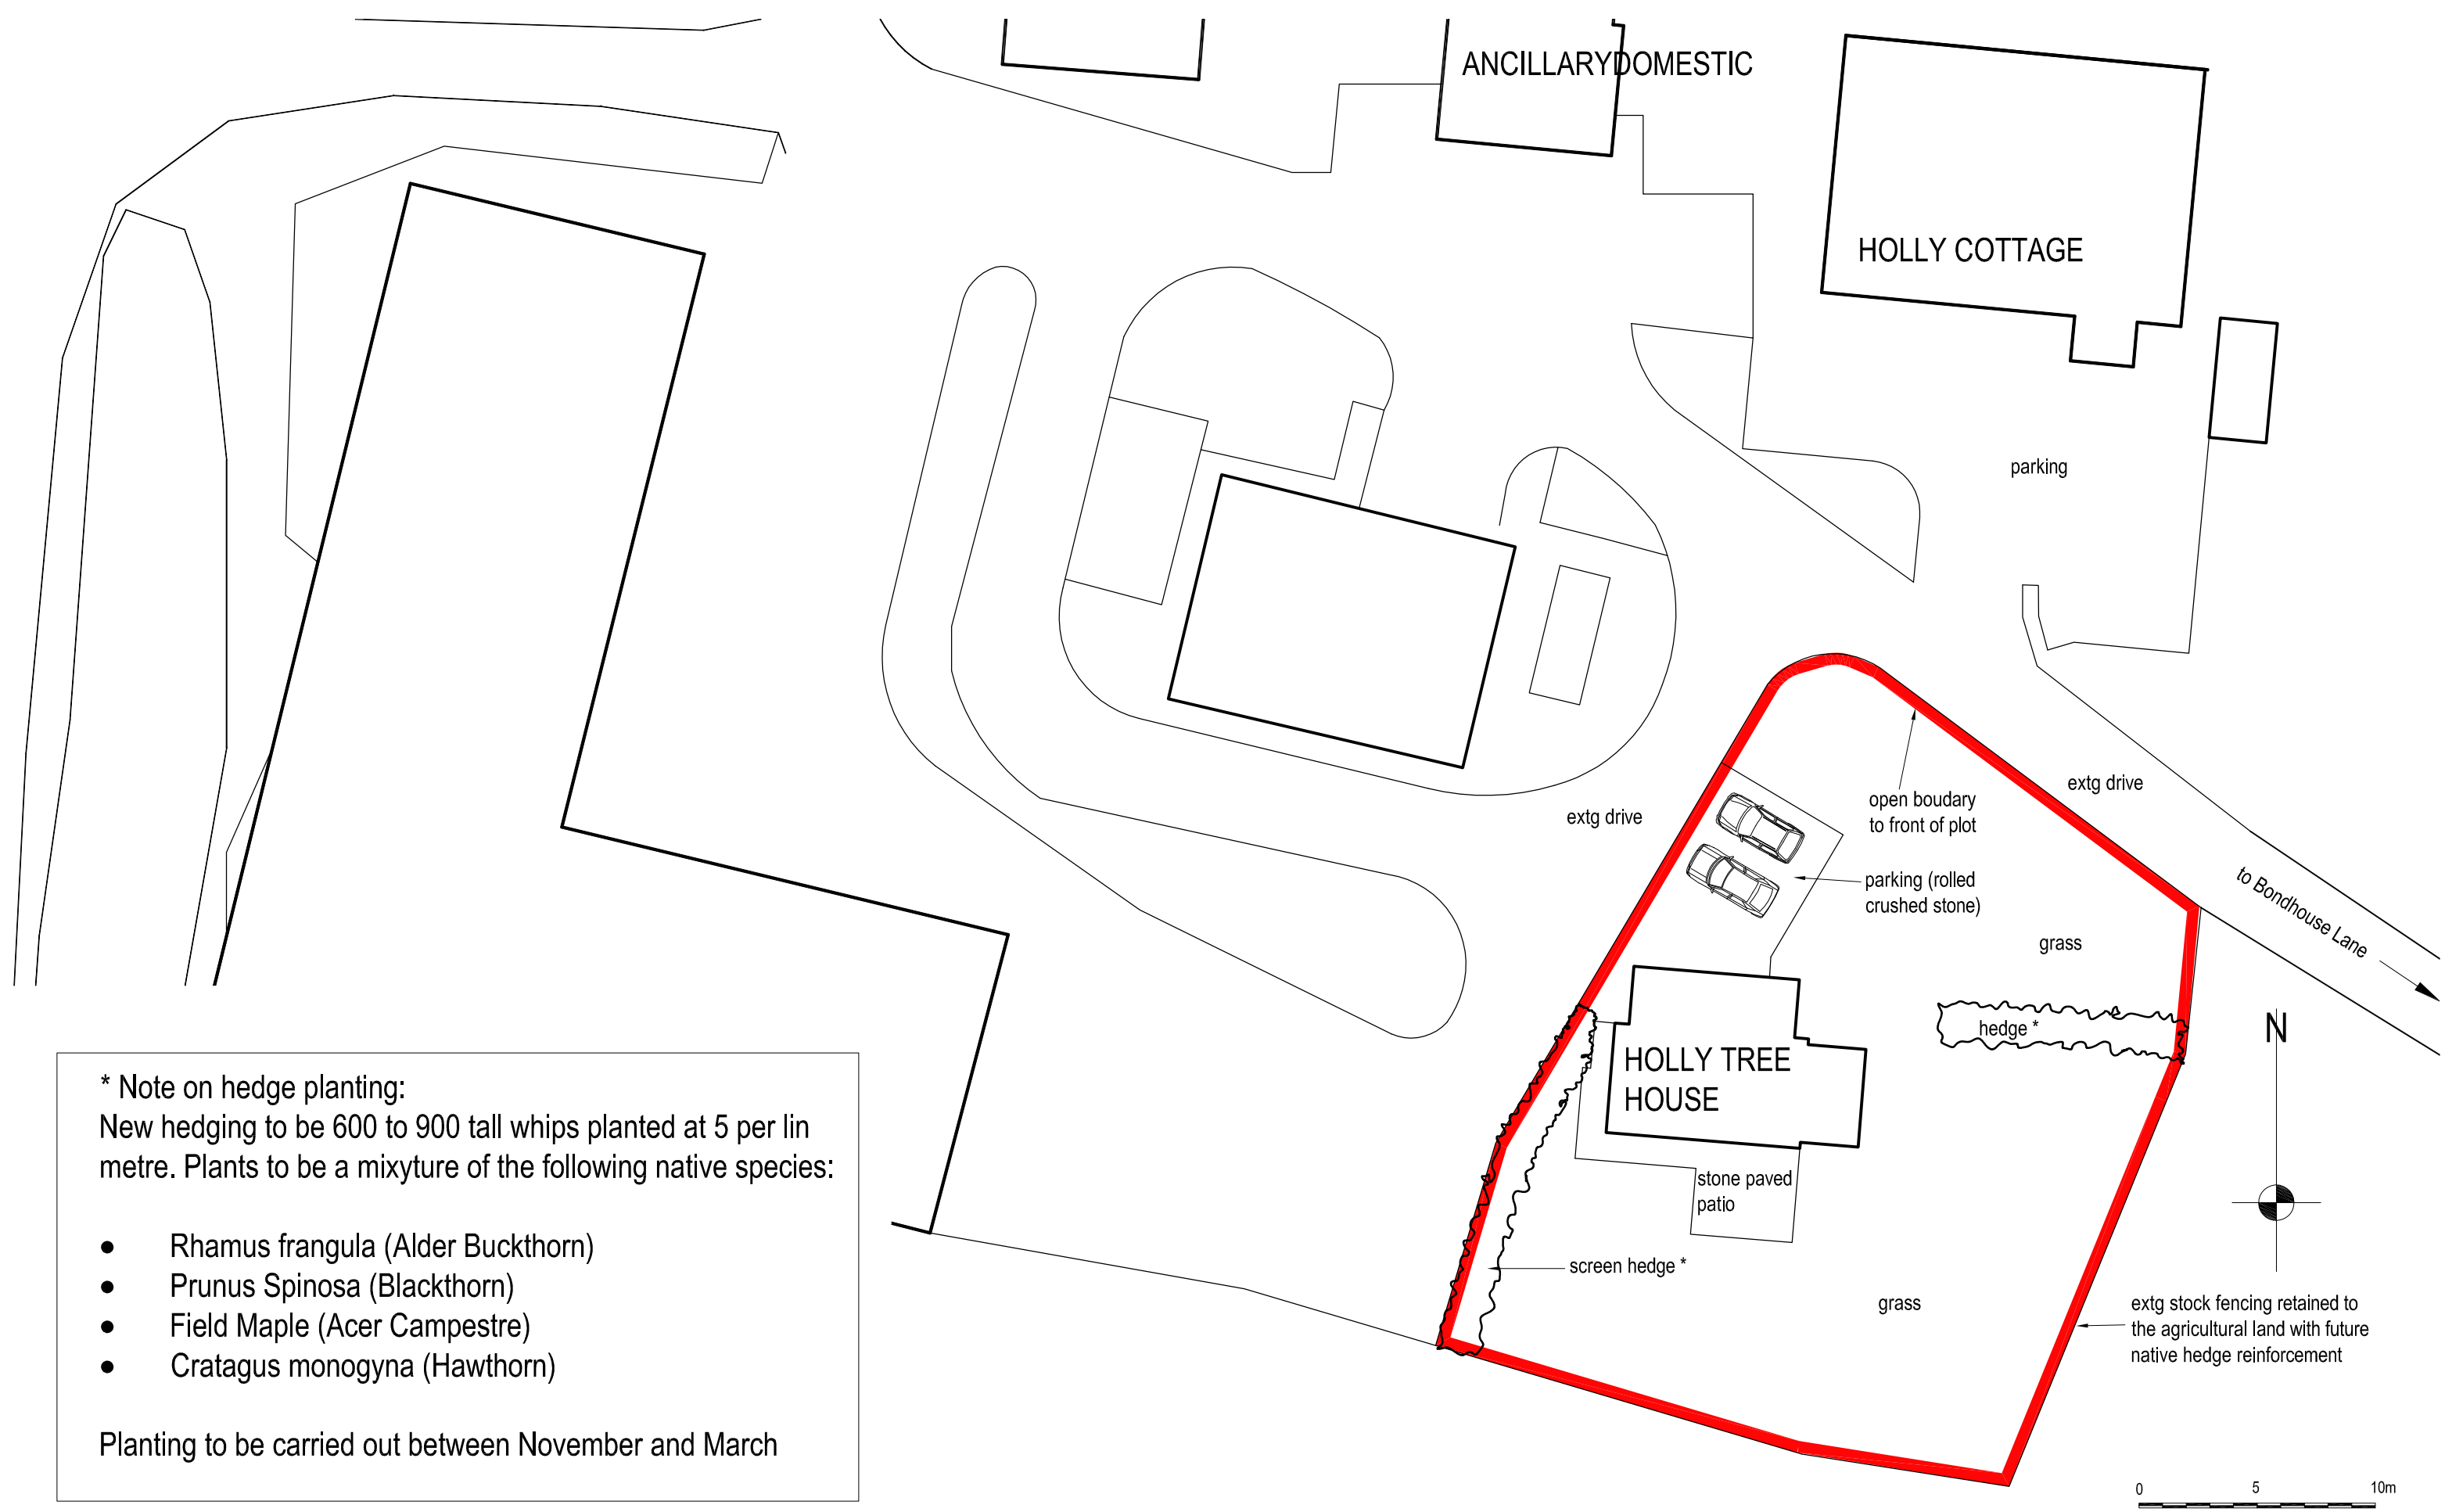

* Note on hedge planting:
New hedging to be 600 to 900 tall whips planted at 5 per lin metre. Plants to be a mixyture of the following native species:

- Rhamus frangula (Alder Buckthorn)
- Prunus Spinosa (Blackthorn)
- Field Maple (Acer Campestre)
- Cratagus monogyna (Hawthorn)

Planting to be carried out between November and March

Revisions

A	Footprint of proposed house reduced in line with Scheme 4	15.01.18
B	Hedge planting spec added	29.07.19

job Holly Tree House, Horton Renovation and Alterations

title Site Plan

date 08.11.17 scale 1/250 @ A3 dwg. no. HTH-07 rev. B

Ian Ankers architecture
Building and Design Consultants
Ryecroft Farm, Rushton Spencer, Macclesfield, SK11 0RP
t 01260 546944
e ian@ianankers.co.uk
w www.ianankers.co.uk