All heights, sizes and dimensions should be checked on site by the contractor before any work is put in hand.
Figured dimensions should be taken in preference to scaling and any errors or omissions reported to the architect at once
This drawing has been prepared in accordance with the CDM (Construction Design and Management) and all foreseeable design risks to those involved or affected by construction have been avoided wherever possible




**Principle Elevtion - As Existing**
1:100




**Side Elevtion - As Existing**
1:100




**Rear Elevtion - As Existing**
1:100




**Side Elevation - As Existing**
1:100

## General Notes;

Existing materials

1. Walls; Facing brickwork
2. Windows; Brown timber/ UPVC double glazed windows
3. Doors; Brown timber doors
4. Roof; Slate tile roof
5. Rainwater pipes/ gutters; Brown PVC Gutters and downpipes
6. Fascias; Brown timber fascias

Areas;
Ground Floor Area; 87.7m$^2$
First Floor Area; 69.8m$^2$
Total Existing Area; 157.5m$^2$

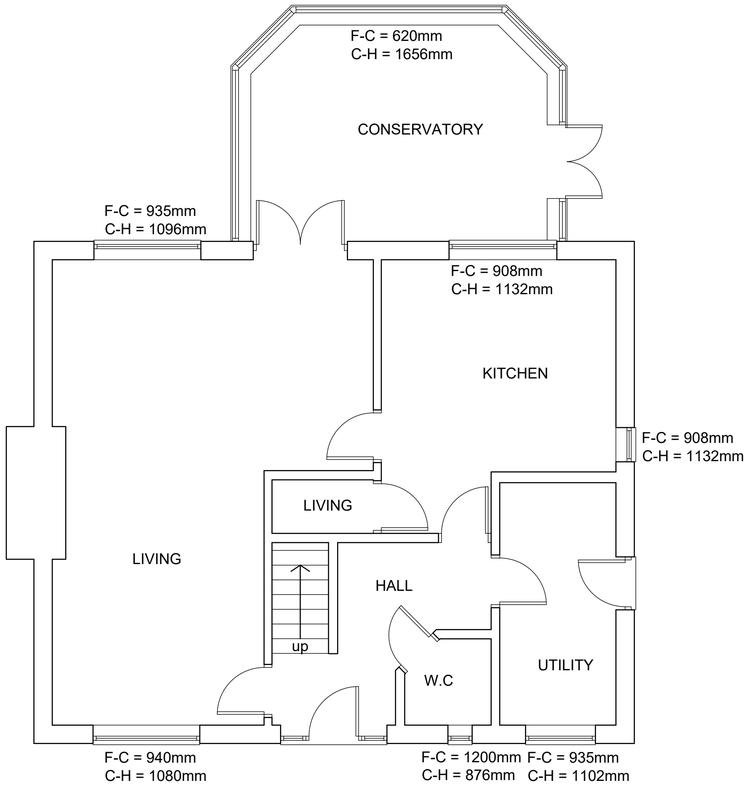


**Ground Floor Plan - As Existing**
1:50




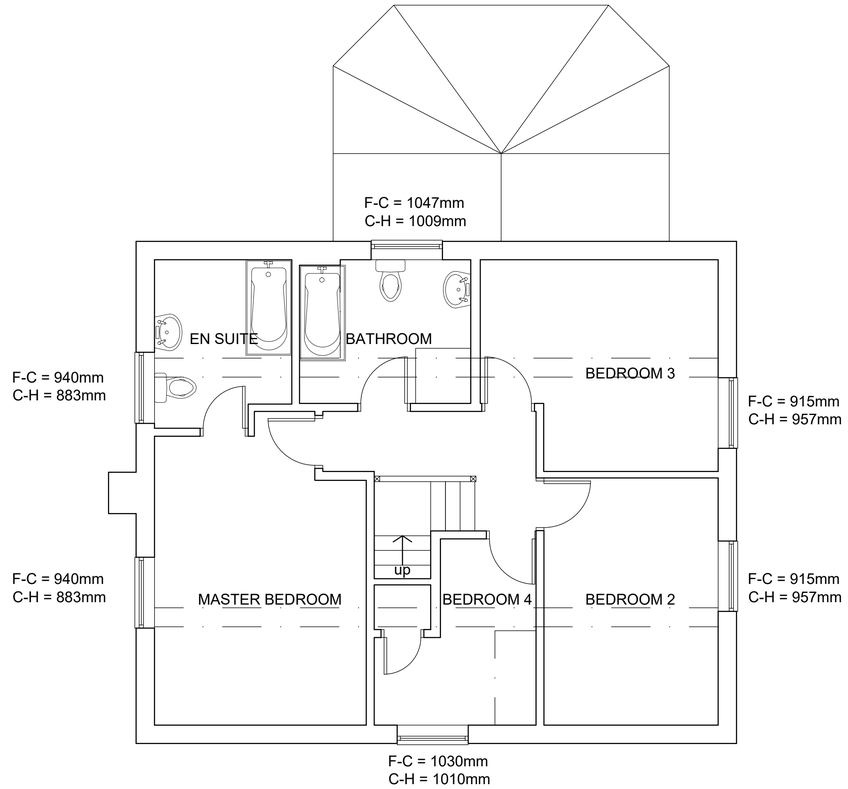


**First Floor Plan - As Existing**
1:50

| Rev | Date | By | Detail |
|---|---|---|---|
| B | 2022/07/20 | | Extg windows added to elev's<br>Drawing description amended<br>Titles amended |
| A | 2022/07/06 | | Scale bar adjusted |

**Drawing status**
Planning Application

**Client**
Mr & Mrs Bostock

**Project/Location**
Proposed one and half storey rear extension with dormer windows and internal works

Quarry Bungalow
Uttoxeter Road
Blythe Bridge
Stoke-On-Trent
ST11 9ND

**Drawing title**
**Plans and Elevations As Existing**

| Scale(s) | Date | Drawn | Checked | Job Number |
|---|---|---|---|---|
| As indicated @A1 | 14/03/20 | -- | -- | 0011 |

**Drawing number** PB22-GBD-XX-XX-DR-A-002

**Revision** B